

PERPENDICULAR STRIPS

◆ STRIP TYPE WK 100

Strips formed of hard aluminum foil, thickness 0,5mm in a shape of vertical blades of 100cm height, coated in both sides with electrostatic polyester powder. They are placed in a supporting beam of galvanized sheet steel sections, with dimensions 20 x 40mm and 0,6mm thickness with notches, so that the blades create openings 100mm. They are suspended from the ceiling with special fast and safe leveling galvanized hangers.

◆ STRIP TYPE WK 150

Strips formed of hard aluminum foil, thickness 0,5mm in a shape of vertical blades of 150cm height, coated in both sides with electrostatic polyester powder. They are placed in a supporting beam of galvanized sheet steel sections with dimensions 20 x 40mm and 0,6mm thickness with notches, so that the blades create openings 150mm. They are suspended from the ceiling with special fast and safe leveling galvanized hangers.

◆ INSTALLATION

The supporting beam is suspended from the ceiling per 1,20m via ceiling hangers, the runners are placed in a 1,20m distance between them, whereas at the edges, are placed in a distance less than 30cm.

The strips are fixed in the supporting beam with a simple pressure from the bottom, within the respective notches of the supporting beam. At the edges, the strips are placed 2-3cm by the wall, whereas the distance between middle ends of the strips is 2cm.

APPLICATIONS




◆ COMMERCIAL CENTERS - MALLS

◆ HOTELS


◆ AIRPORTS

◆ CINEMAS


WK 100

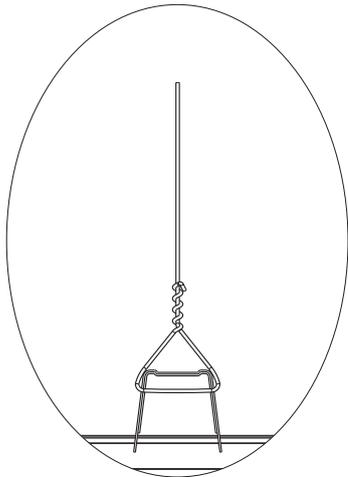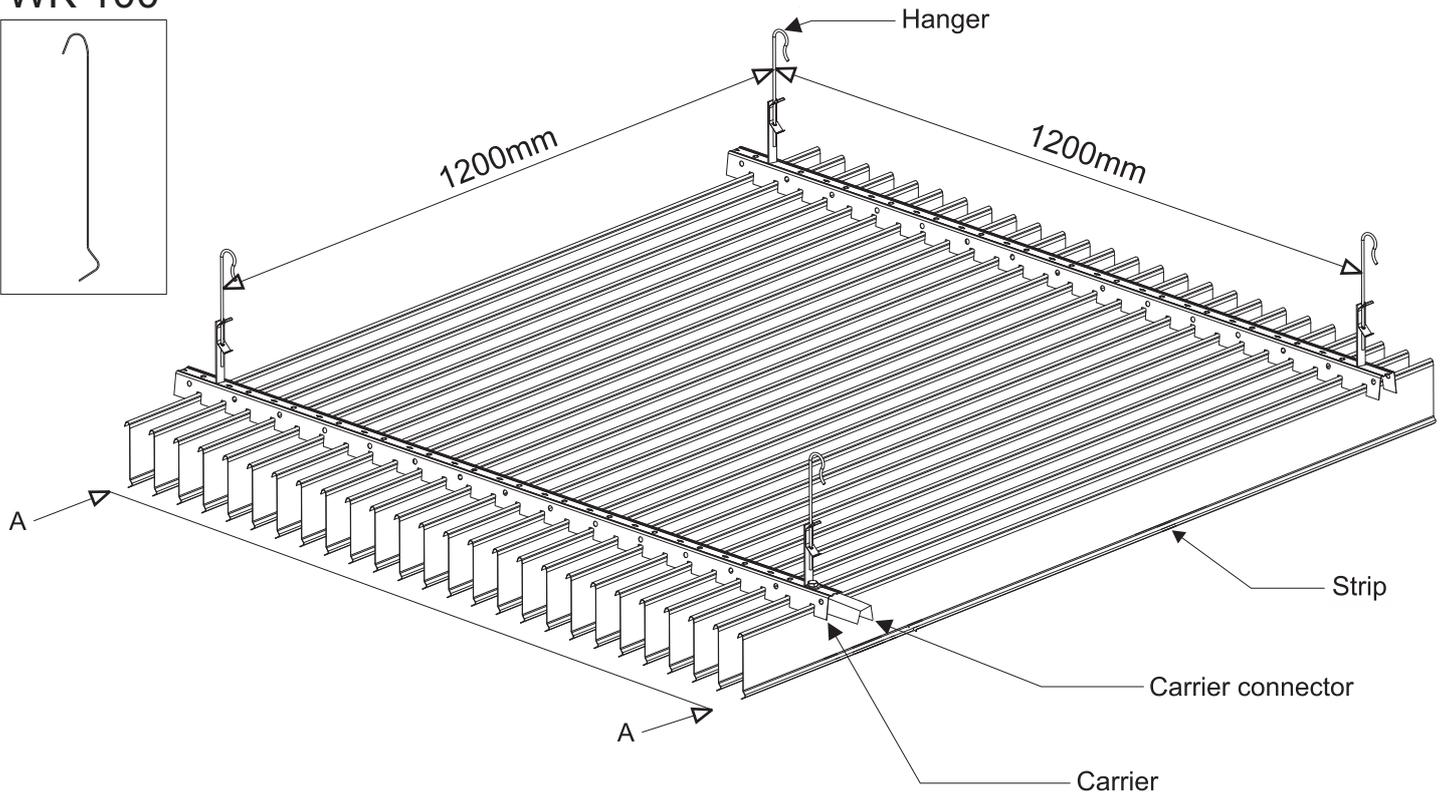


HANGER DETAIL OPTION 1:
PLAIN WIRE

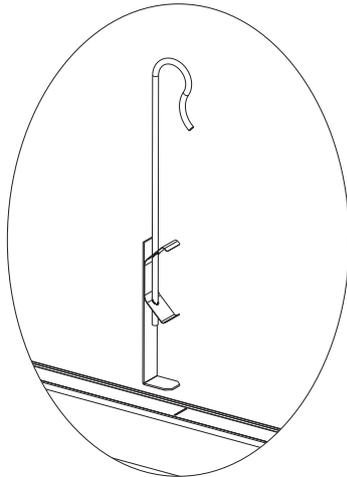

HANGER DETAIL OPTION 2:
SLOT-IN HANGER WITH
SPRING CLIP

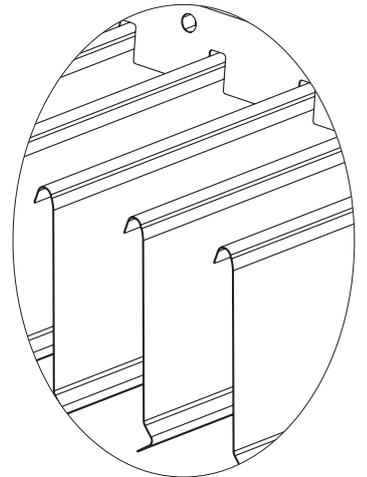




ASSEMBLY DETAIL

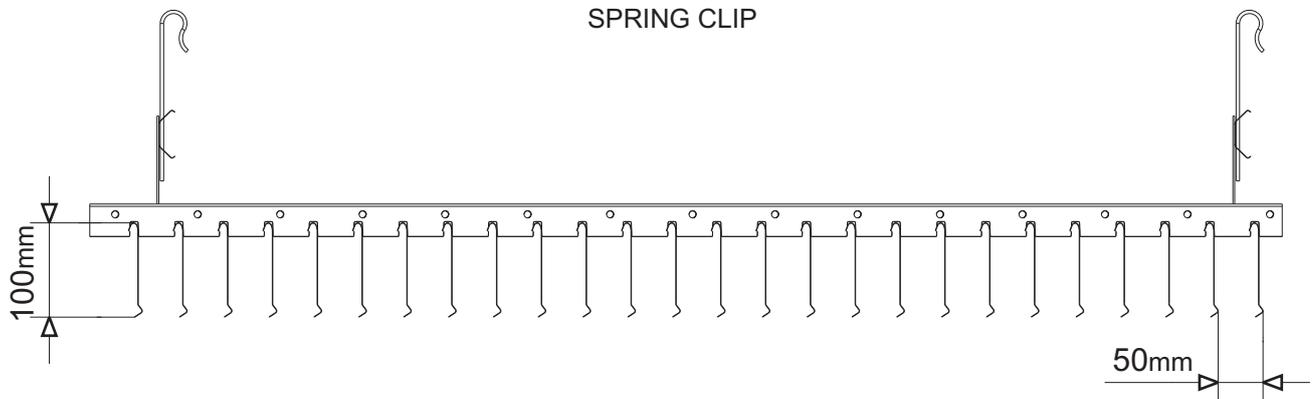


DETAIL A-A




WK 150

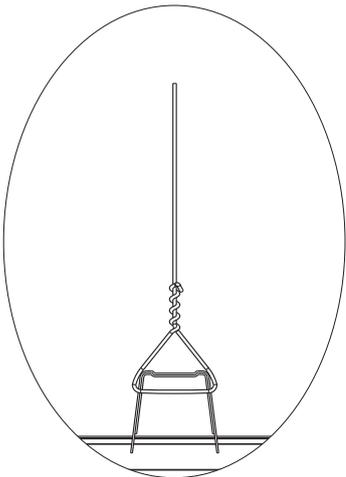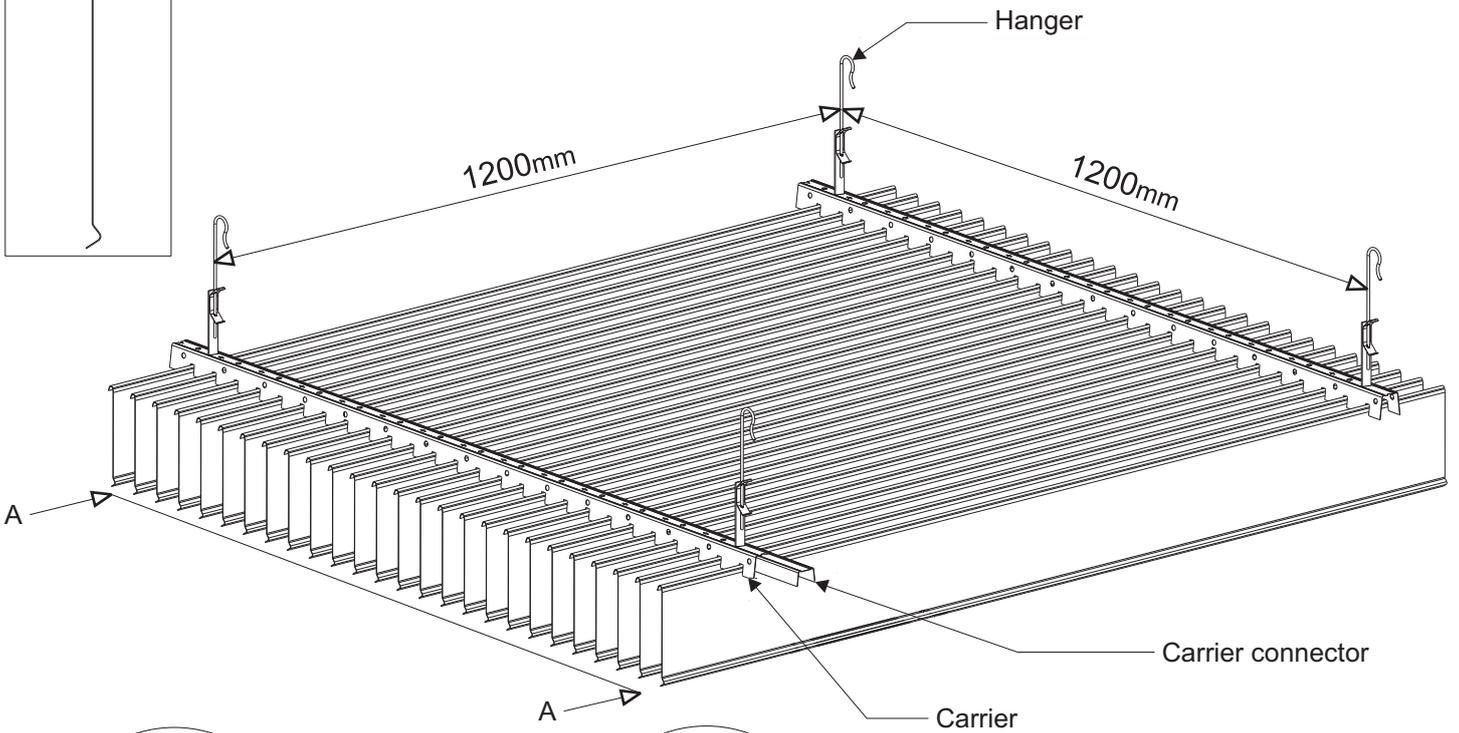


HANGER DETAIL OPTION 1:
PLAIN WIRE

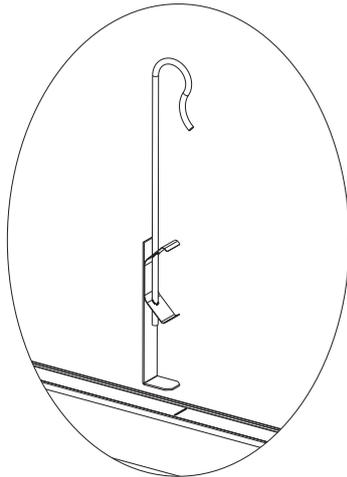

HANGER DETAIL OPTION 2 :
SLOT-IN HANGER WITH
SPRING CLIP

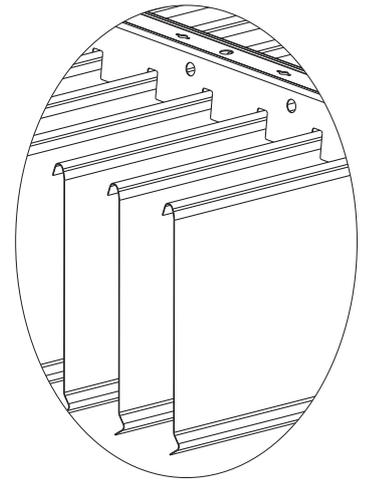

ASSEMBLY DETAIL

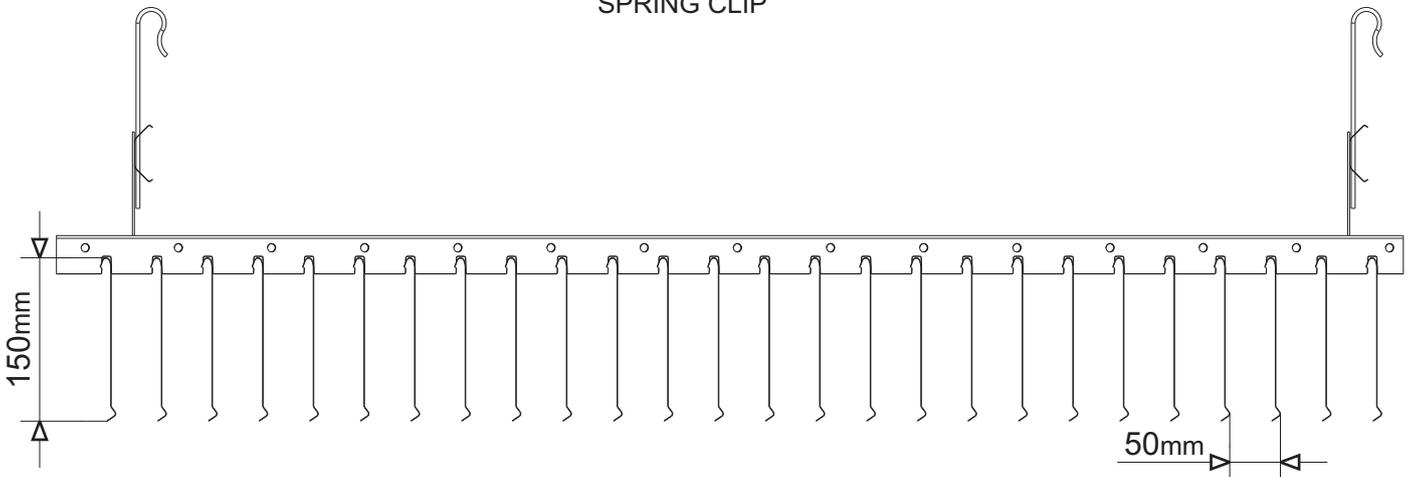

DETAIL A-A

