



C640 (A) 600X600

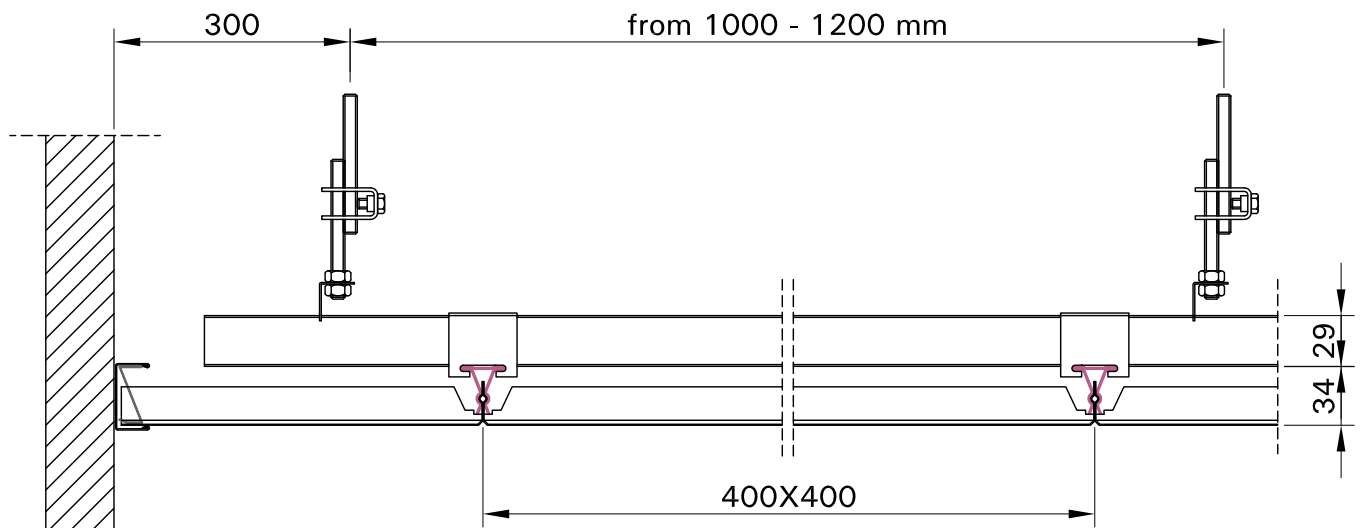











Clip in Tile 400x400 (Bevel Edge)

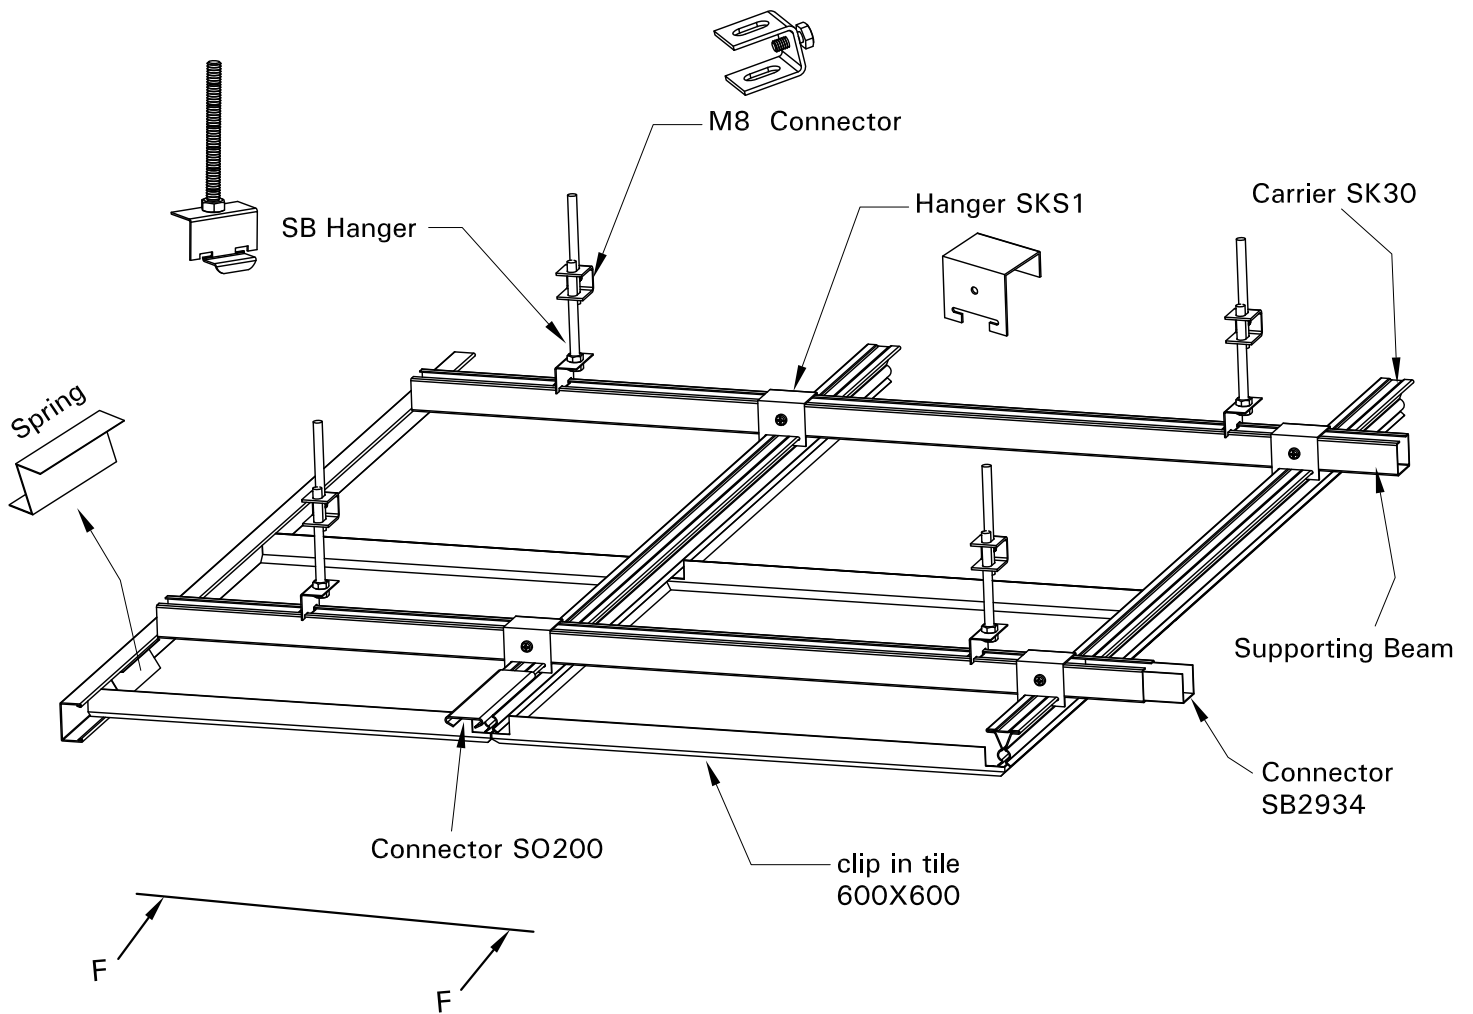

DETAIL " F - F "





Clip in Tile 400x400 (Bevel Edge)

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C440-S	Clip-in Tile 400x400 mm	Fe 0.6 → 5.80	6.25 pcs
				ALu 0.6 → 2.01	
				ALu 0.7 → 2.35	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30	Carrier 4000 mm	Fe 0.68	2.55 Lm
5		SO200	Carrier Connector	Fe 0.0006	0.55 pcs
6		SKS1	Carrier Hanger	Fe 0.037	2.80 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request











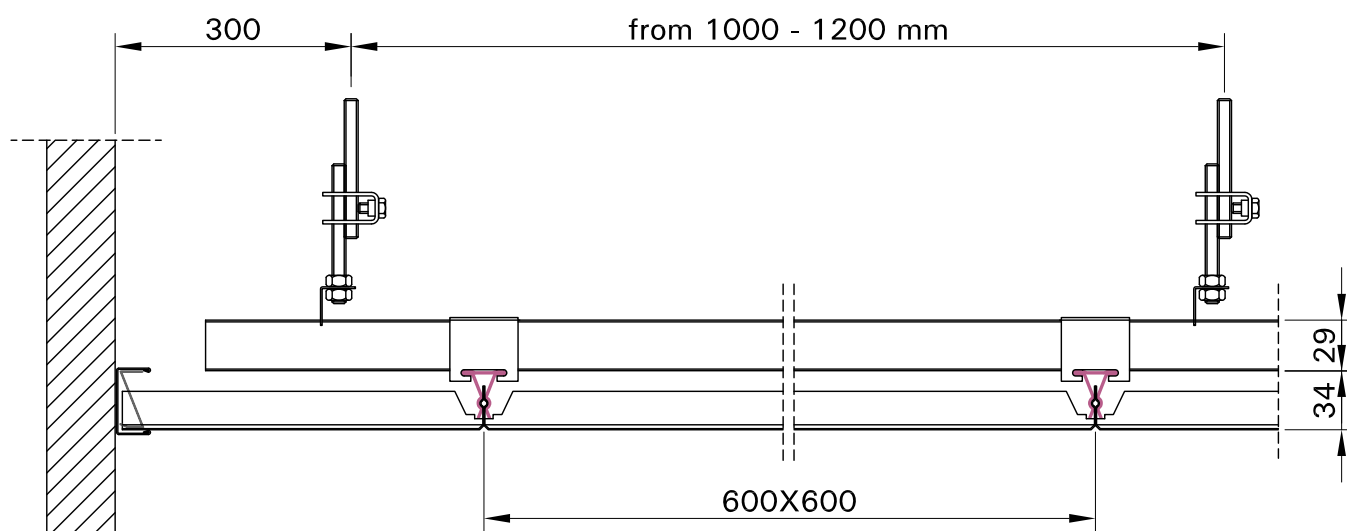
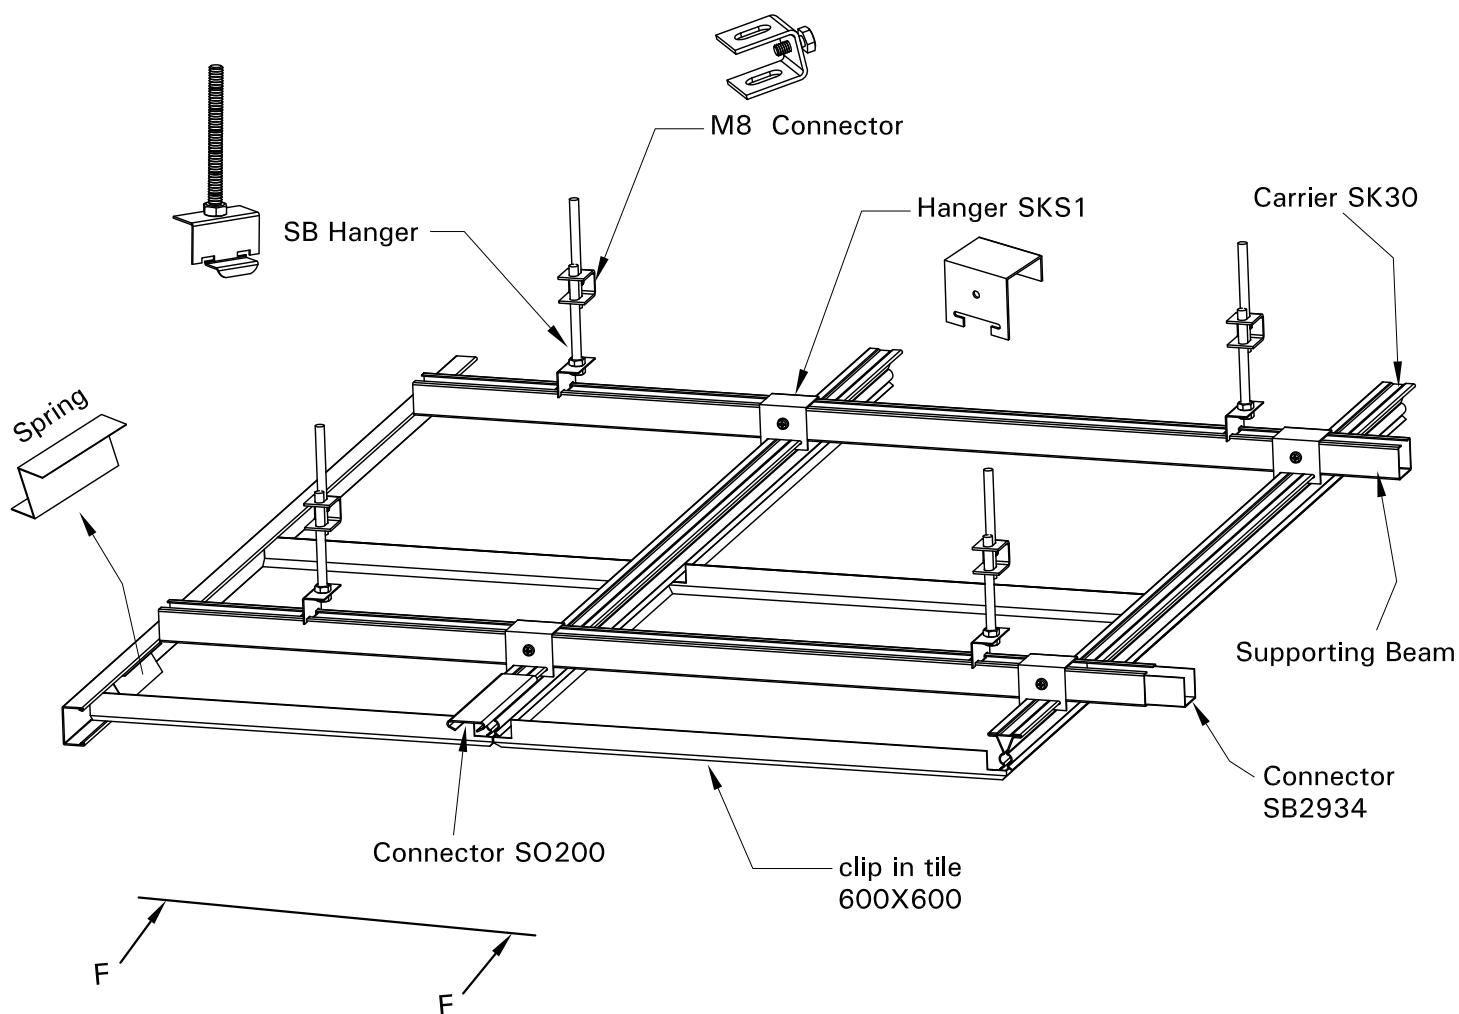
Clip in Tile 600x600 (Bevel Edge)




DETAIL " F - F "





Clip in Tile 600x600 (Bevel Edge)

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C640	Clip-in Tile 600x600 mm	Fe 0.6 → 5.43	2.77 pcs
				ALu 0.6 → 1.90	
				ALu 0.7 → 2.21	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30	Carrier 4000 mm	Fe 0.68	1.70 Lm
5		SO200	Carrier Connector	Fe 0.0006	0.37 pcs
6		SKS1	Carrier Hanger	Fe 0.037	1.90 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request

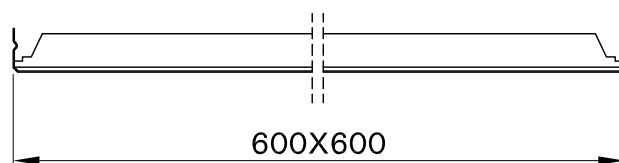







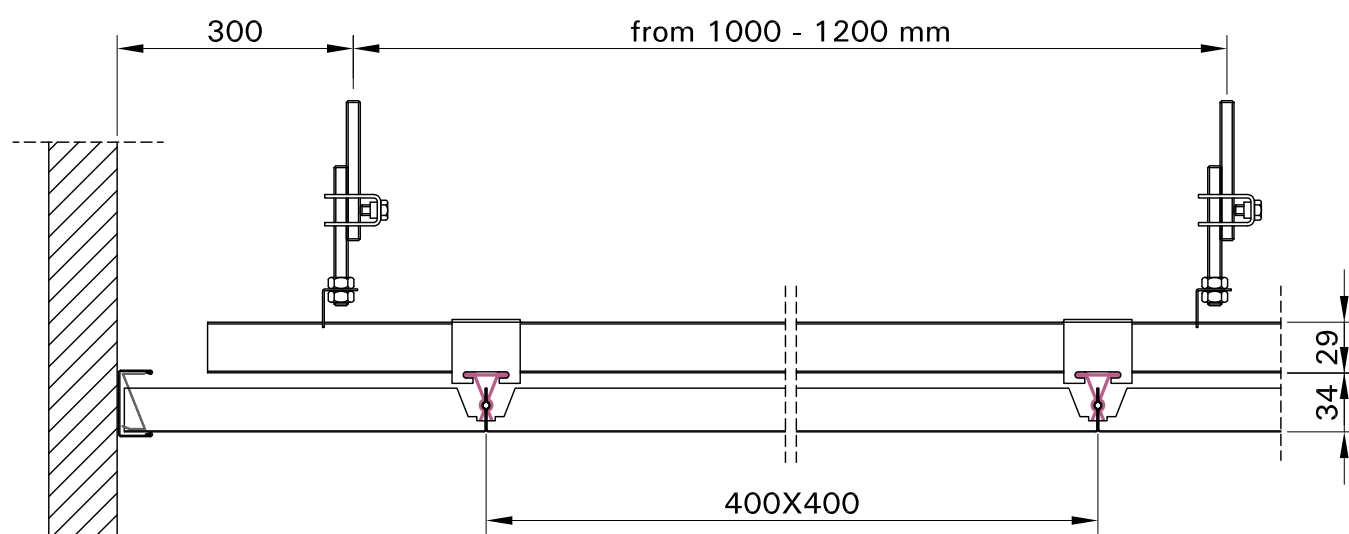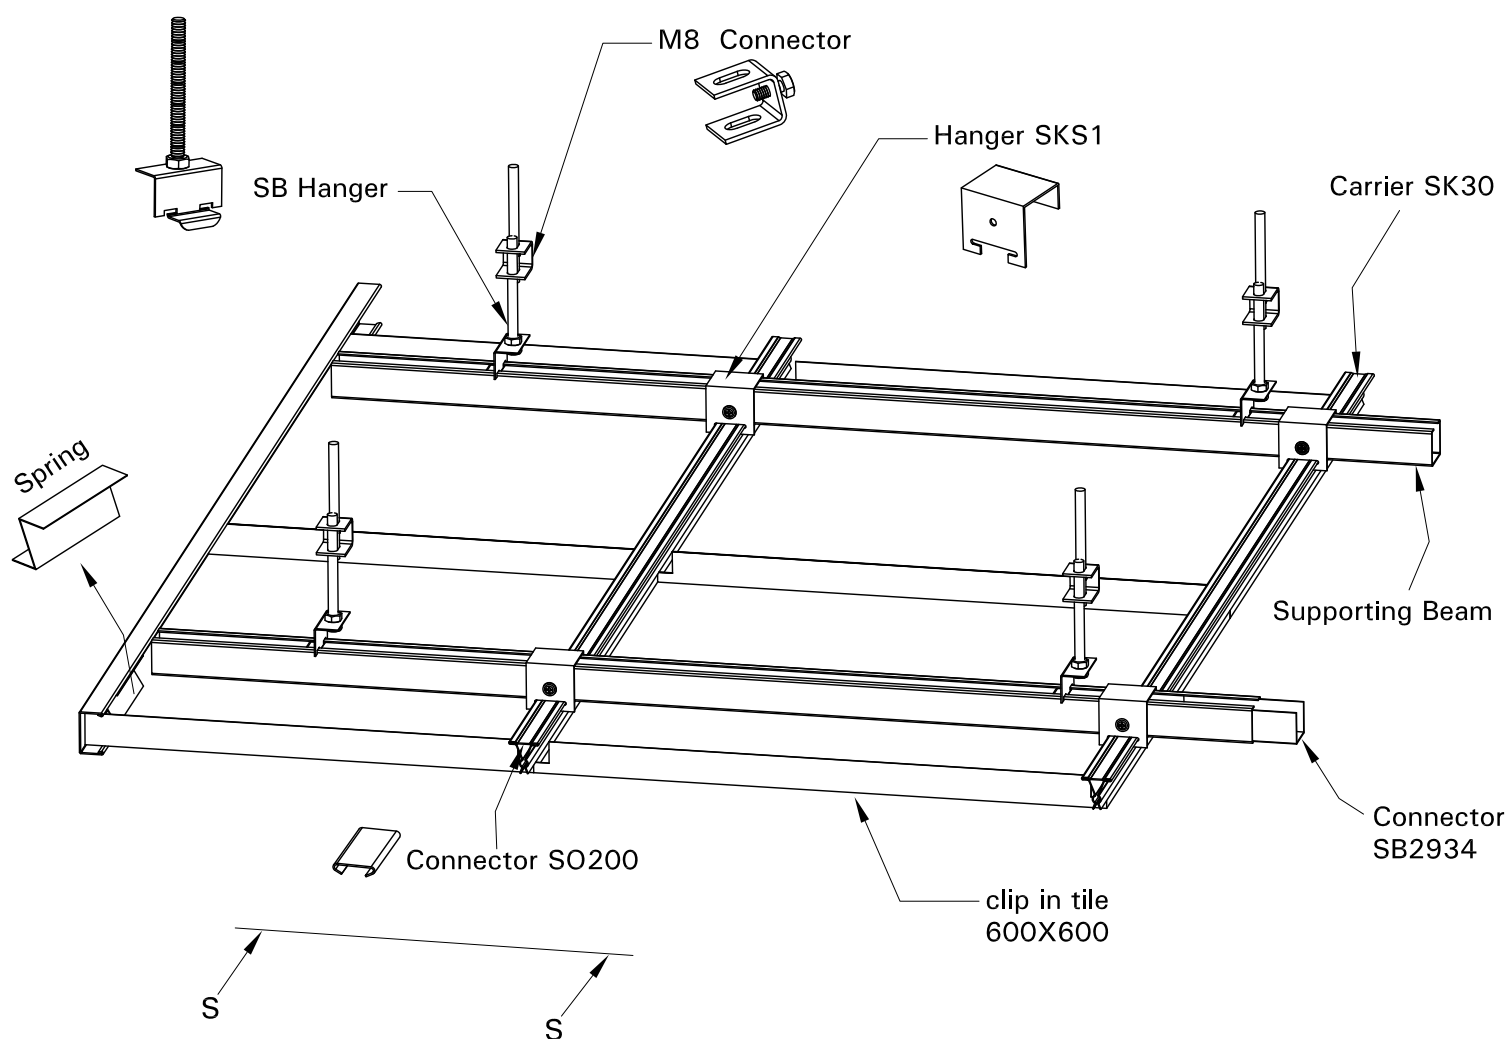




Clip in Tile 400x400 (Square Edge)




DETAIL " S - S "





Clip in Tile 400x400 (Square Edge)

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C440-S	Clip-in Tile 400x400 mm	Fe 0.6 → 5.80	6.25 pcs
				ALu 0.6 → 2.01	
				ALu 0.7 → 2.35	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30	Carrier 4000 mm	Fe 0.68	2.55 Lm
5		SO200	Carrier Connector	Fe 0.0006	0.55 pcs
6		SKS1	Carrier Hanger	Fe 0.037	2.80 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request
11		FE	Fix End	Fe 0.049 kg / pcs	upon request









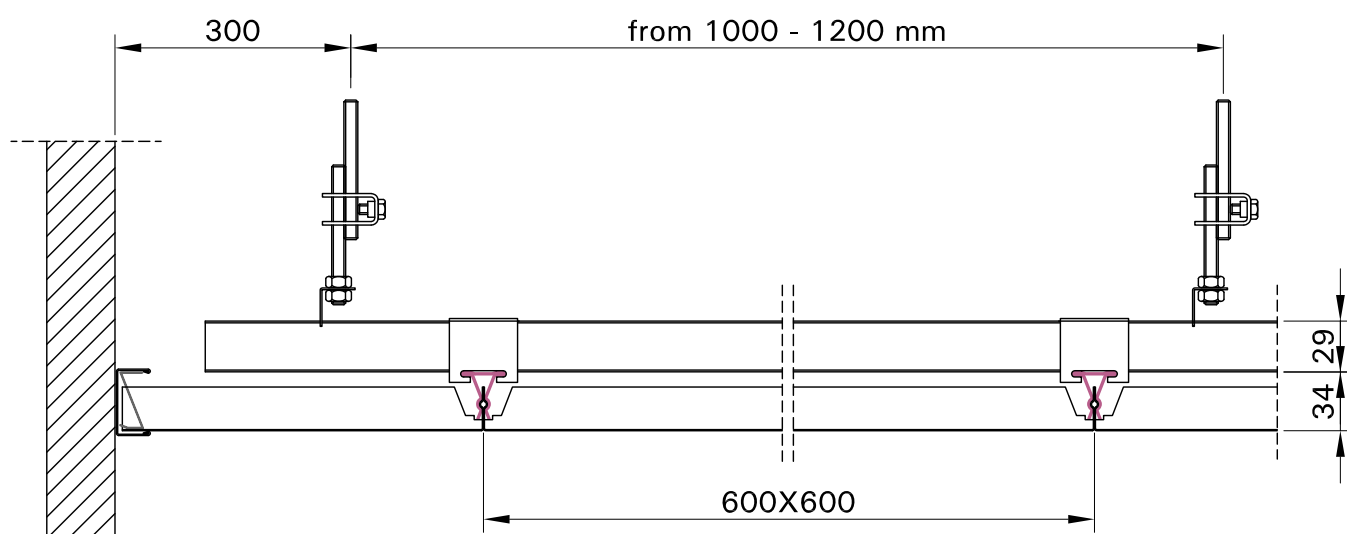
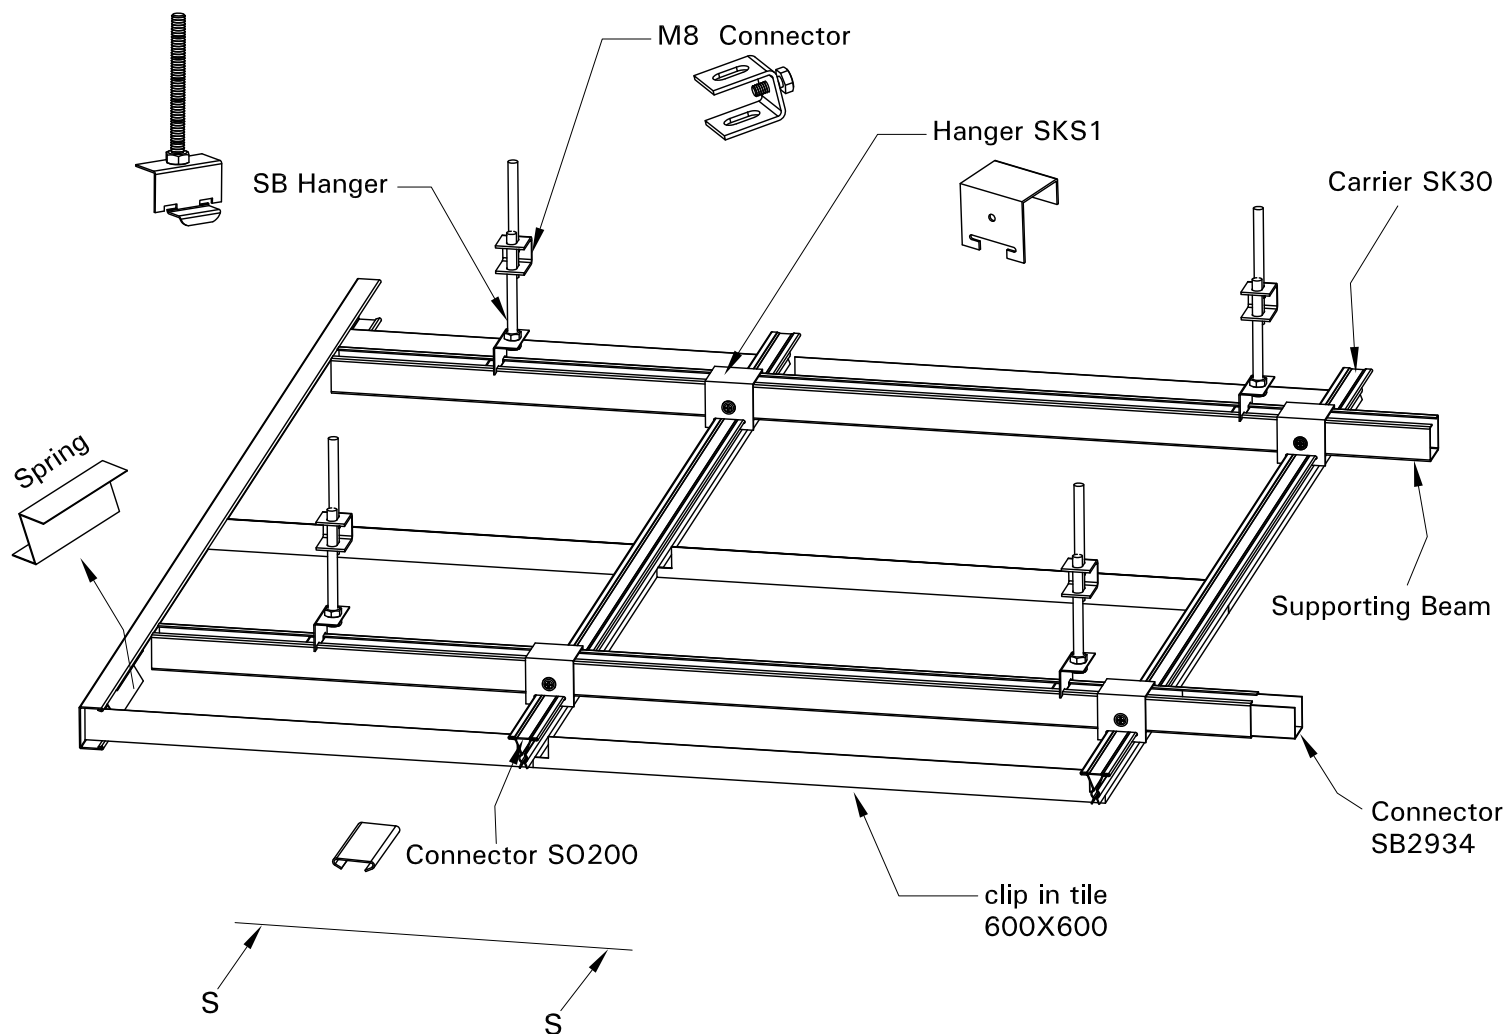



Clip in Tile 600x600 (Square Edge)





DETAIL " S - S "

Clip in Tile 600x600 (Square Edge)

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C640-S	Clip-in Tile 600x600 mm	Fe 0.6 → 5.43	2.77 pcs
				ALu 0.6 → 1.90	
				ALu 0.7 → 2.21	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30	Carrier 4000 mm	Fe 0.68	1.70 Lm
5		SO200	Carrier Connector	Fe 0.0006	0.37 pcs
6		SKS1	Carrier Hanger	Fe 0.037	1.90 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request












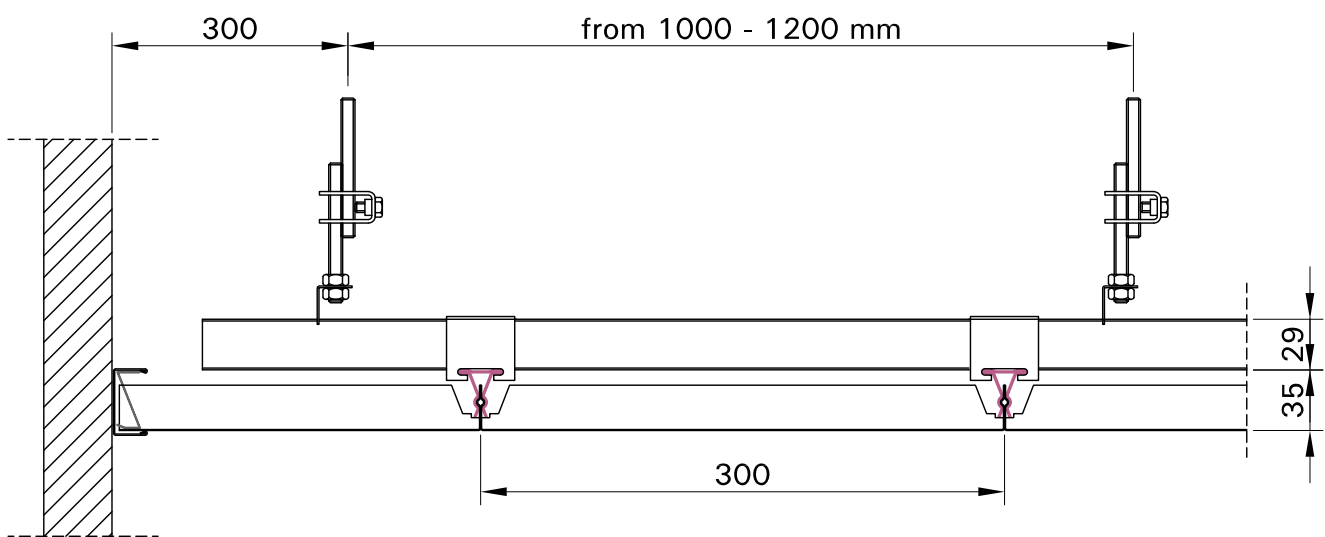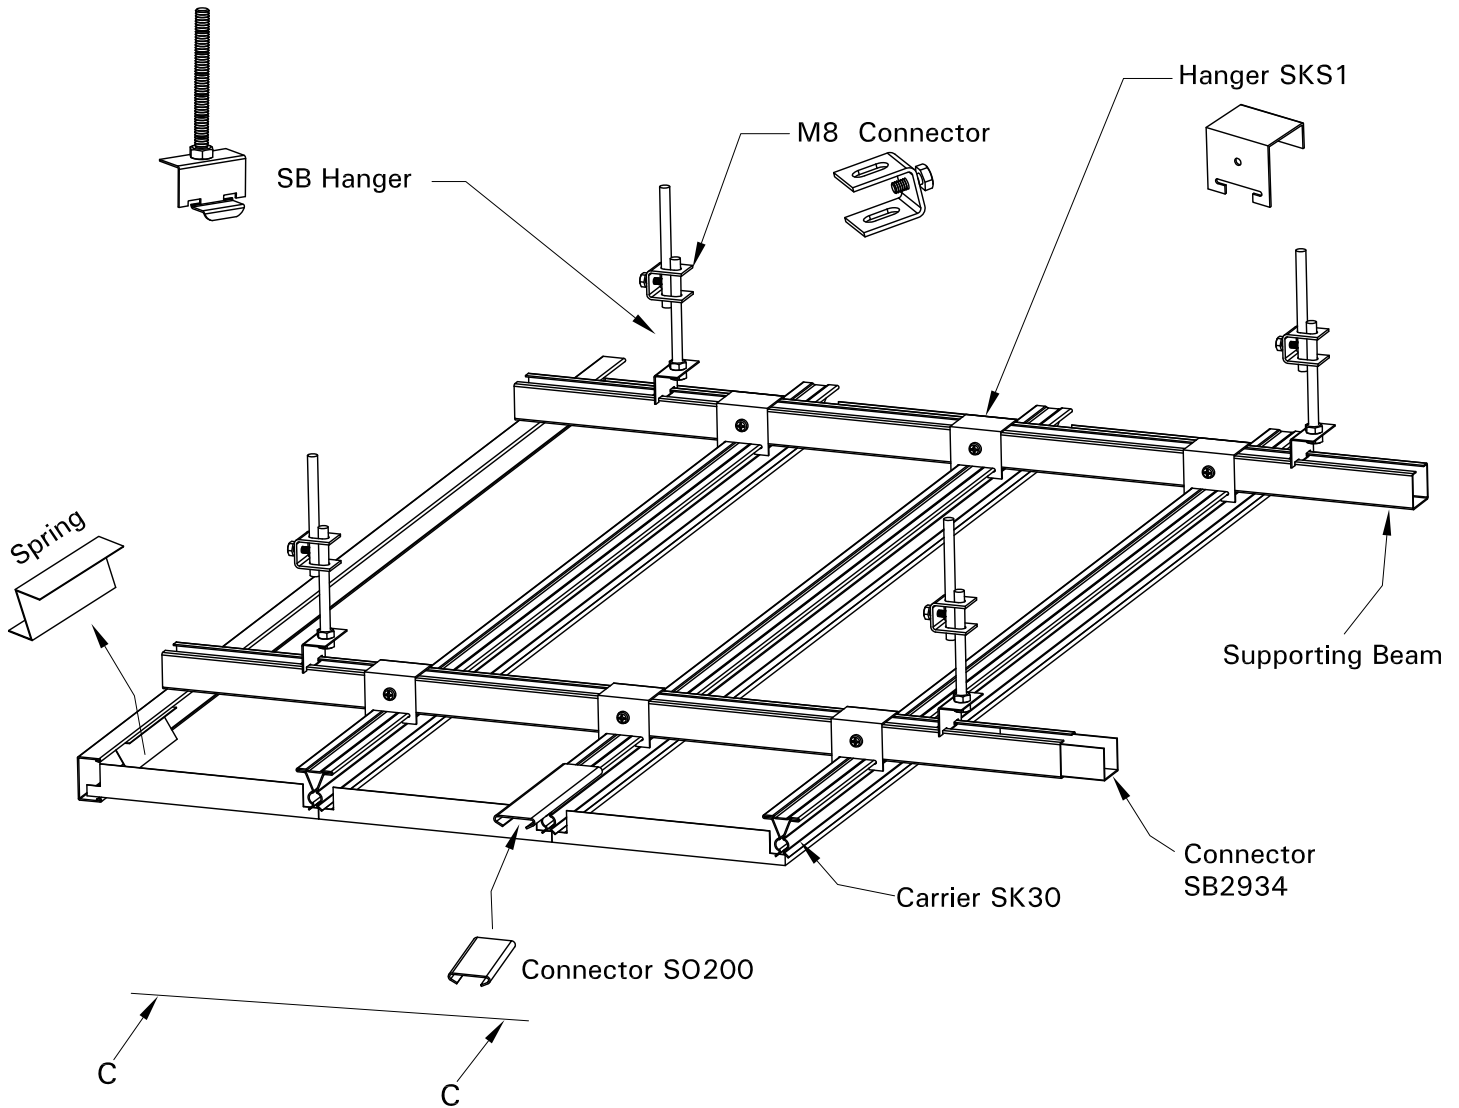
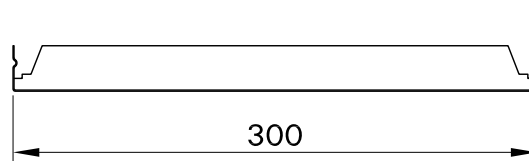
Clip in Tile C300 x 3000 Max





DETAIL " C- C "

Clip in Tile C300 x 3000 Max

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C340-S	Clip-in Tile 300x3000 mm	Fe 0.6 → 5.60	2.77 pcs
				ALu 0.6 → 1.95	
				ALu 0.7 → 2.27	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30	Carrier 4000 mm	Fe 0.68	3.35 Lm
5		SO200	Carrier Connector	Fe 0.0006	0.37 pcs
6		SKS1	Carrier Hanger	Fe 0.037	1.90 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request










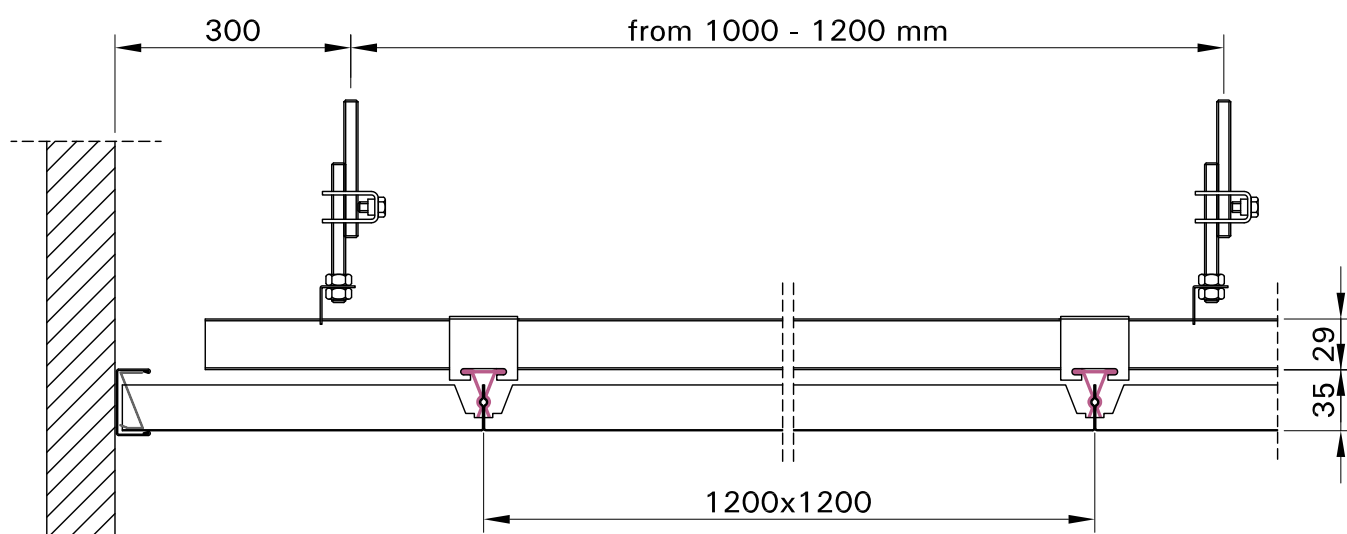
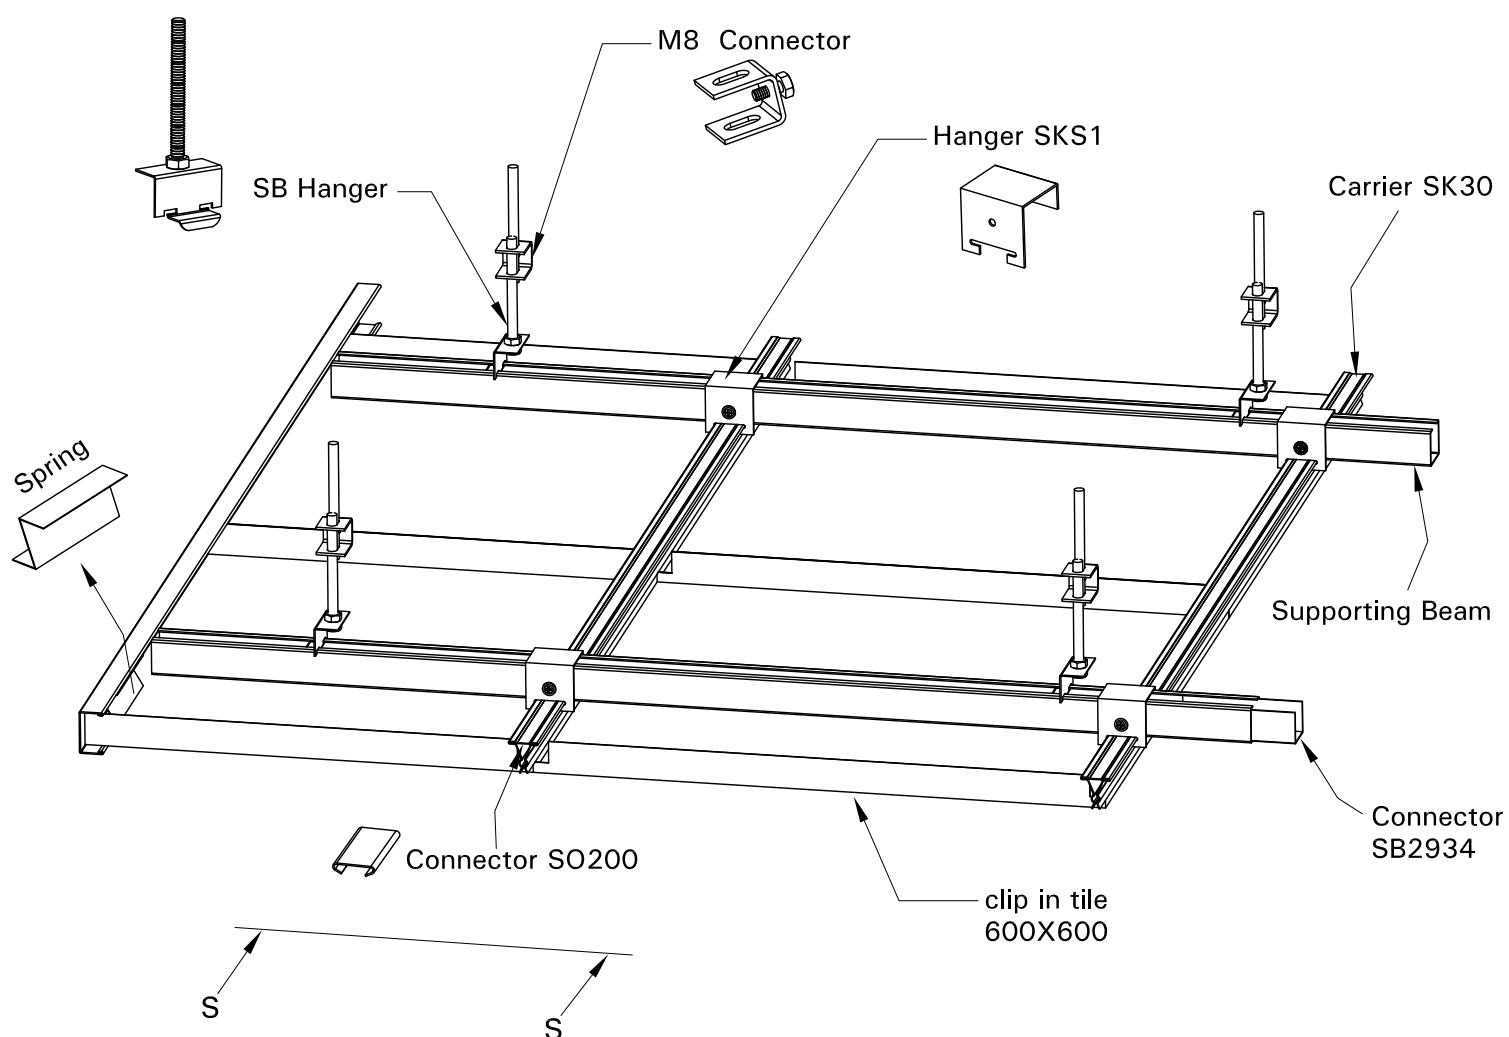

Clip in Tile 1200x1200 (Square Edge)




DETAIL " S - S "



Clip in Tile 1200x1200 (Square Edge)



No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C1200-S	Clip-in Tile 1200x1200 mm	Fe 1 mm → 8.68	0.694 pcs
				ALu 1 mm → 3.0	
				ALu 1.2 mm → 3.6	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30	Carrier 4000 mm	Fe 0.68	0.85 Lm
5		SO200	Carrier Connector	Fe 0.0006	0.20 pcs
6		SKS1	Carrier Hanger	Fe 0.037	1 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request

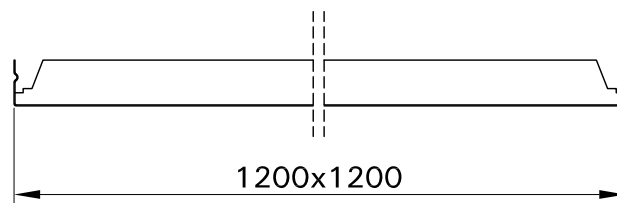

C640 (GAP)














Clip in Tile 600x600 (Gap with Bevel Edge)

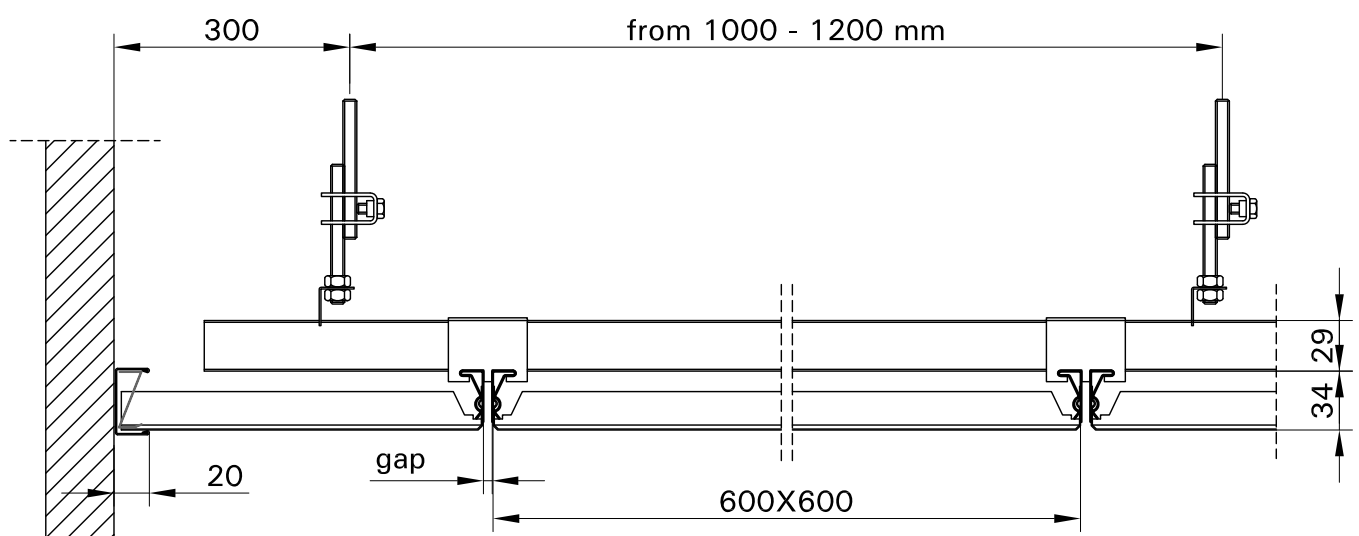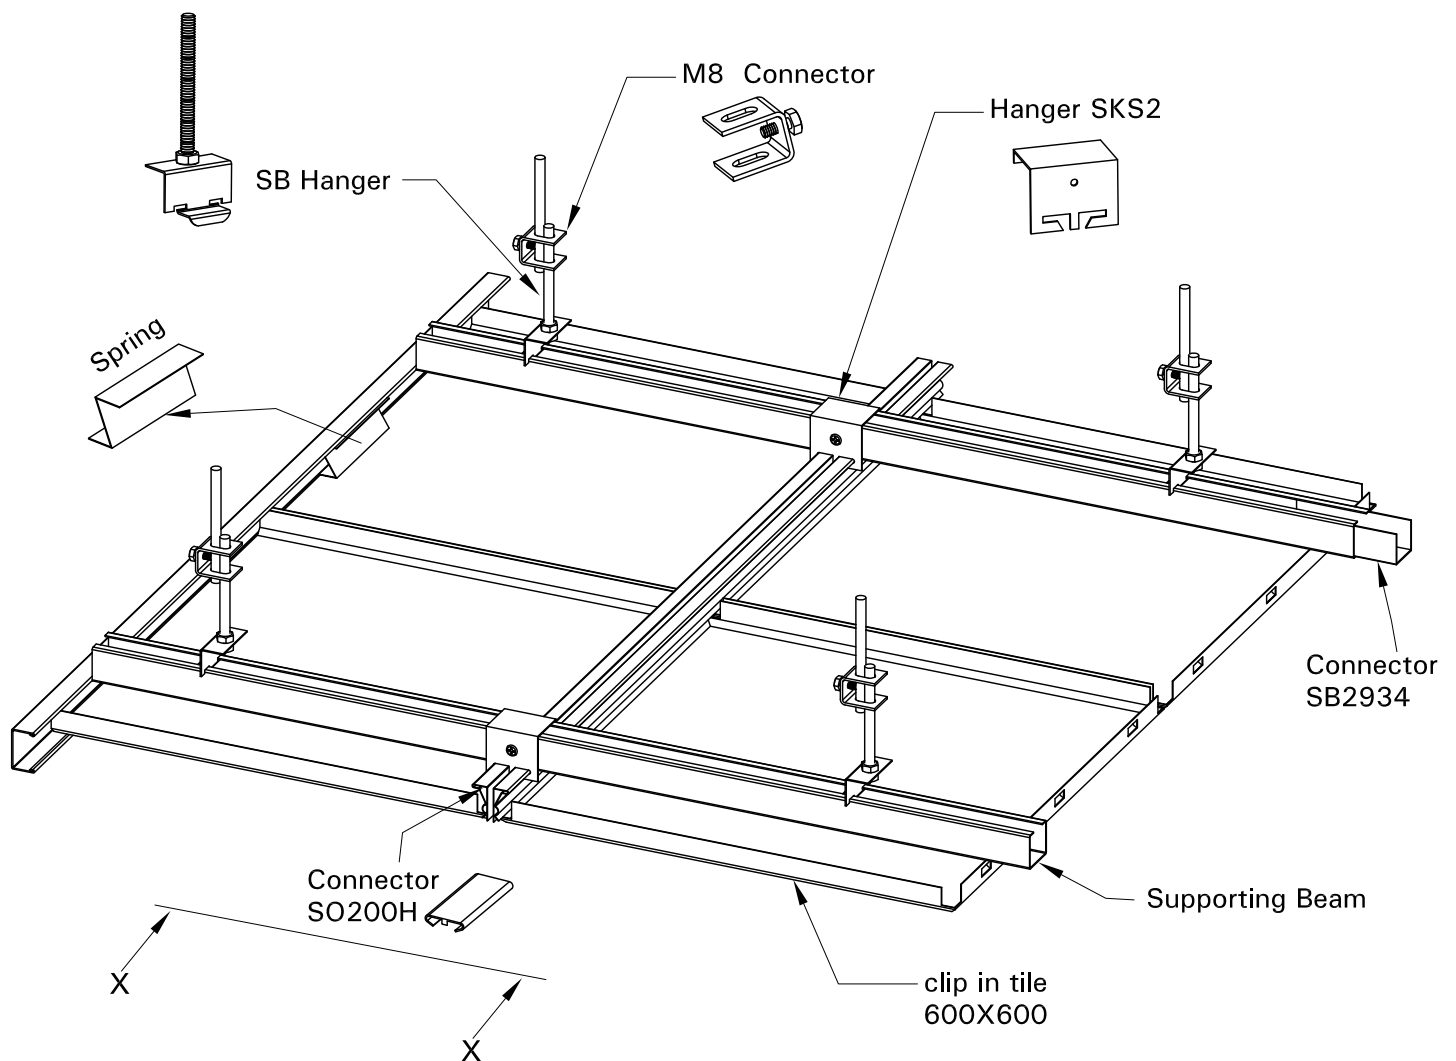



DETAIL " X - X "

Clip in Tile 600x600 (Gap with Bevel Edge)

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C640	Clip-in Tile 600x600 mm	Fe 0.6 → 5.73	2.77 pcs
				ALu 0.6 → 1.98	
				ALu 0.7 → 2.31	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30H	Carrier 4000 mm	Fe 1.36	3.40 Lm
5		SO200H	Carrier Connector	Fe 0.0012	0.74 pcs
6		SKS2	Carrier Hanger	Fe 0.076	1.90 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request
11		FE	Fix End	Fe 0.049 kg / pcs	upon request




Clip in Tile 600x600 (Air Gap + Closed Gap)

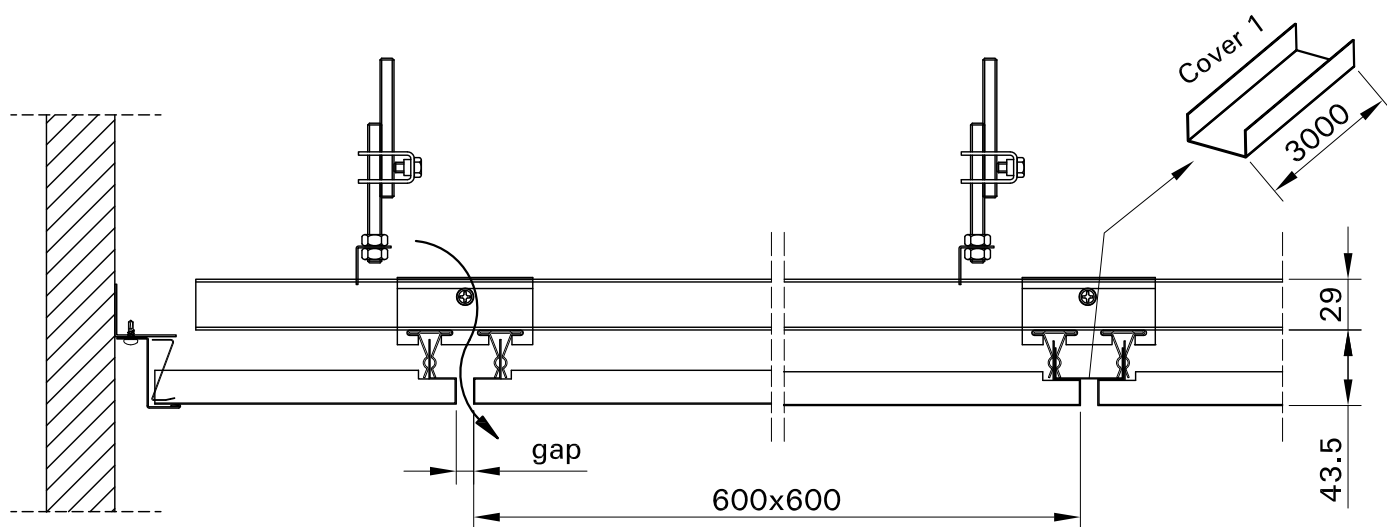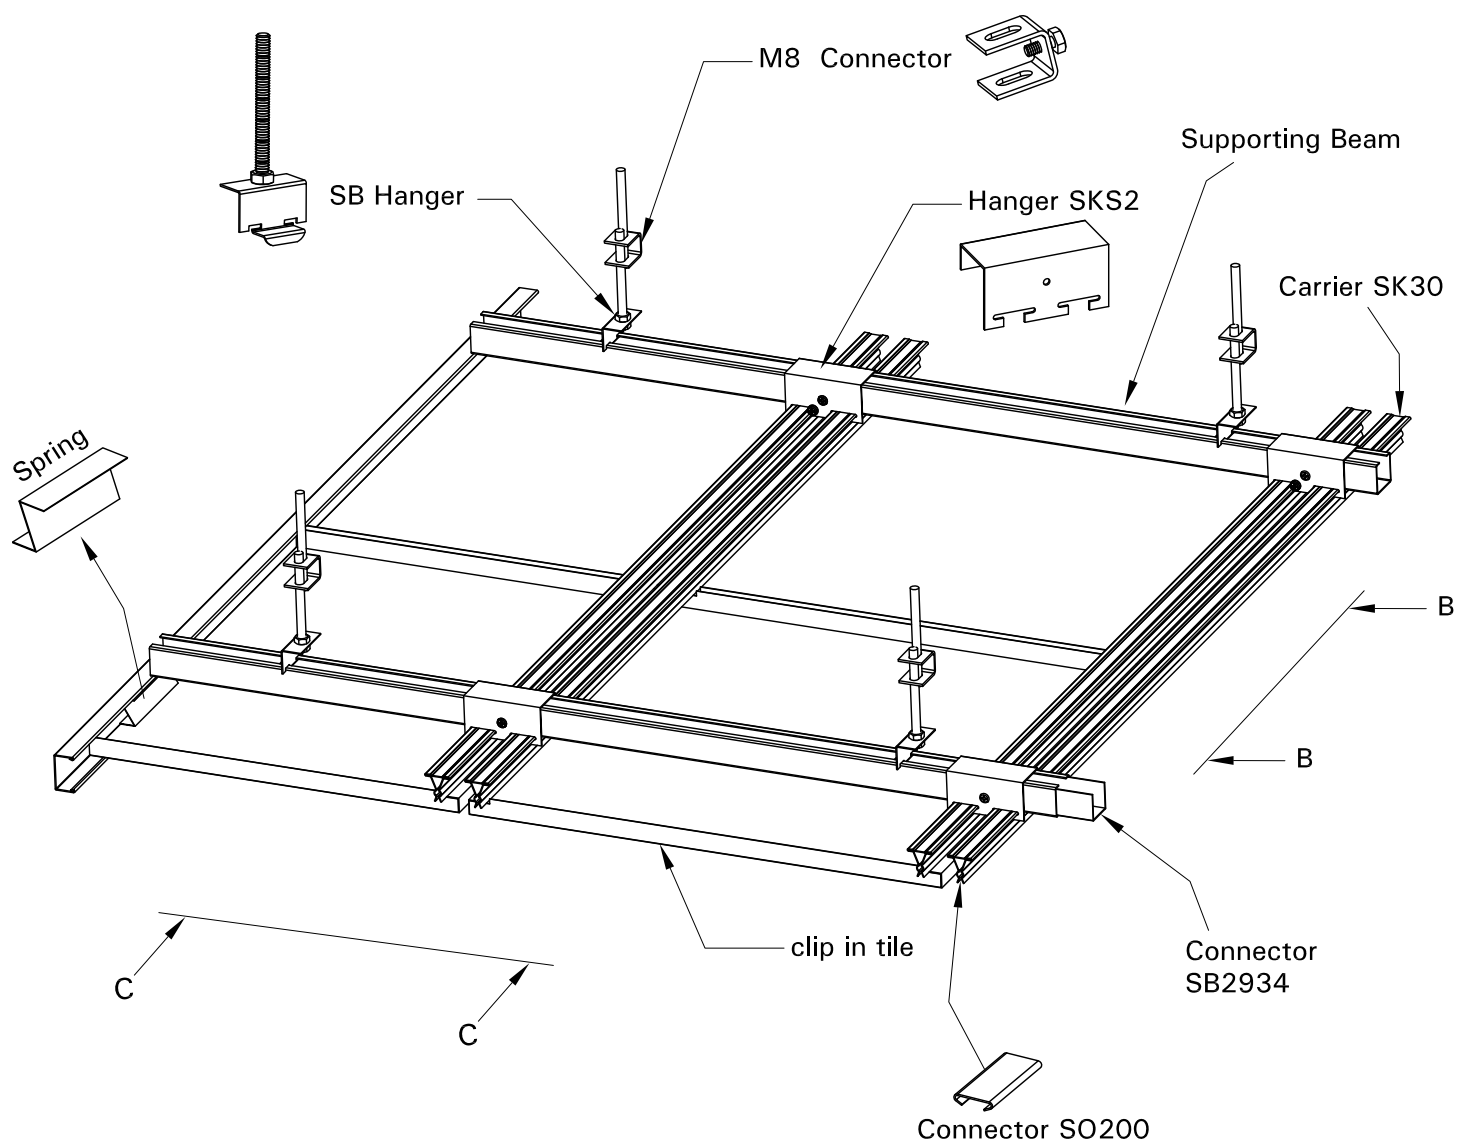

DETAIL " C - C "


Clip in Tile 600x600 (Air Gap + Closed Gap)

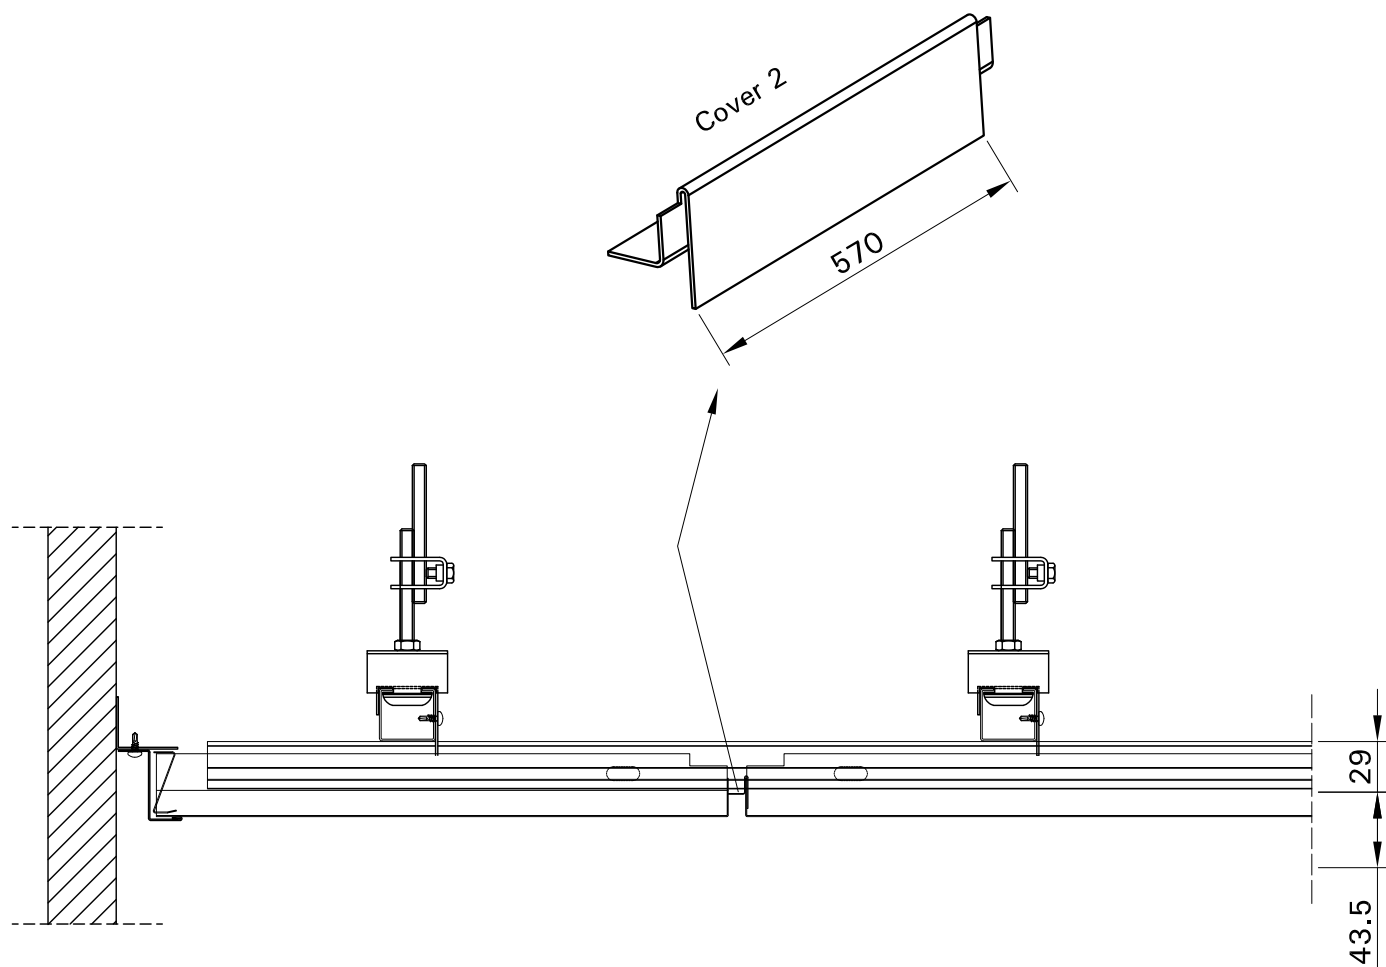











DETAIL " B- B"




Clip in Tile 500x500 U - Gap

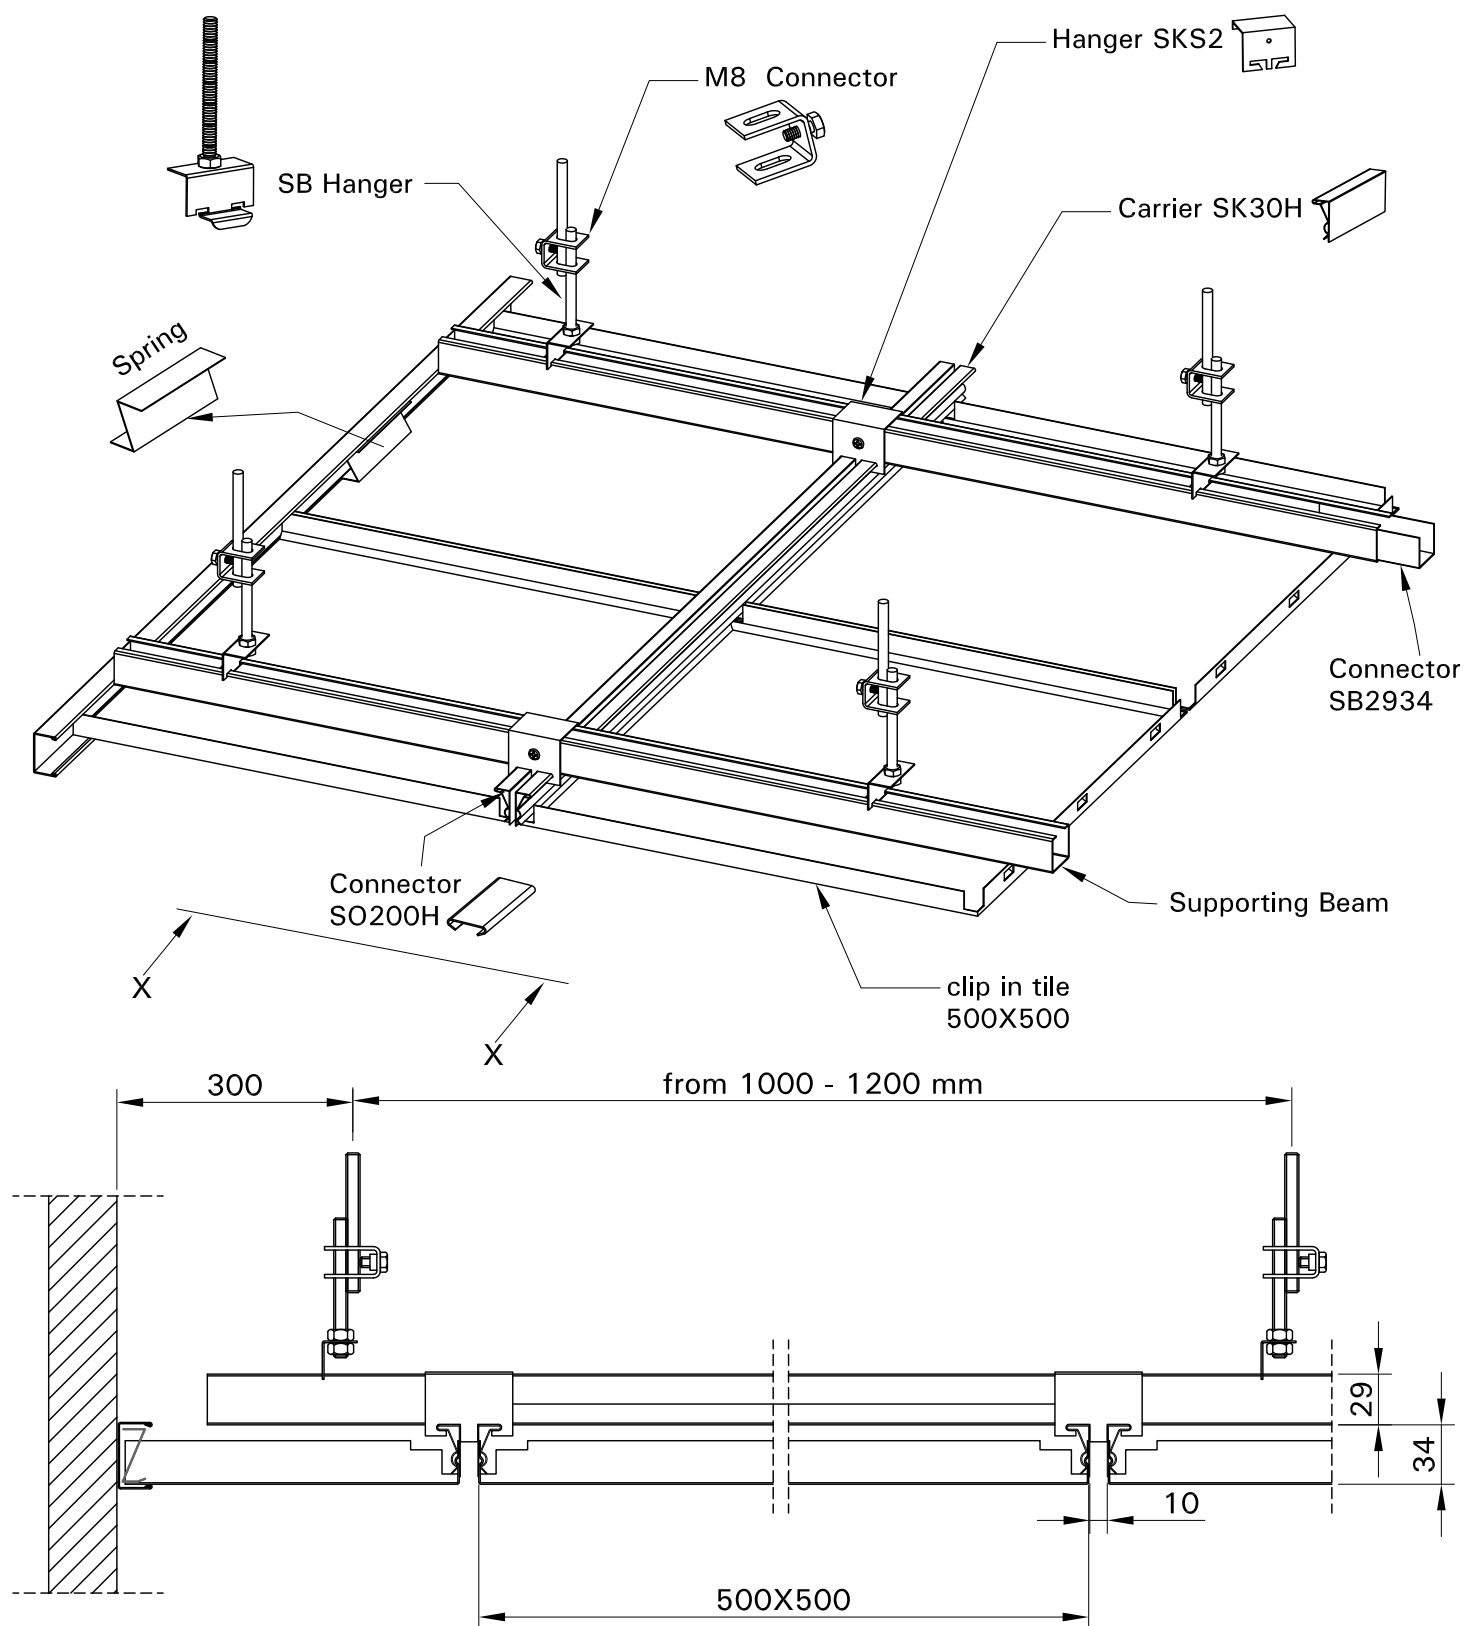


Clip in Tile 500x500 U - Gap

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C540-U	Clip-in Tile 500x500 mm	Fe 0.6 → 5.85	4 pcs
				ALu 0.6 → 2.10	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30H	Carrier 4000 mm	Fe 1.36	4.1 Lm
5		SO200H	Carrier Connector	Fe 0.0012	0.9 pcs
6		SKS2	Carrier Hanger	Fe 0.076	2.35 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request

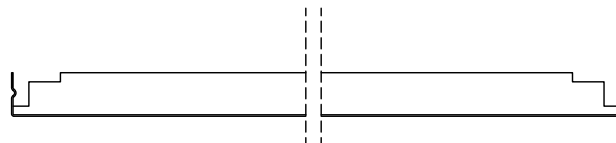











Clip in Tile 600x600 U - Gap

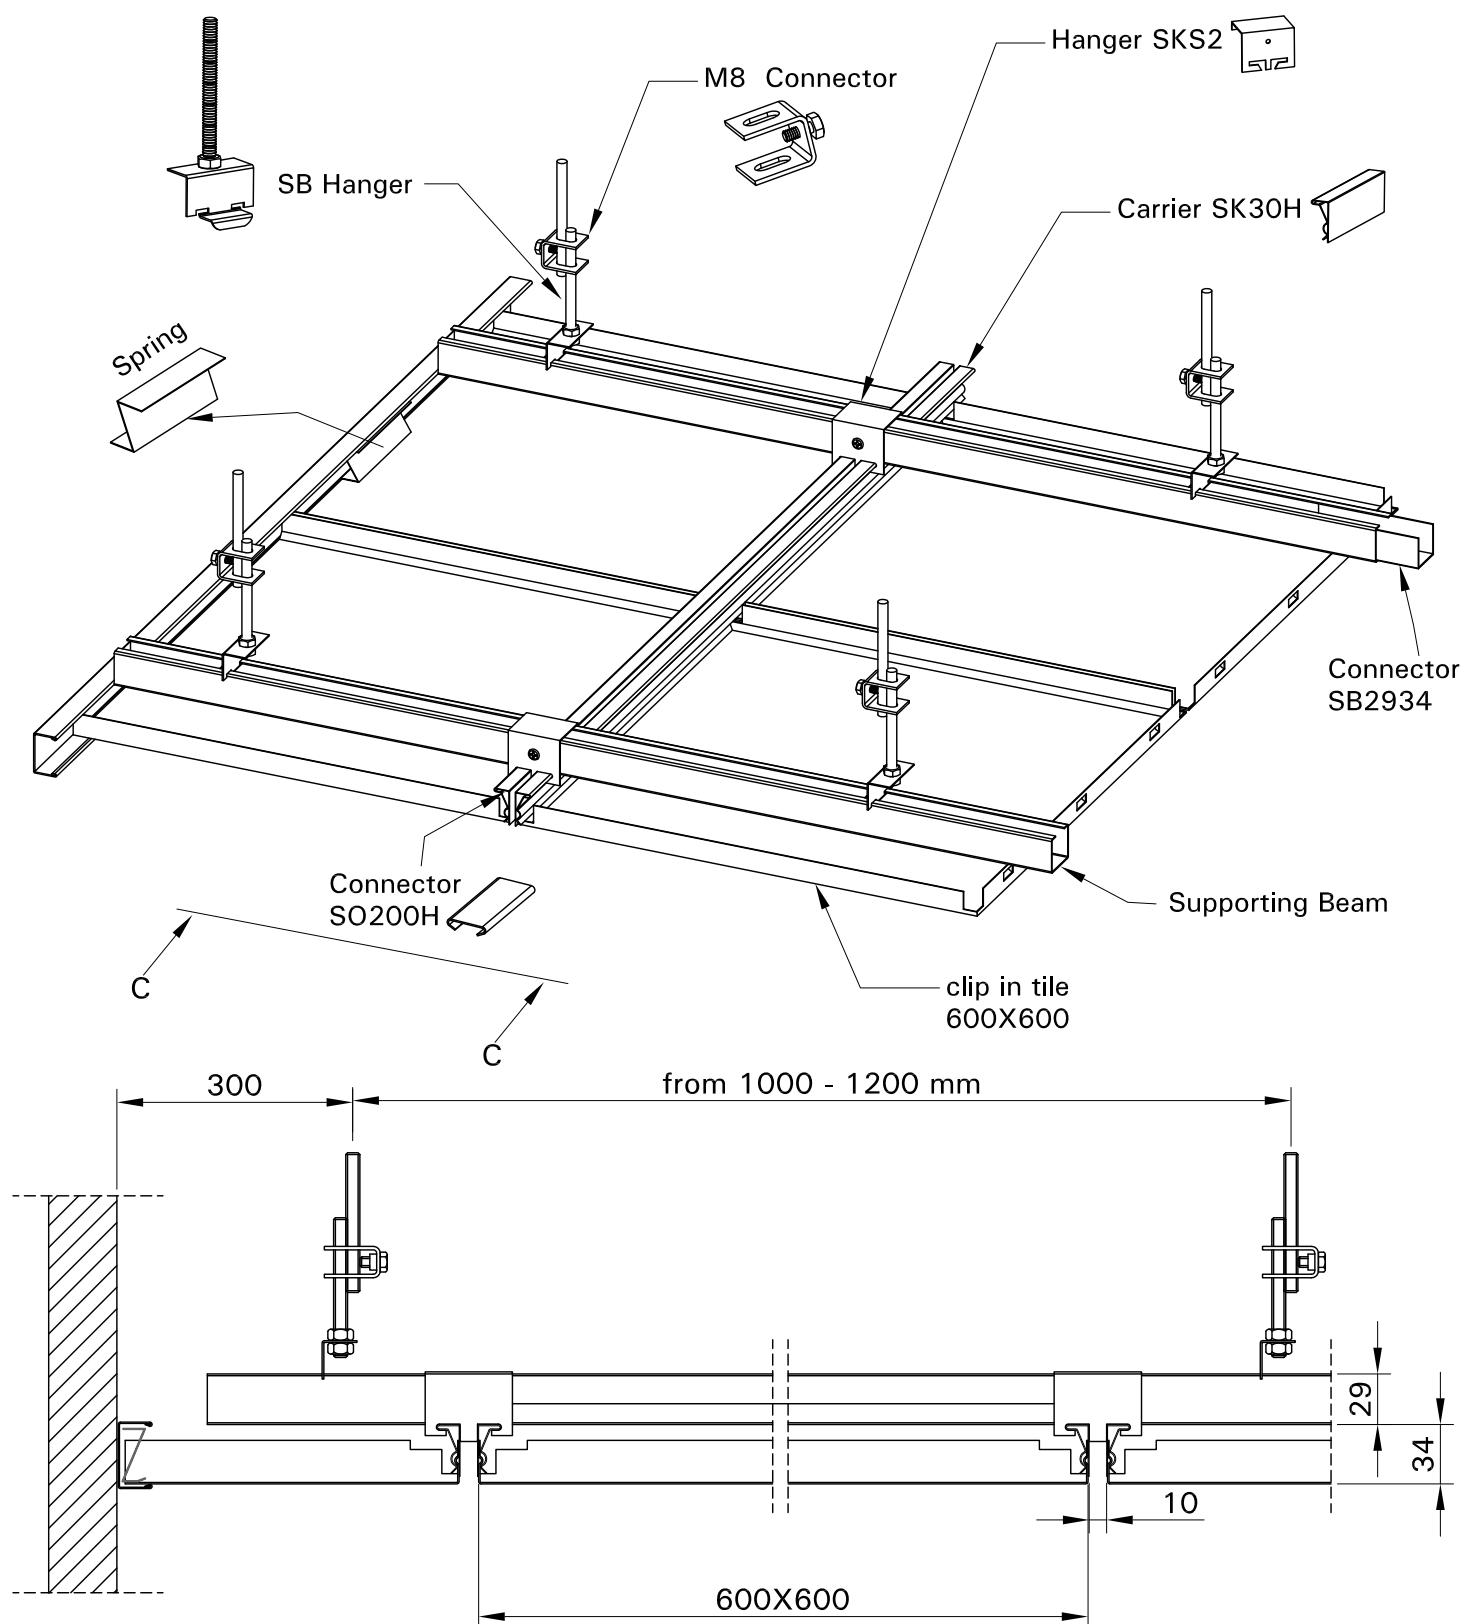


DETAIL " X - X "





Clip in Tile 600x600 U - Gap

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C640-U	Clip-in Tile 600x600 mm	Fe 0.6 → 5.73	2.77 pcs
				ALu 0.6 → 1.98	
				ALu 0.7 → 2.31	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30H	Carrier 4000 mm	Fe 1.36	3.40 Lm
5		SO200H	Carrier Connector	Fe 0.0012	0.74 pcs
6		SKS2	Carrier Hanger	Fe 0.076	1.90 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request

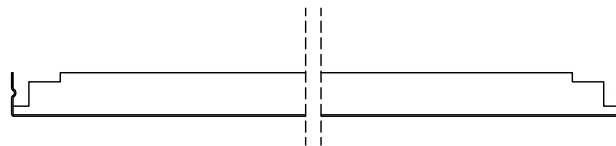












Clip in Tile 600x600 G - Gap

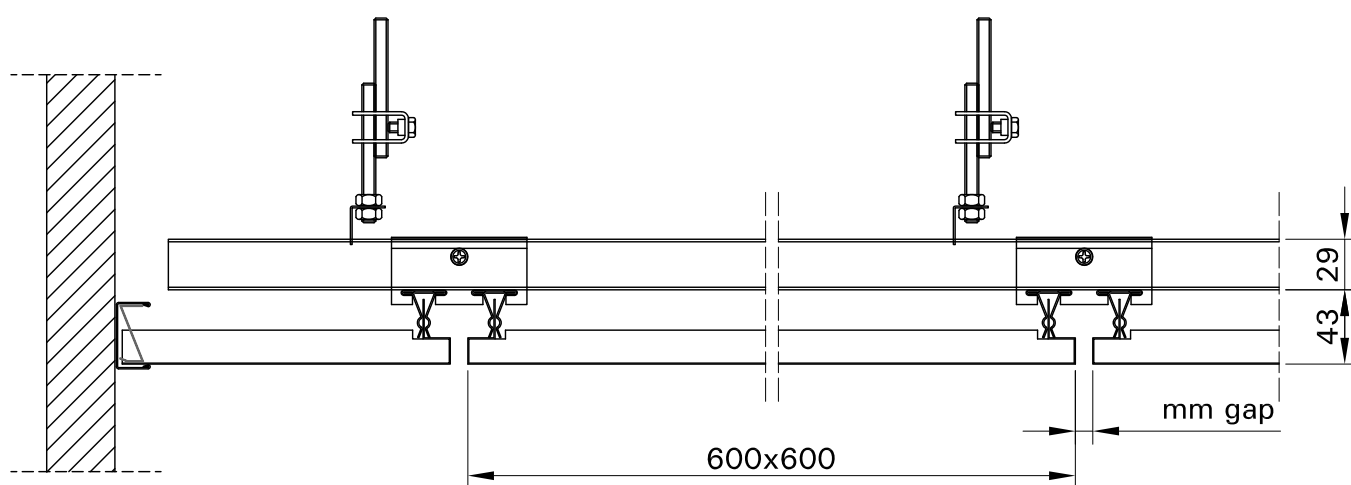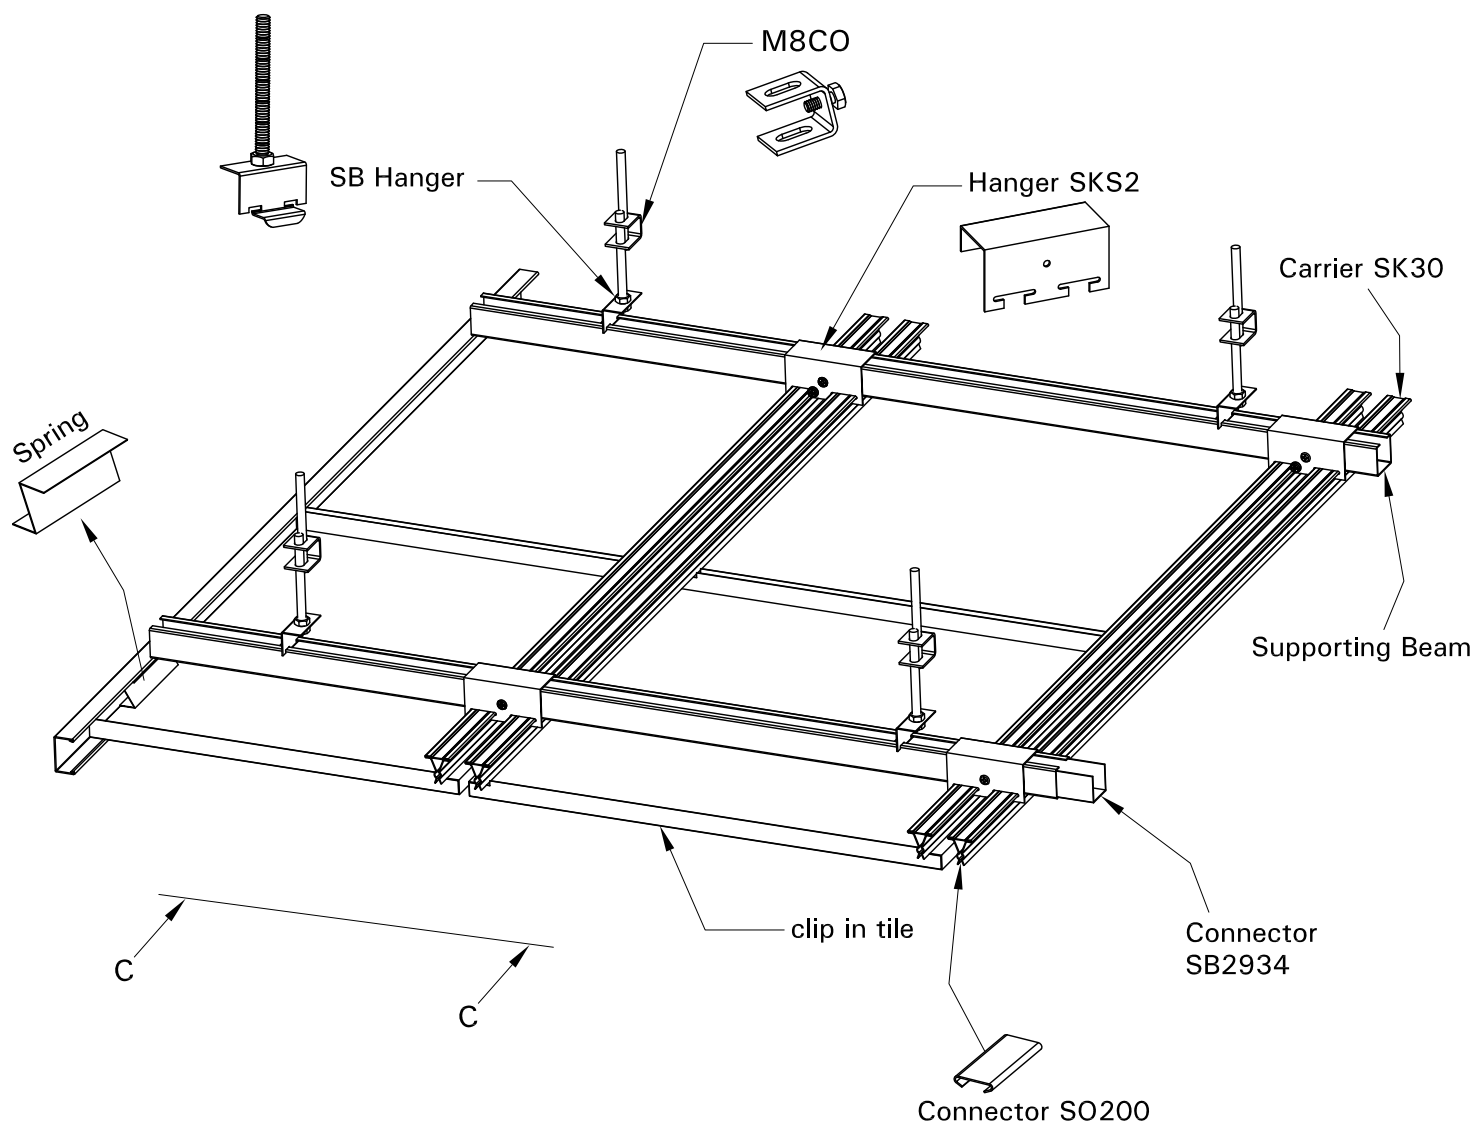



DETAIL " C - C "

Clip in Tile 600x600 G - Gap

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C640-G	Clip-in Tile 600x600 mm	Fe 0.6 → 5.73	2.77 pcs
				ALu 0.6 → 1.98	
				ALu 0.7 → 2.31	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30	Carrier 4000 mm	Fe 1.36	3.40 Lm
5		SO200	Carrier Connector	Fe 0.0012	0.74 pcs
6		SKS2	Carrier Hanger	Fe 0.076	1.90 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request

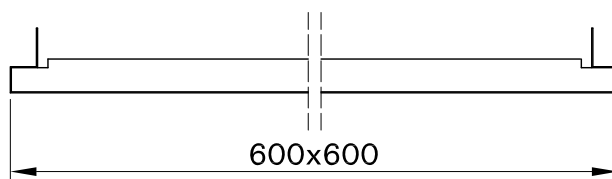












Clip in Tile 1200x1200 - Gap

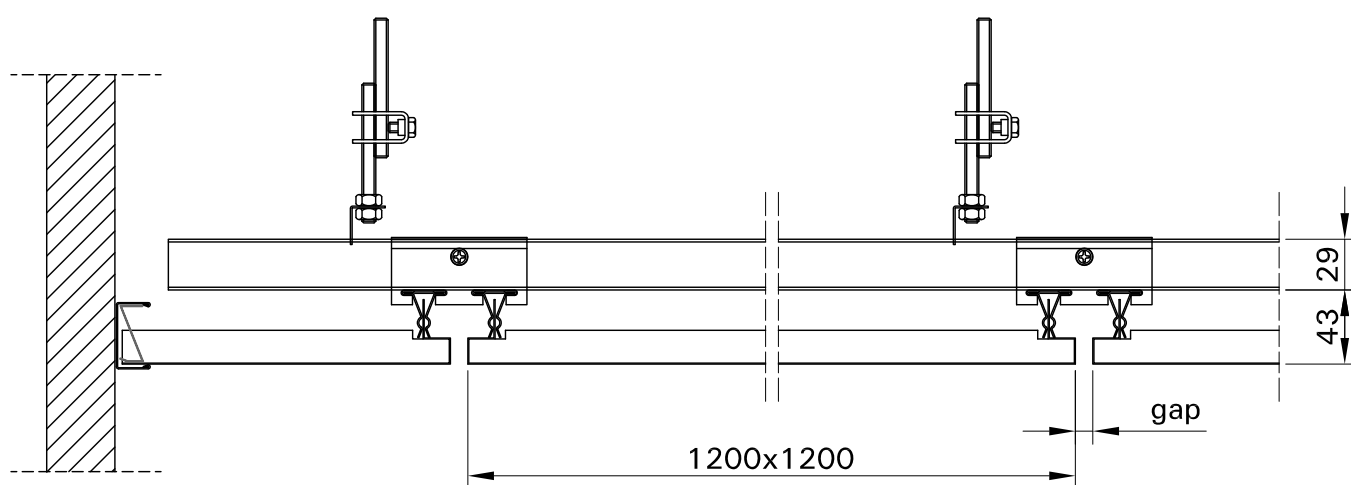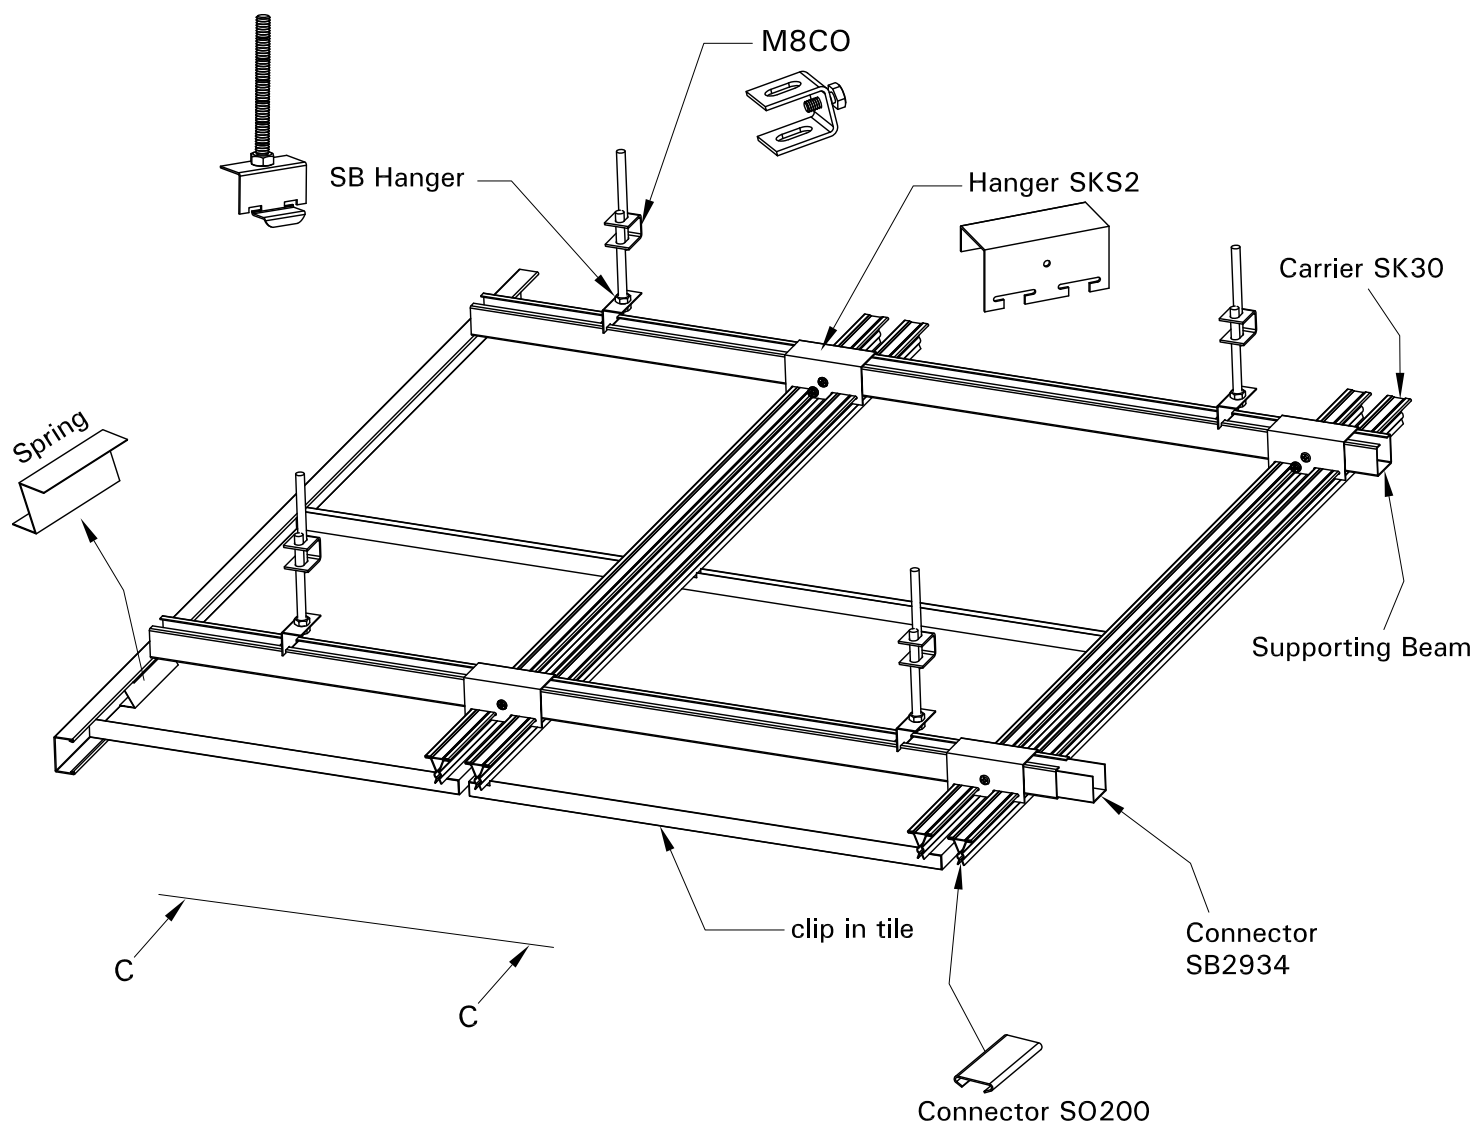

DETAIL " C - C "


Clip in Tile 1200x1200 - Gap

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		C1200-G	Clip-in Tile 1200x1200 mm	Fe 1 mm → 8.68	0.694 pcs
				ALu 1 mm → 3.0	
				ALu 1.2 mm → 3.6	
2		SB2934	Supporting Beam	Fe 0.796	1 Lm
3		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
4		SK30	Carrier 4000 mm	Fe 0.68	1.70 Lm
5		SO200	Carrier Connector	Fe 0.0006	0.40 pcs
6		SKS1	Carrier Hanger	Fe 0.037	1 pcs
7		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
8		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
9		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
10		TS70	Spring Z	ALu 0.017 kg / pcs	upon request

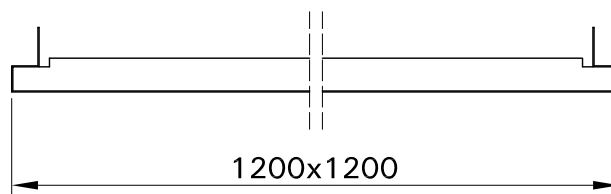


Clip in Accessories


Carrier Hanger

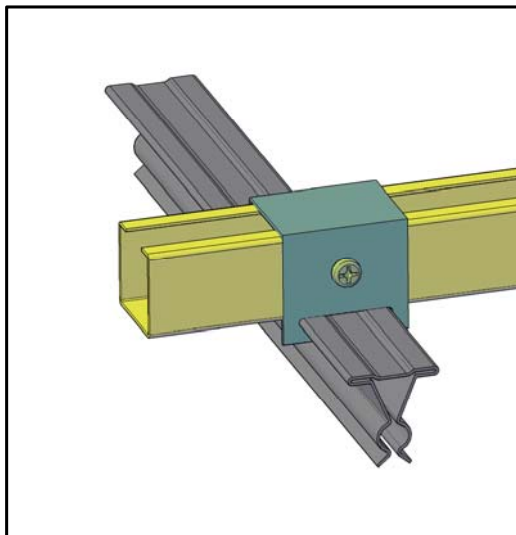


Threaded Stud Connector M8

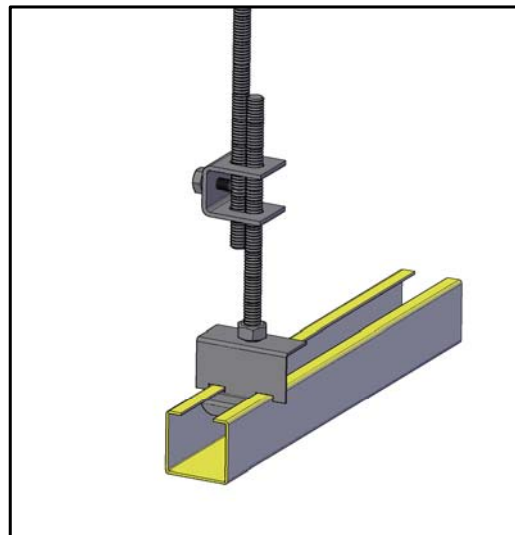

Spring


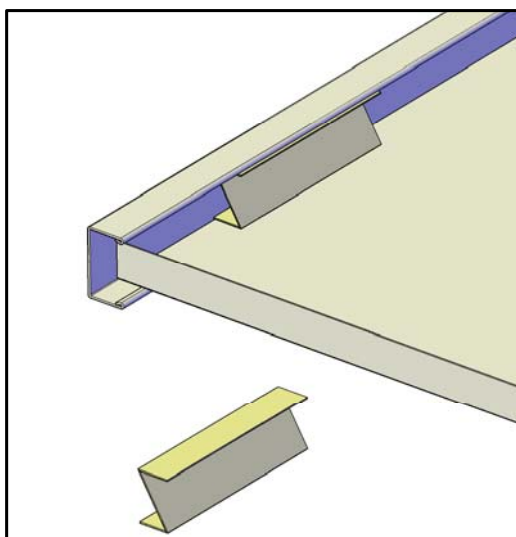


Extractor Tool Clip in

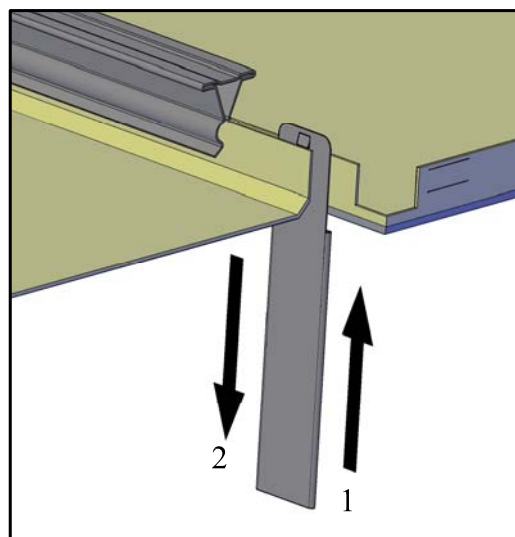





CLIP IN INSPECTION HATCH

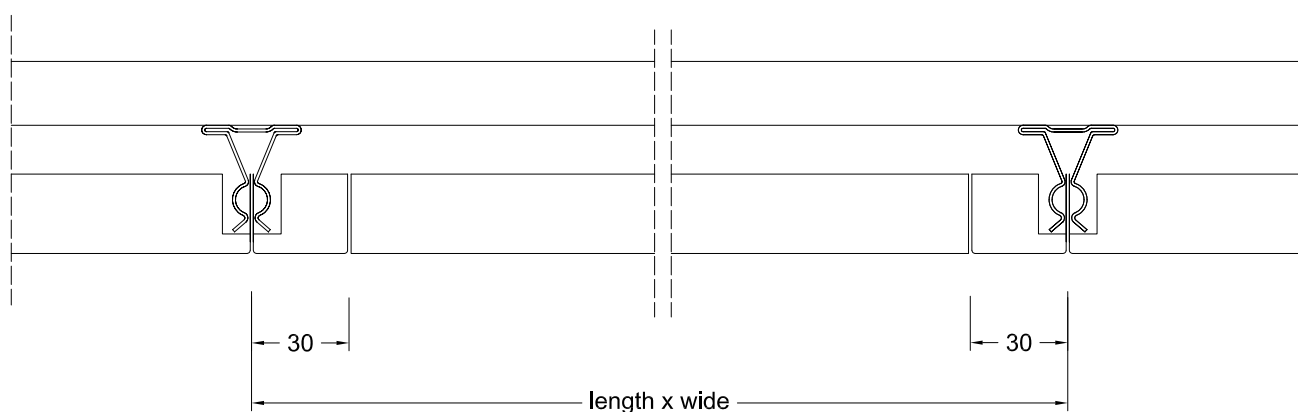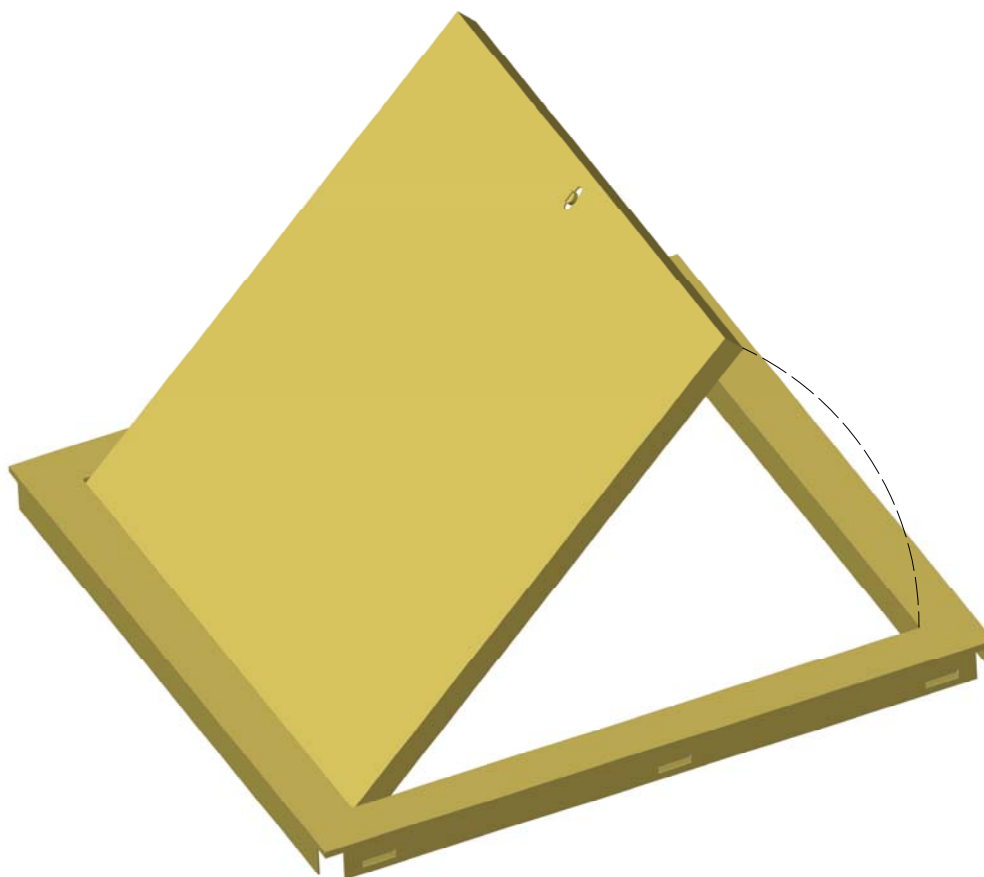


WALL TRIM TYPES

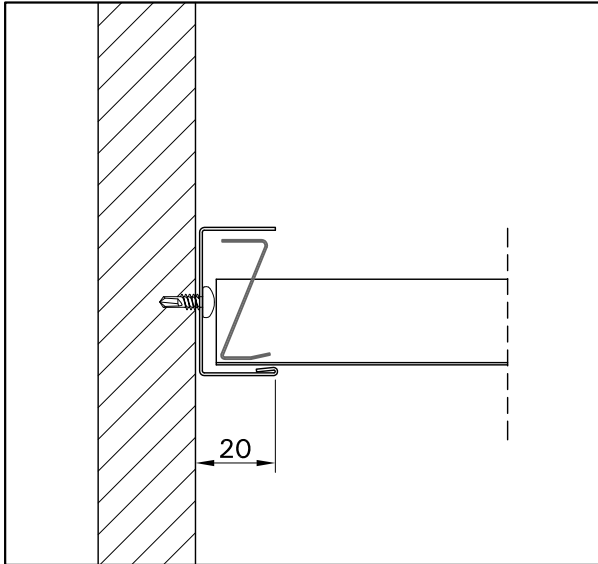


Profile U 20X40

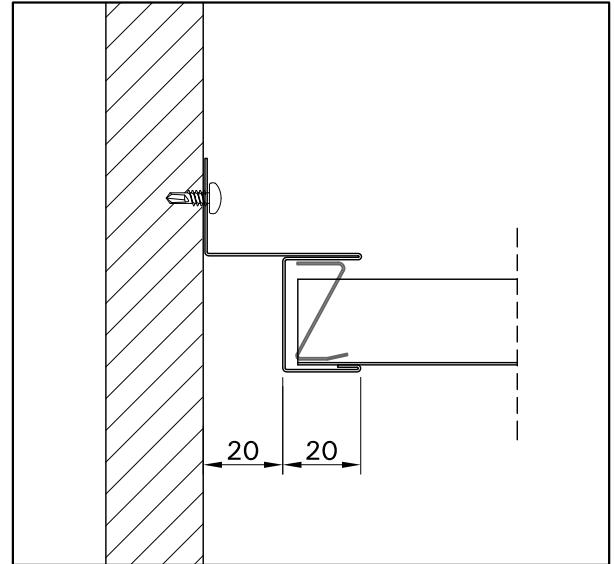

Profile W1

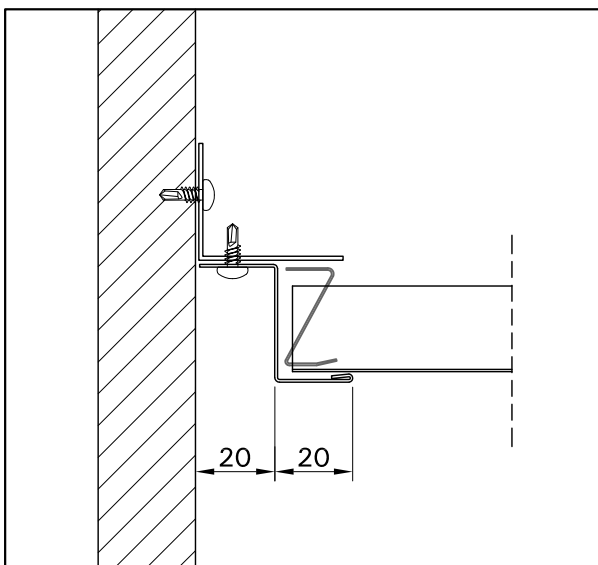



Profile W2

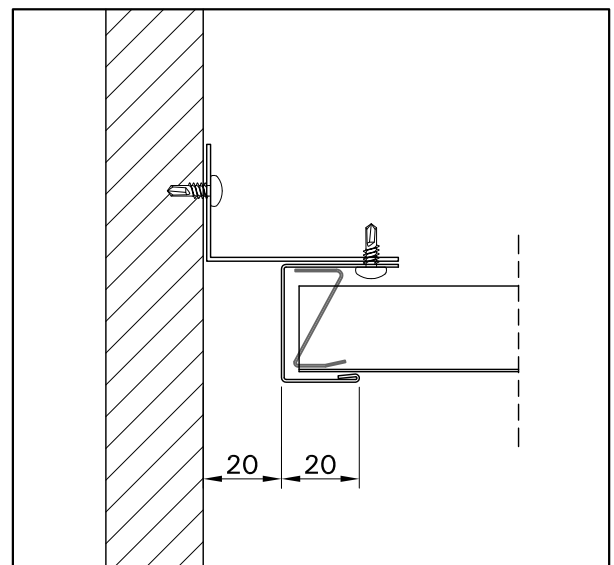

Profile W3







Cassette Reinforcement

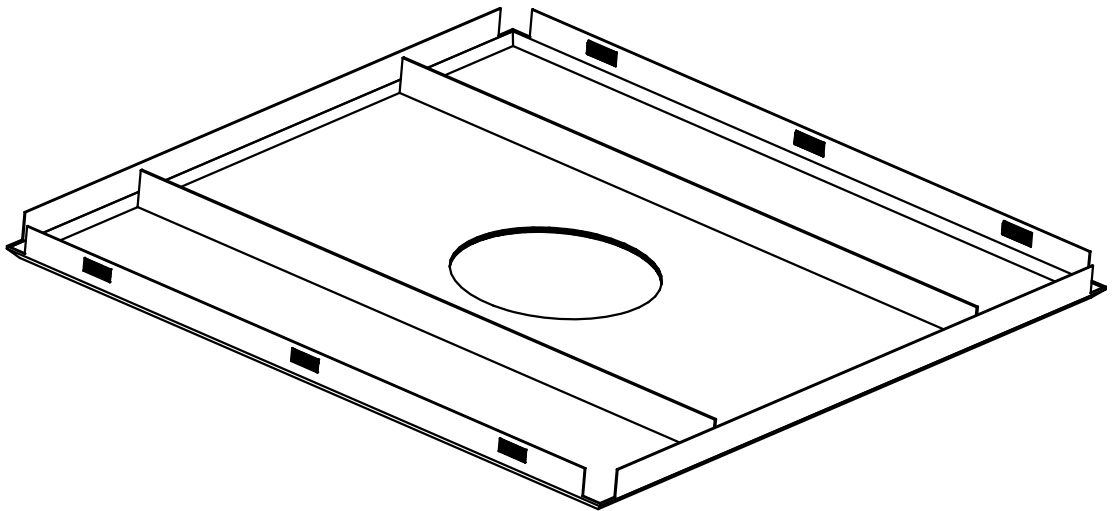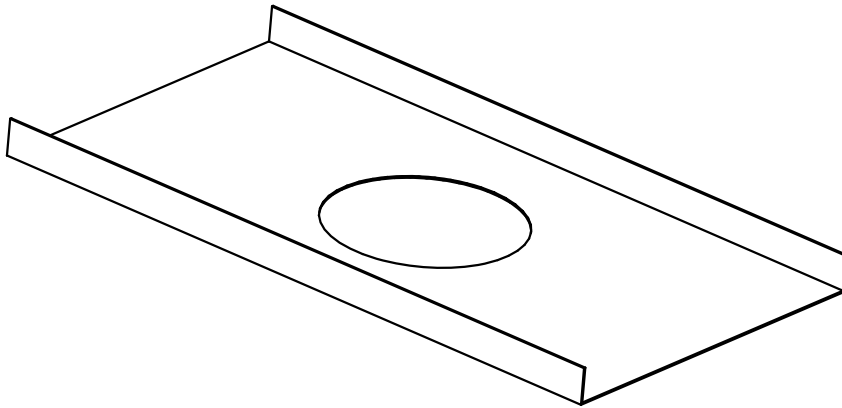

CURVE CEILING




CURVE CEILING TILE 500

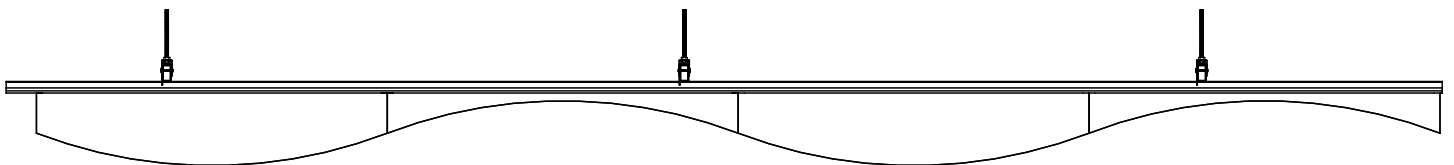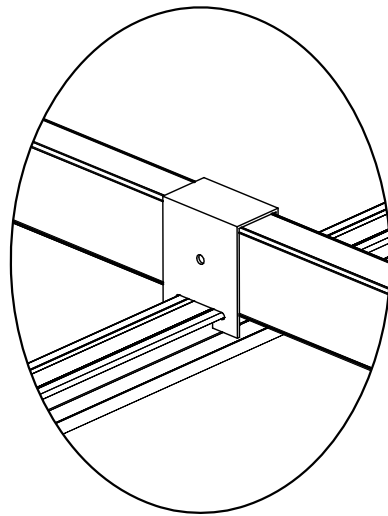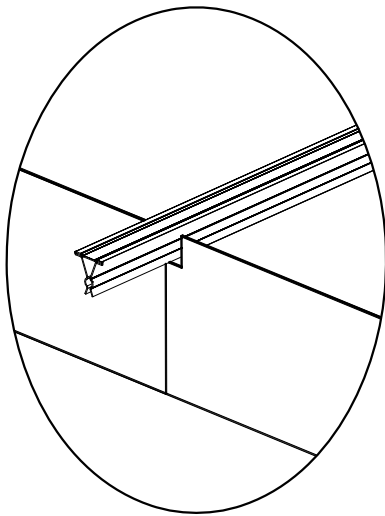
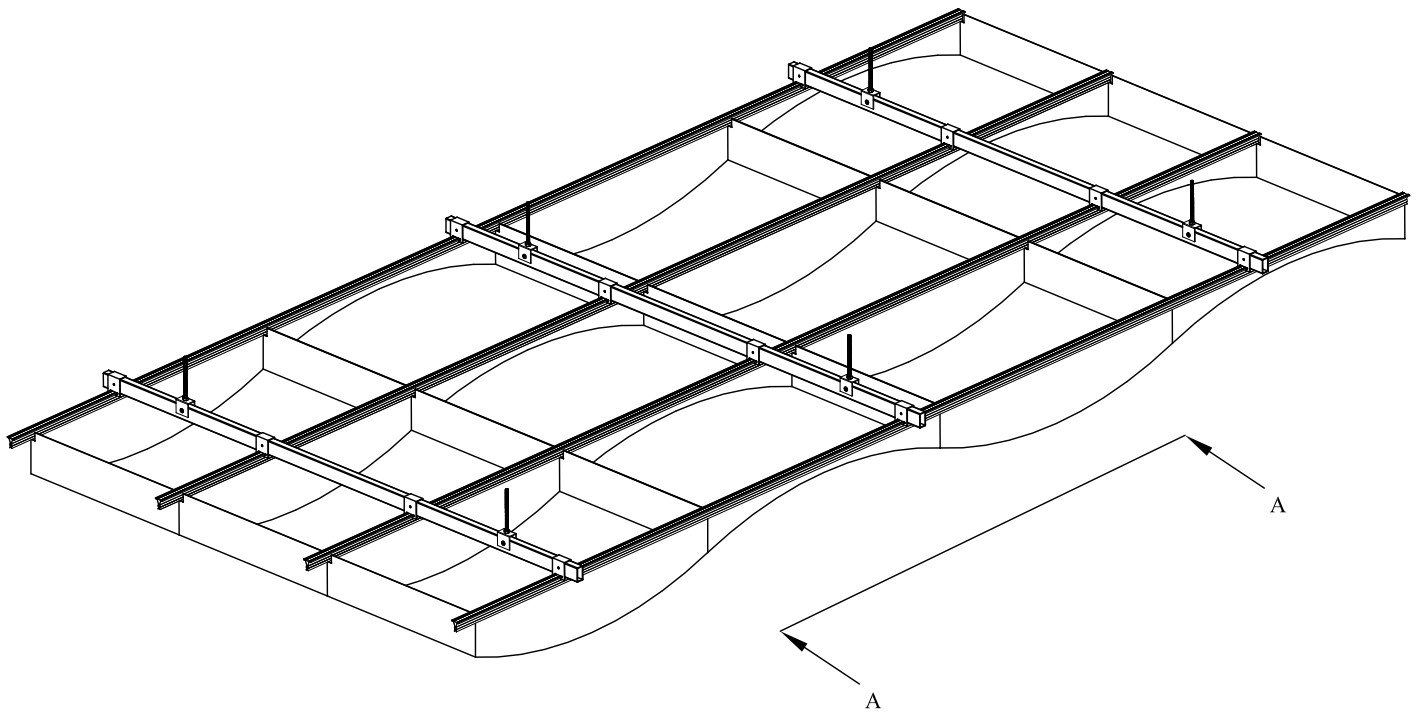


Section A-A

WEISSHELLAS-INTERNA STRIPS

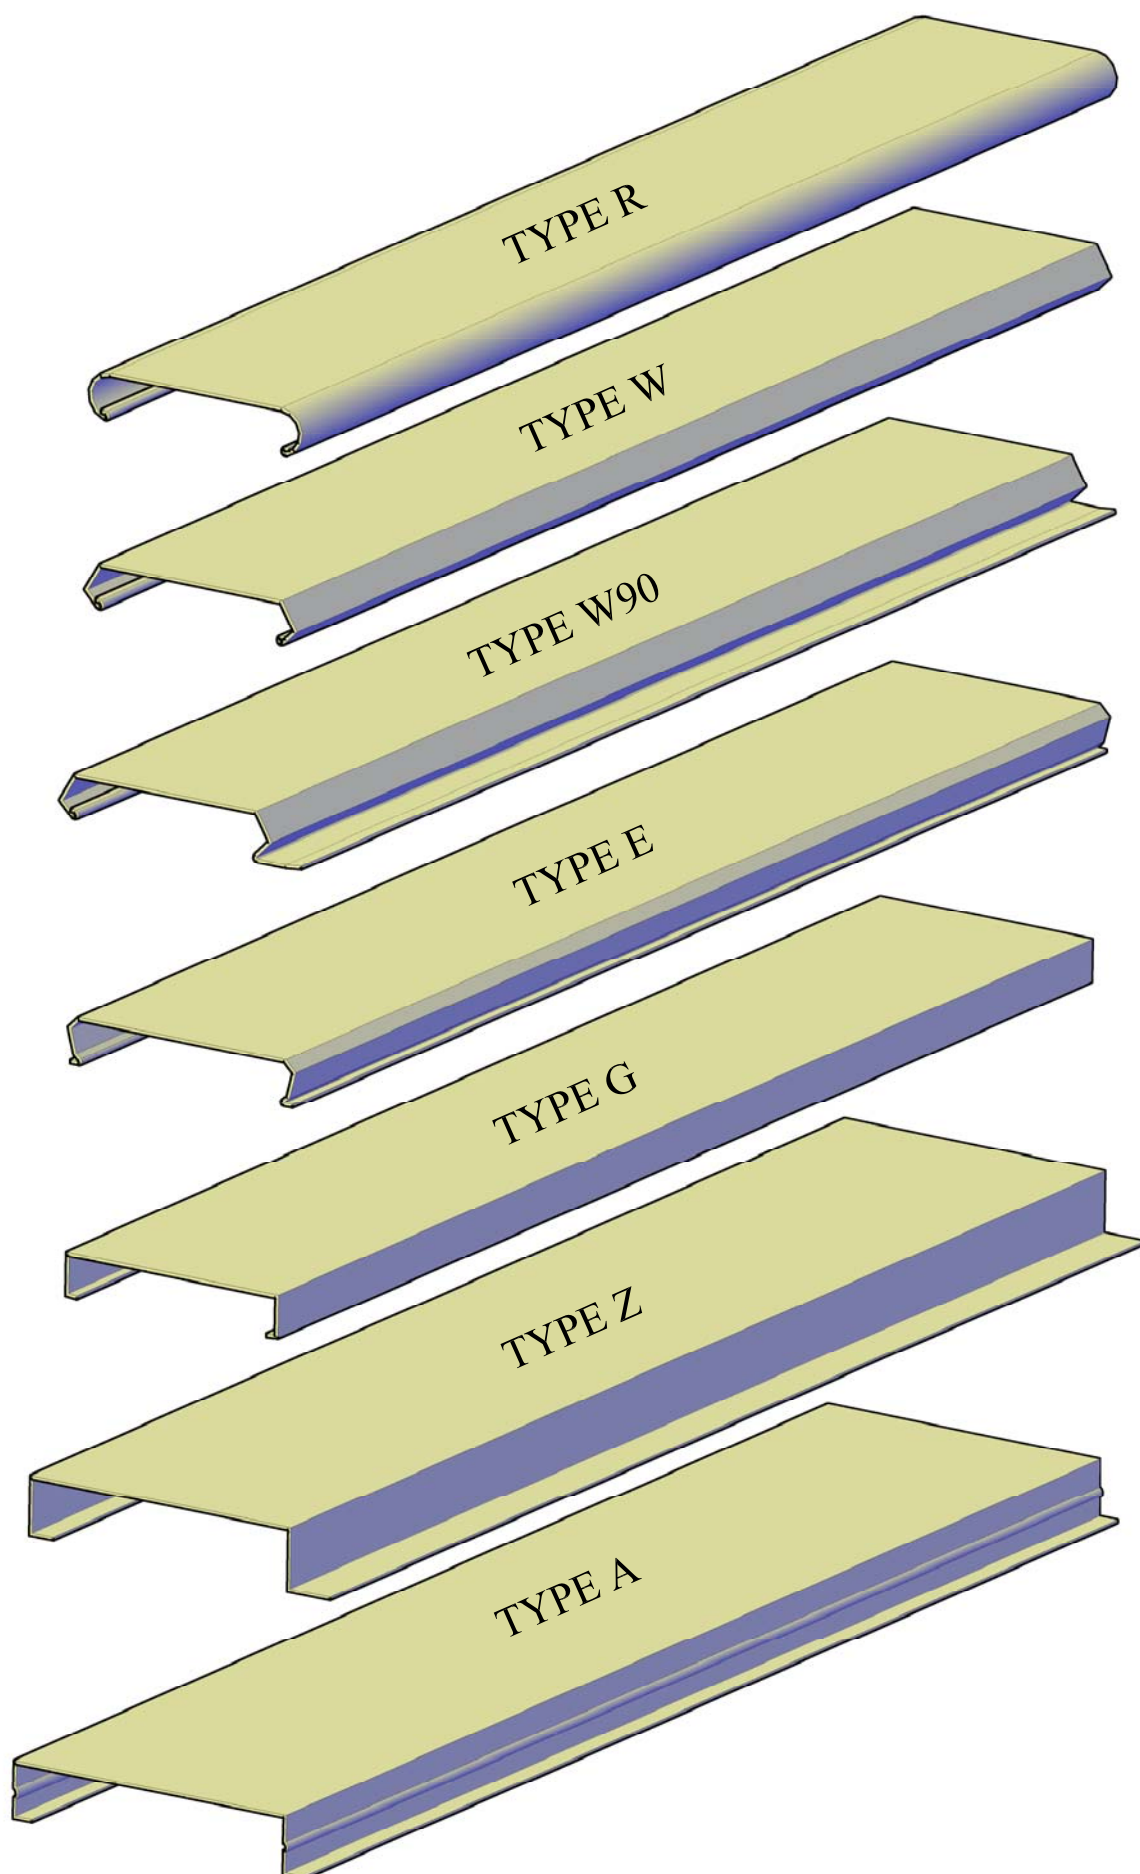


Strips Z50 (30 + 20 Closed)

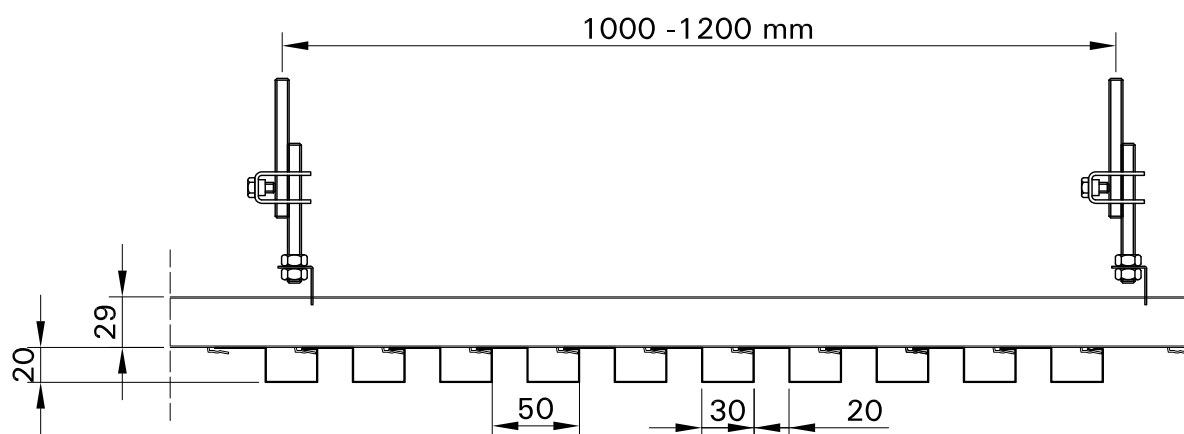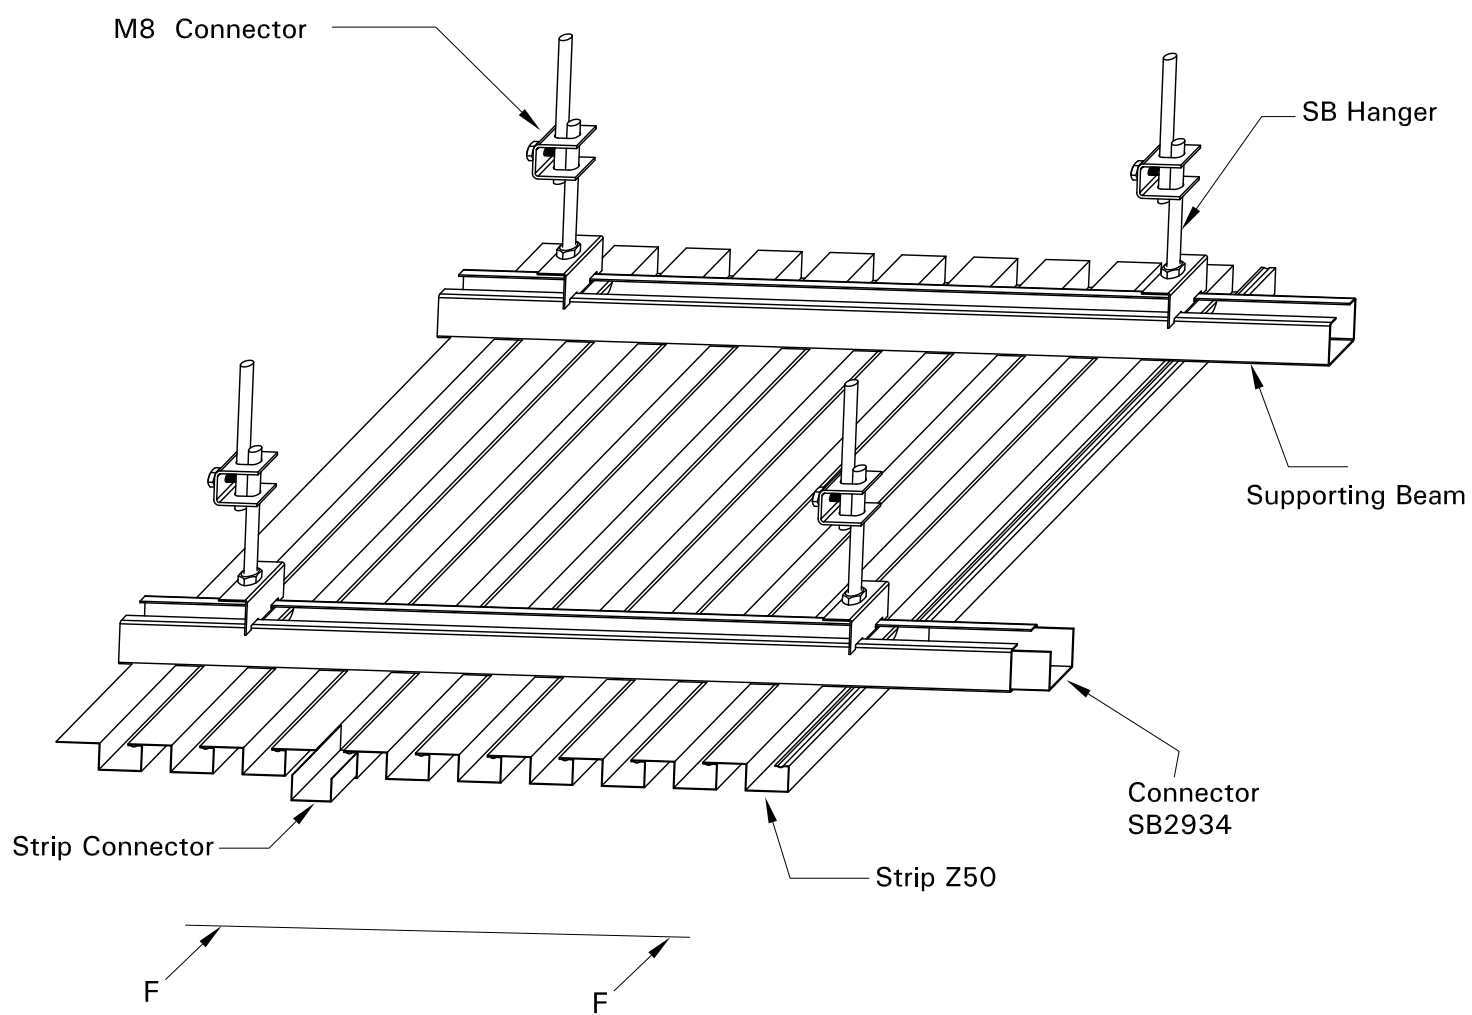

DETAIL "F - F "

Strips Z50 (30 + 20 Closed)

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		Z50 (30 + 20)	Strip 50 mm closed groove	Fe 0.5 → 8	20 Lm
				ALu 0.5 → 2.77	
2		SOZ50	Strip Connector	Fe 0.12	upon request
3		SB2934	Supporting Beam	Fe 0.796	1 Lm
4		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
5		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
6		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
7		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
8		TS70	Spring Z	ALu 0.017 kg / pcs	upon request





Perforated Ø2 - 15 %		
Ventilation I :		OPEN AREA 1.02 %
Ventilation II :		OPEN AREA 2.04 %

Strips Z300













Strips Z300 (280 + 20)

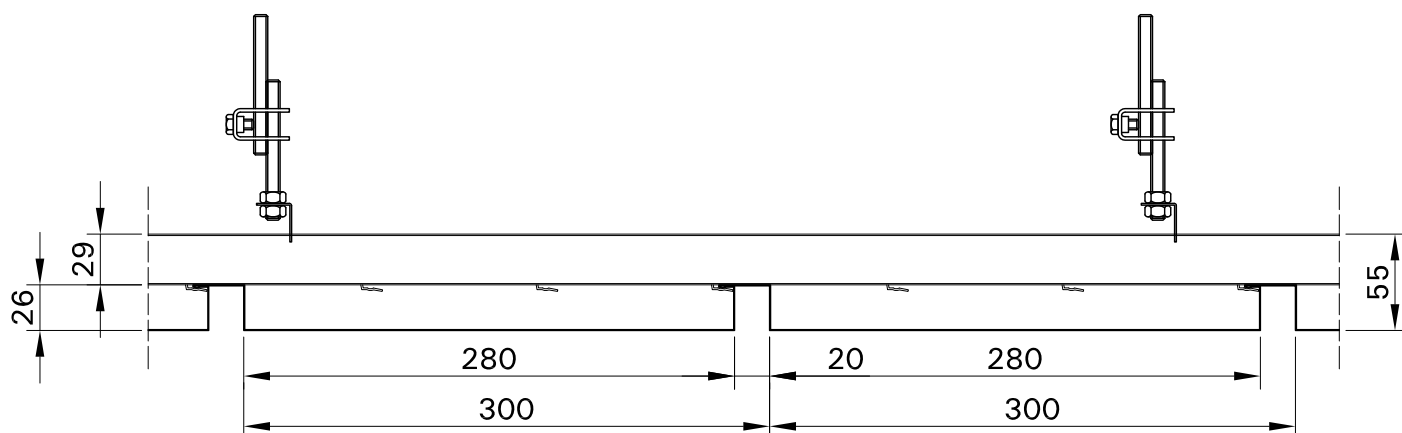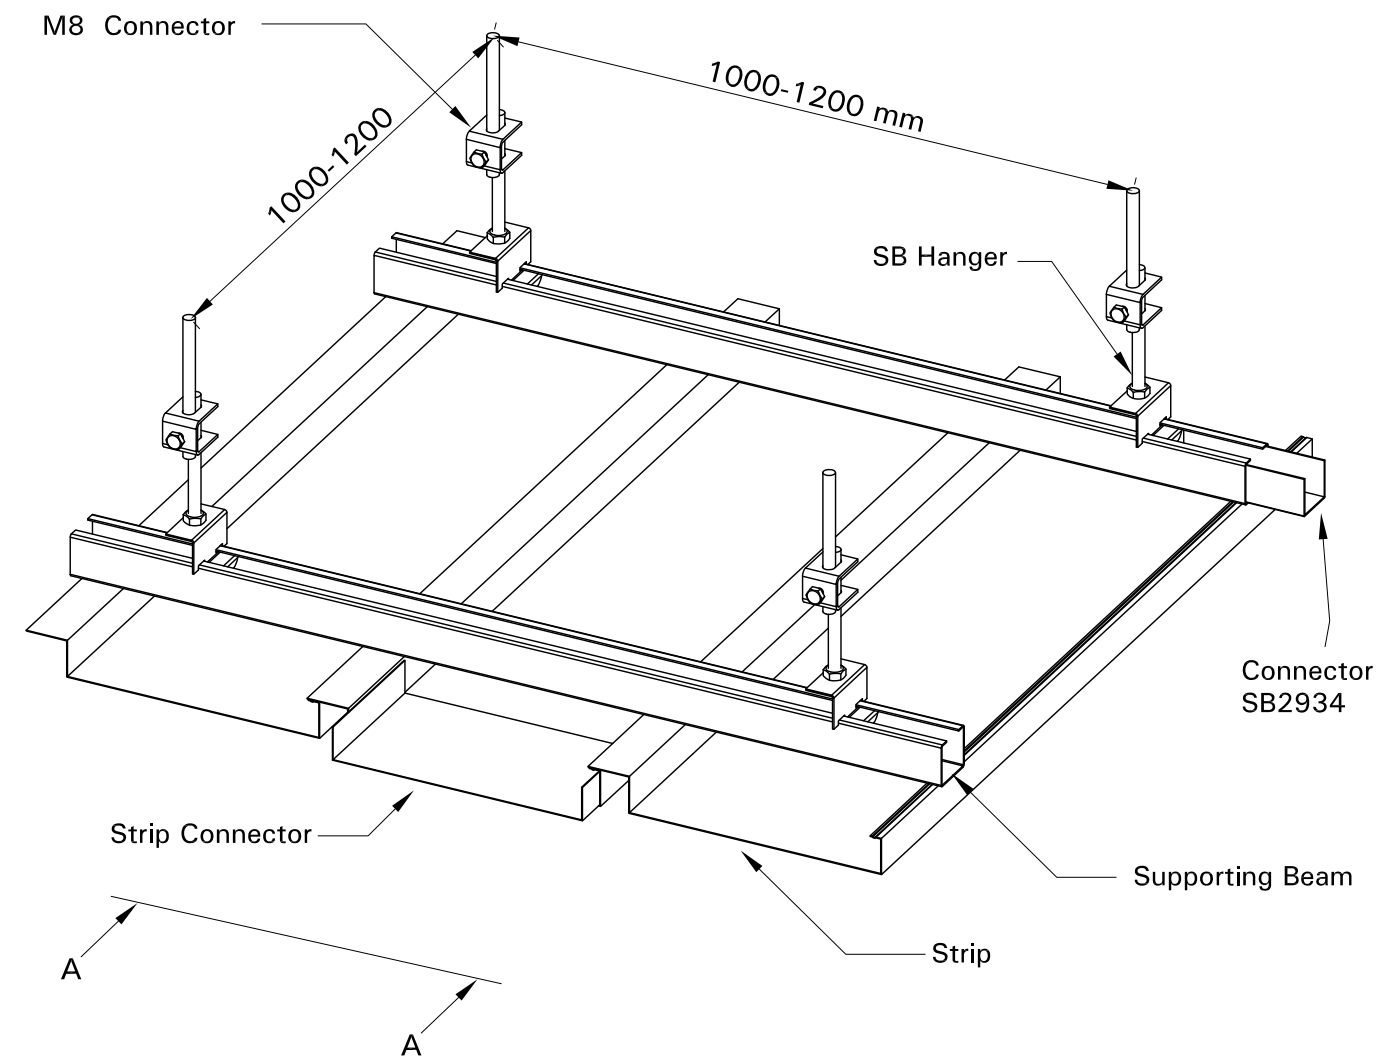

DETAIL "A - A "



Strips Z300 (280 + 20)

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		Z300 (280 + 20)	Strip 300mm closed groove	Fe 0.6 → 5.83	3.33 Lm
				ALu 0.6 → 1.95	
				ALu 0.7 → 2.28	
2		SO280	Strip Connector	Fe 0.188	upon request
3		SBZ2934	Supporting Beam	Fe 0.796	1 Lm
4		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
5		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
6		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
7		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
8		TS70	Spring Z	ALu 0.017 kg / pcs	upon request
9		FE	Fix End	Fe 0.049 kg / pcs	upon request



Strips Z300 (280 + 20)- Slots Ventilation










Ventilation I		OPEN AREA 0.95 % M ²
Ventilation II		OPEN AREA 2.85 % M ²

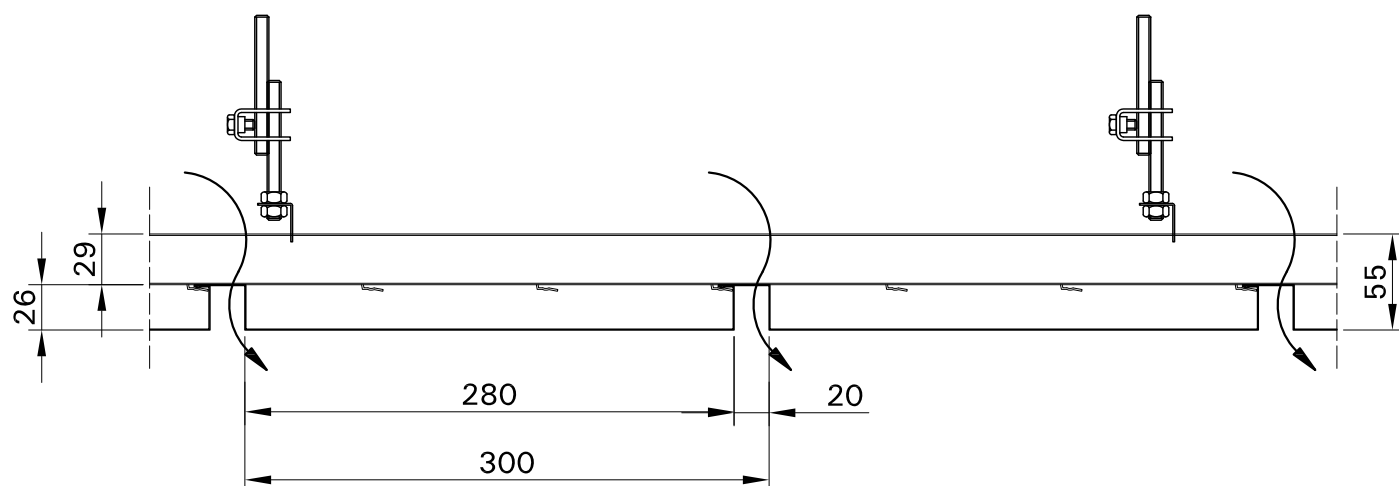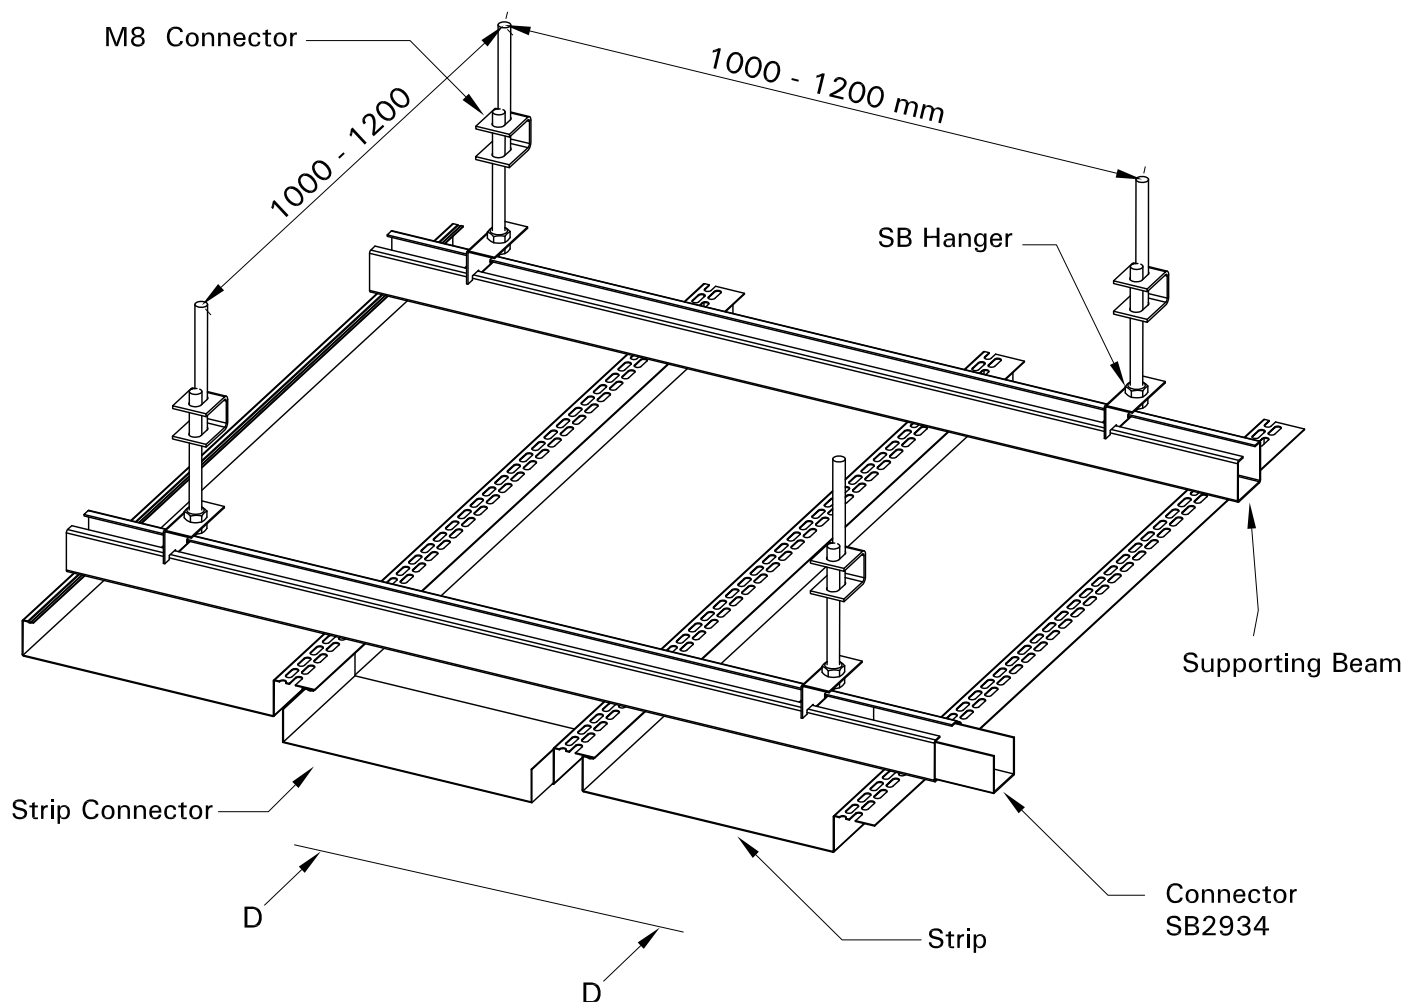


DETAIL "D - D "





Strips Z300 (280 + 20)- Slots Ventilation

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		Z300 (280 + 20)	Strip 300mm closed groove	Fe 0.6 → 5.13	3.33 Lm
				ALu 0.6 → 1.71	
				ALu 0.7 → 2.00	
2		SOZ280	Strip Connector	Fe 0.188	upon request
3		SB2934	Supporting Beam	Fe 0.796	1 Lm
4		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
5		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
6		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
7		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
8		TS70	Spring Z	ALu 0.017 kg / pcs	upon request
9		FE	Fix End	Fe 0.049 kg / pcs	upon request

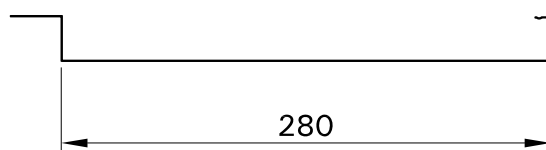










Strips Z200 (190 + 10 Closed)

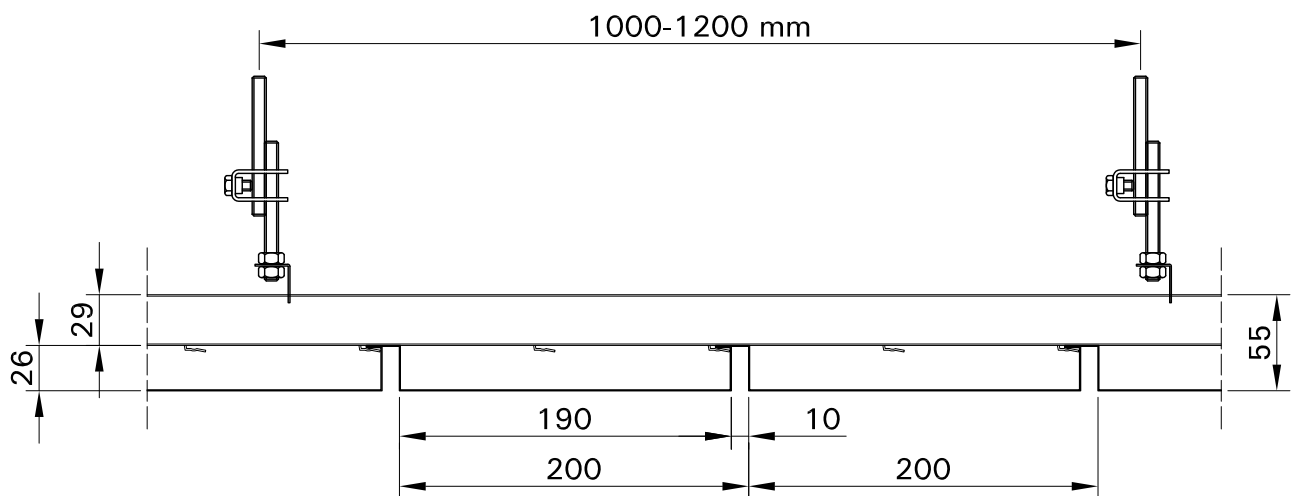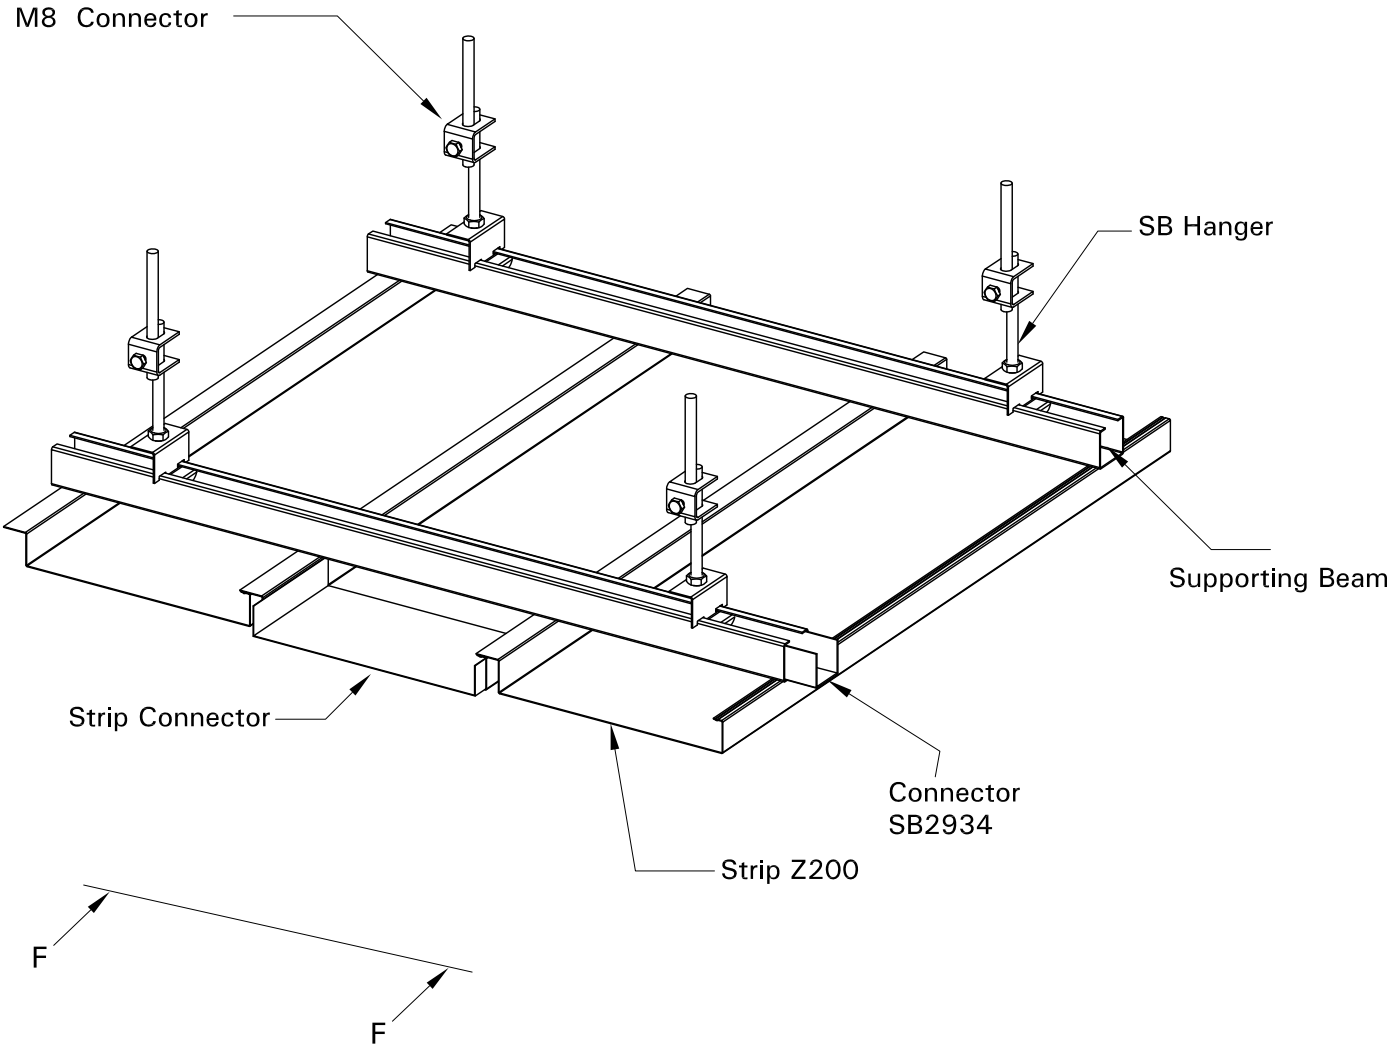

DETAIL "F - F "





Strips Z200 (190 + 10 Closed)

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		Z200 (190 + 10)	Strip 200mm closed groove	Fe 0.6 → 5.83	5 Lm
				ALu 0.6 → 1.95	
				ALu 0.7 → 2.28	
2		SOZ280	Strip Connector	Fe 0.12	upon request
3		SB2934	Supporting Beam	Fe 0.796	1 Lm
4		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
5		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
6		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
7		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
8		TS70	Spring Z	ALu 0.017 kg / pcs	upon request
9		FE	Fix End	Fe 0.049 kg / pcs	upon request

Strips G40+20gap



STRIP G40X50

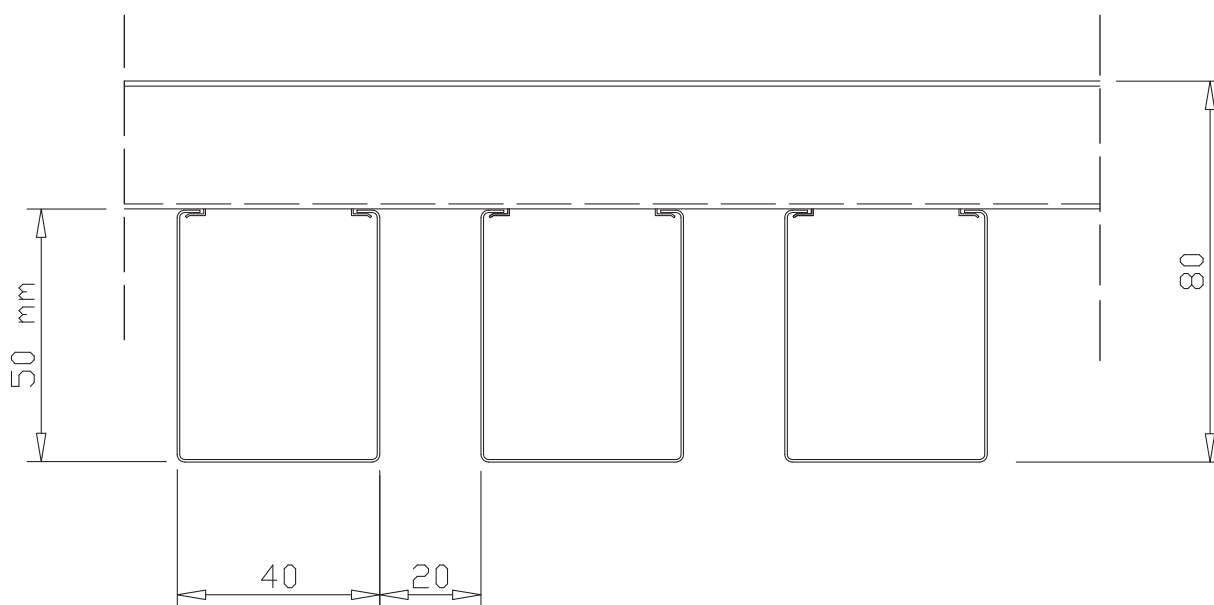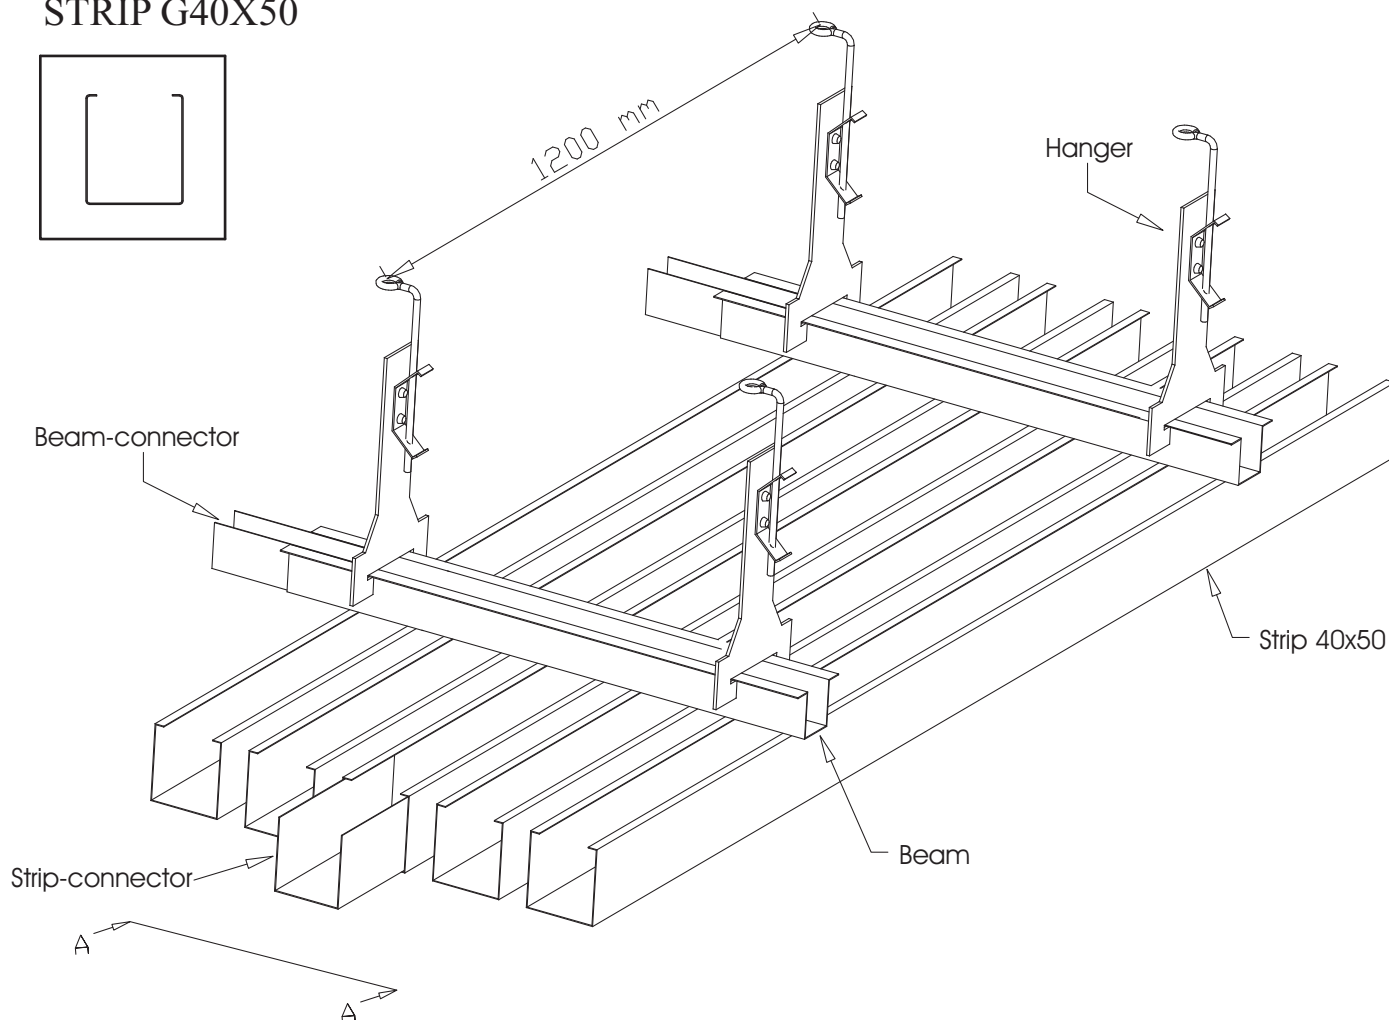

DETAIL "A-A"



Strips G100



Strips G200













Strips G300 (290 + 10 Gap)

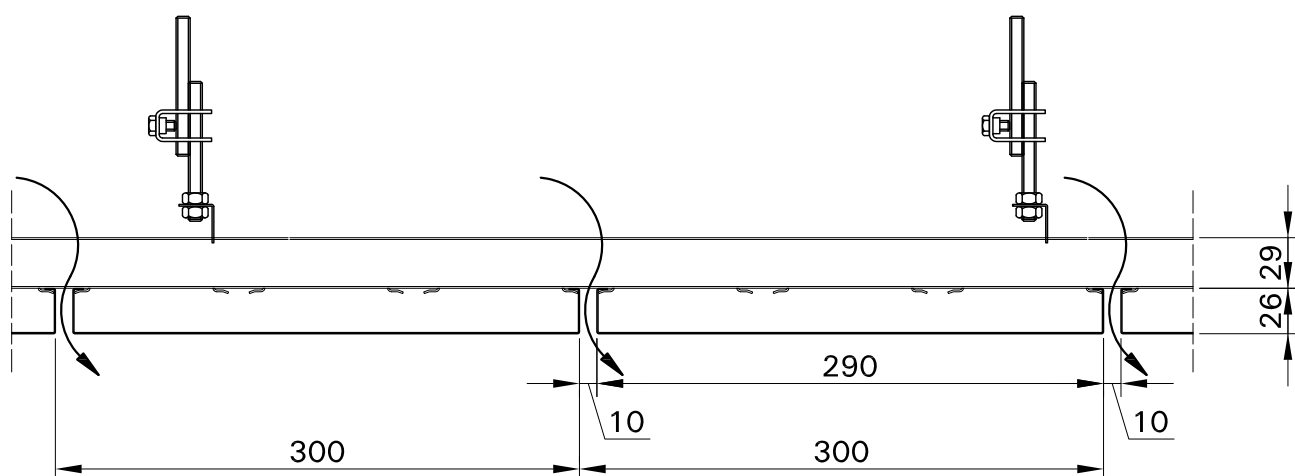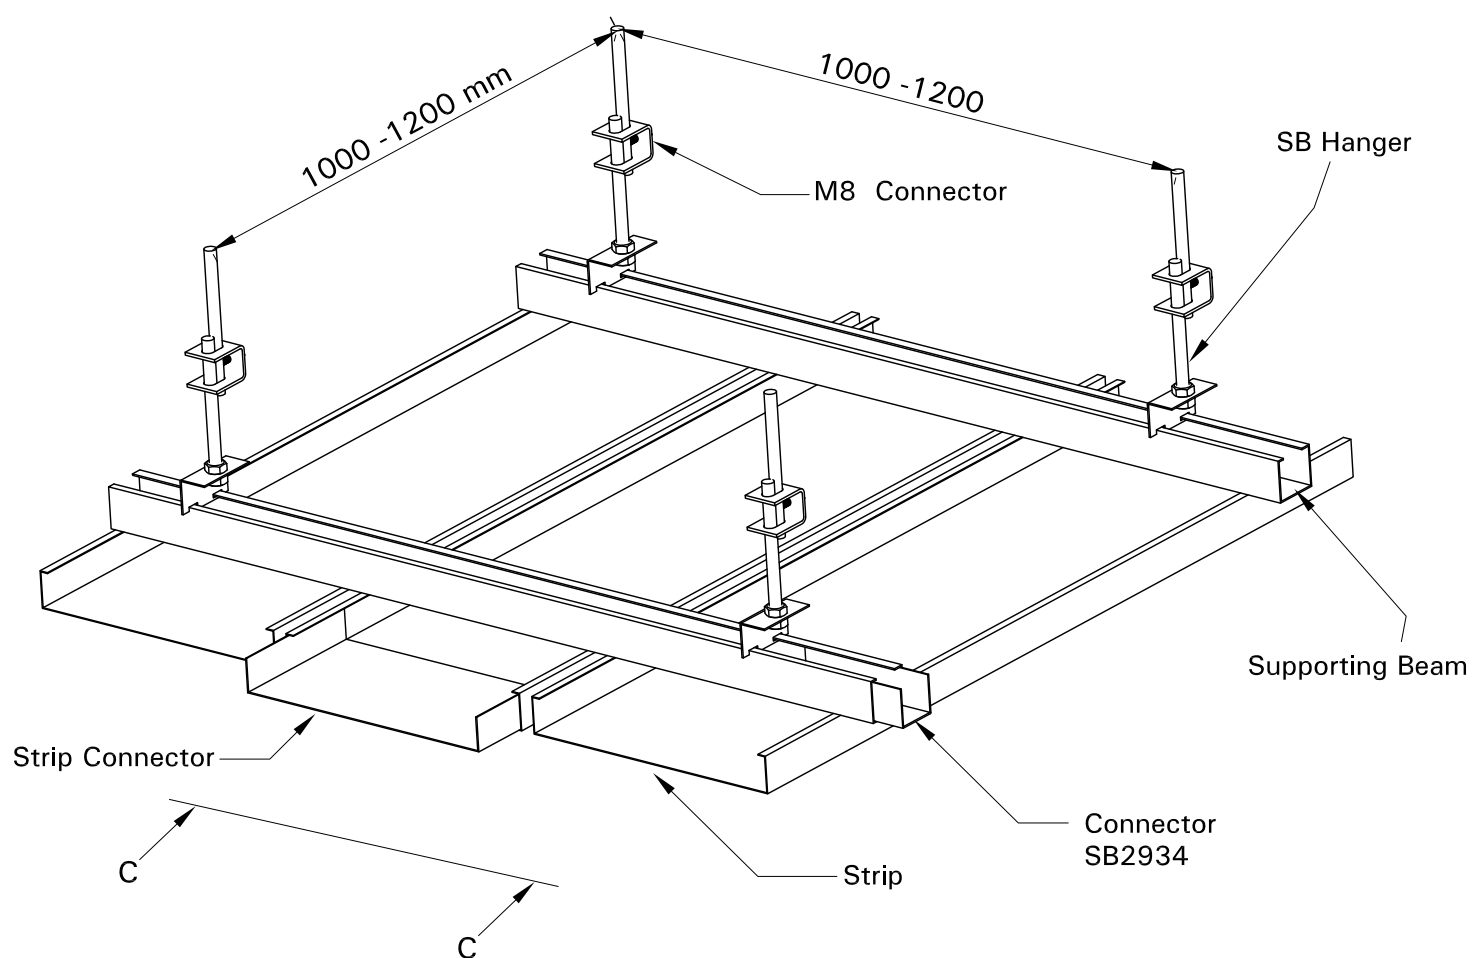



DETAIL " C - C "

Strips G300 (290 + 10 Gap)

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		G300 (290 + 10)	Strip 300mm 10 mm gap	Fe 0.6 → 5.56	3.33 Lm
				ALu 0.6 → 1.88	
				ALu 0.7 → 2.20	
2		SOZ280	Strip Connector	Fe 0.188	upon request
3		SB2934	Supporting Beam	Fe 0.796	1 Lm
4		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
5		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
6		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
7		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
8		TS70	Spring Z	ALu 0.017 kg / pcs	upon request
9		FE	Fix End	Fe 0.049 kg / pcs	upon request












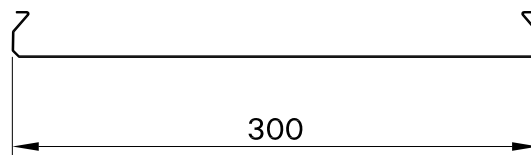
Strips E300

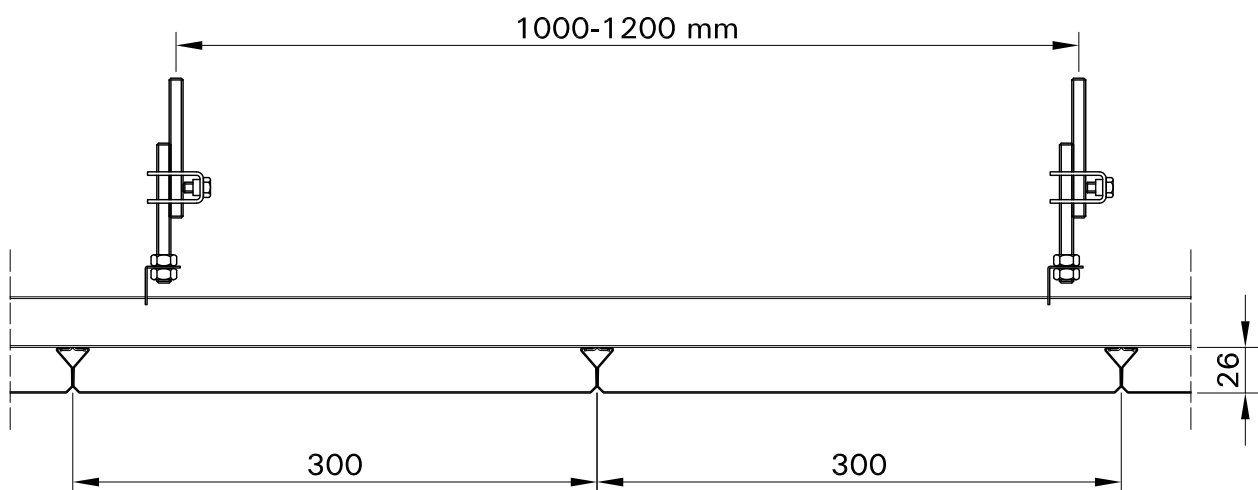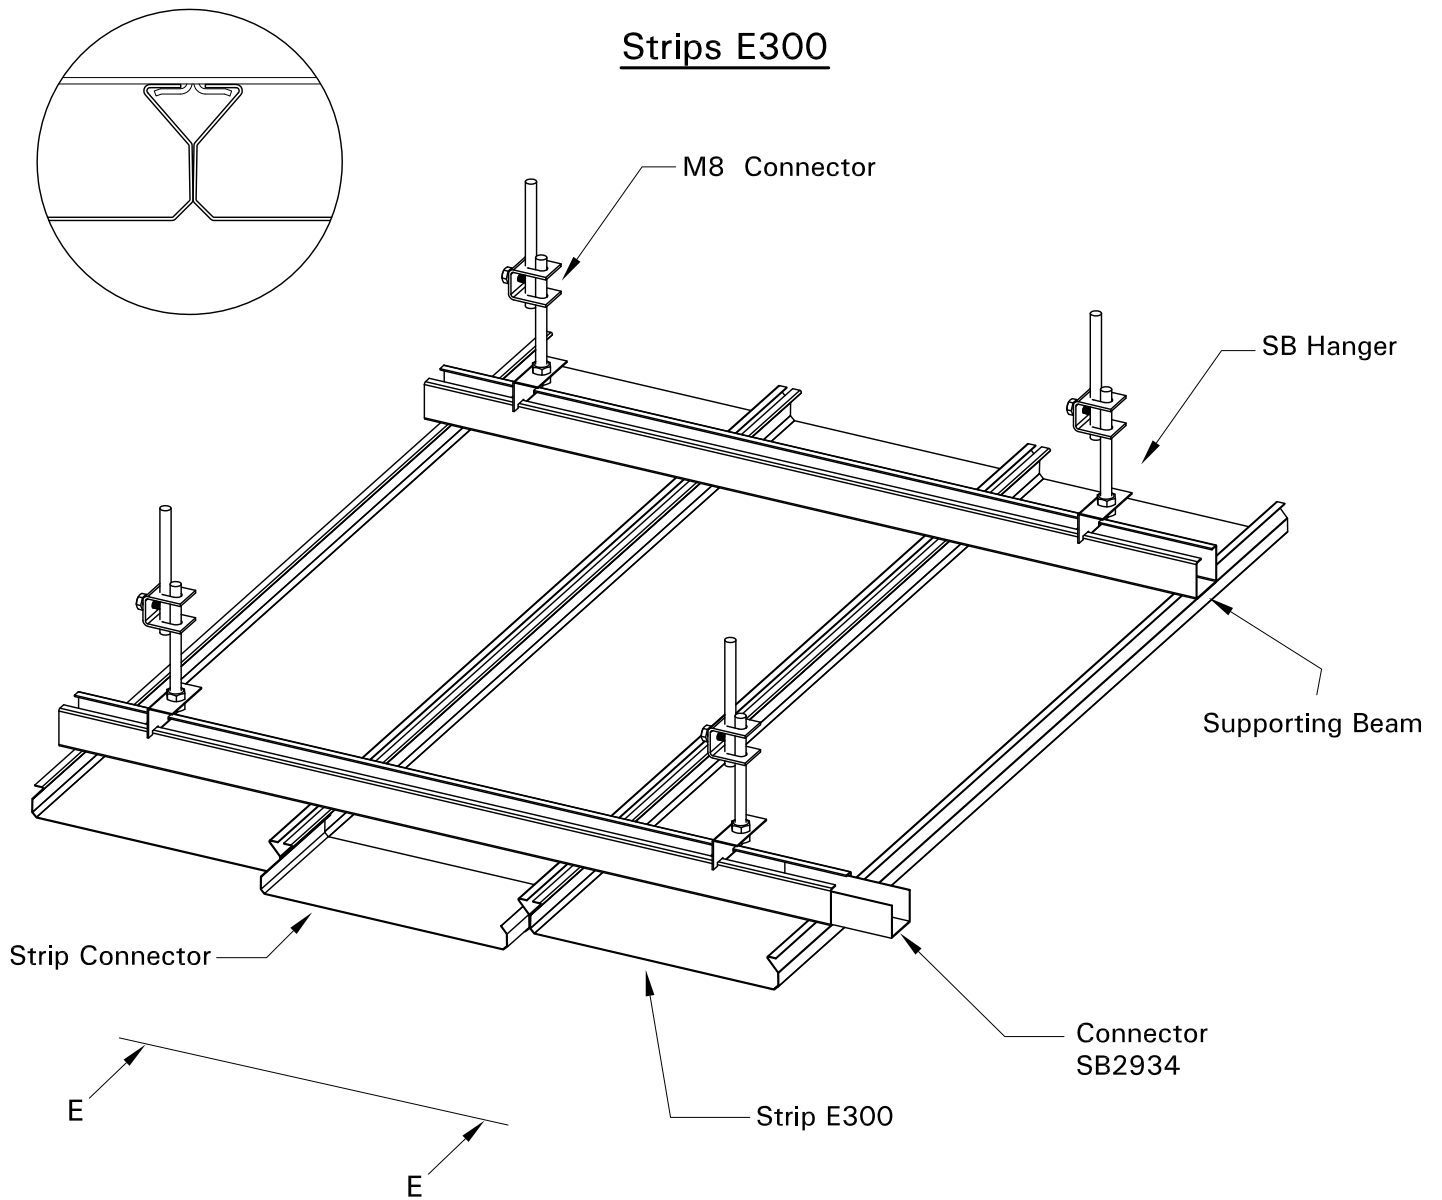



DETAIL "E - E "

Strips E300

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		E300	Strip 300mm	Fe 0.6 → 5.83	3.33 Lm
				ALu 0.6 → 1.95	
				ALu 0.7 → 2.28	
2		SOE300	Strip Connector	Fe 0.12	upon request
3		SBE2934	Supporting Beam	Fe 0.796	1 Lm
4		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
5		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
6		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
7		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
8		TS70	Spring Z	ALu 0.017 kg / pcs	upon request
9		FE	Fix End	Fe 0.049 kg / pcs	upon request













Strips E200 (Gap 10)

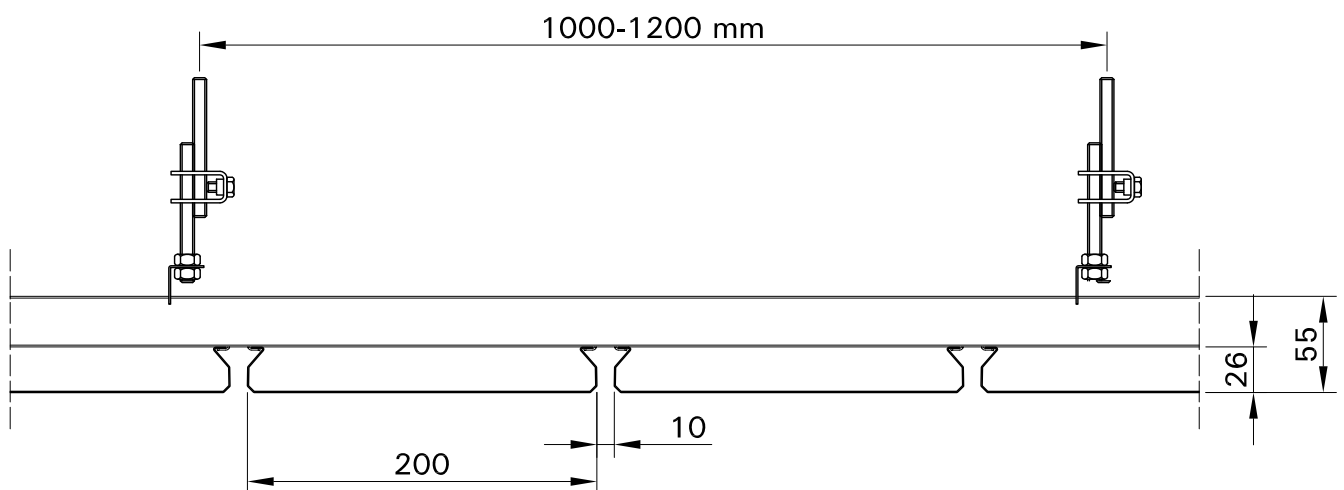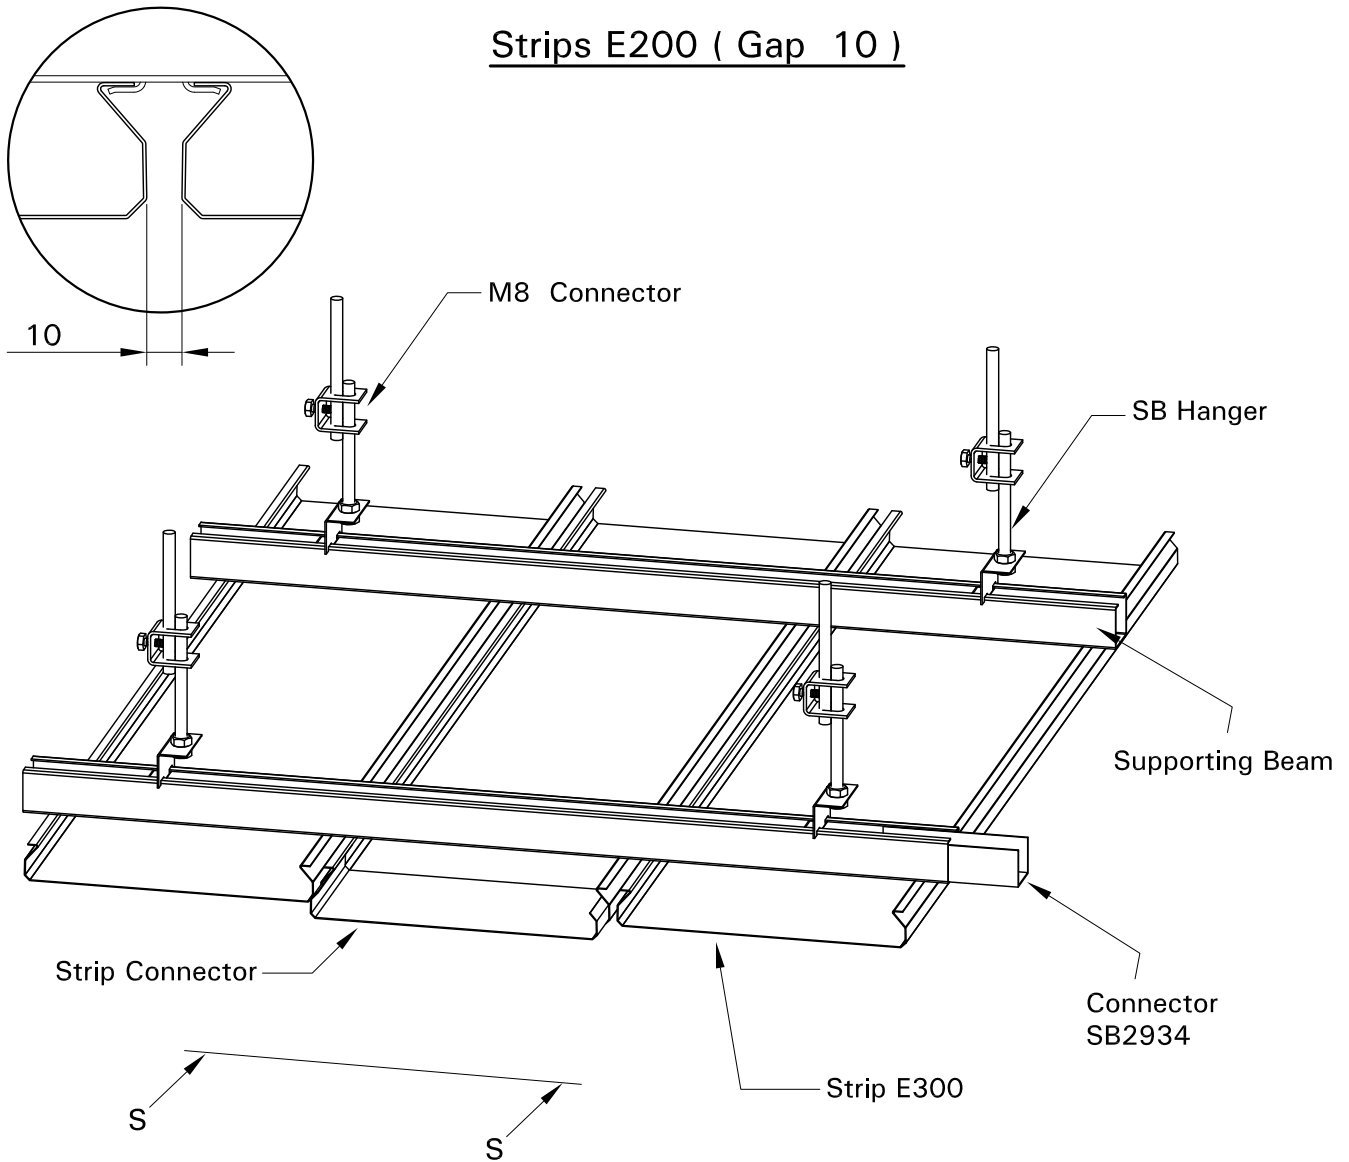



DETAIL "S - S "

Strips E200 (Gap 10)

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		E200	Strip 300mm	Fe 0.6 → 6.08	4.80 Lm
				ALu 0.6 → 2.08	
				ALu 0.7 → 2.42	
2		SOE200	Strip Connector	Fe 0.12	upon request
3		SBE2934	Supporting Beam	Fe 0.796	1 Lm
4		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
5		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
6		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
7		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
8		TS70	Spring Z	ALu 0.017 kg / pcs	upon request
9		FE	Fix End	Fe 0.049 kg / pcs	upon request





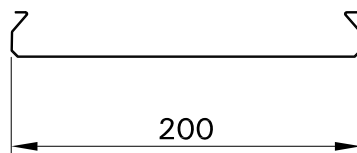






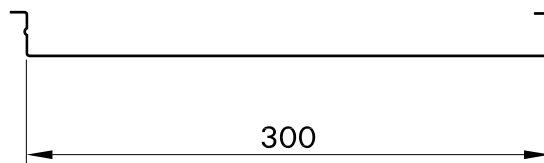
Strips A300

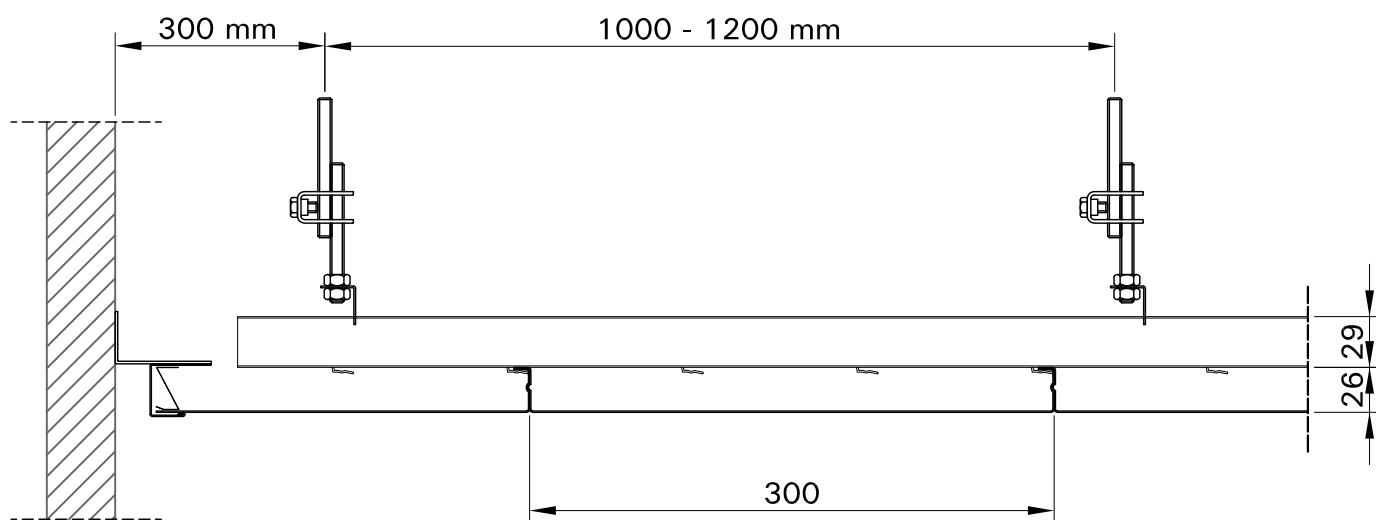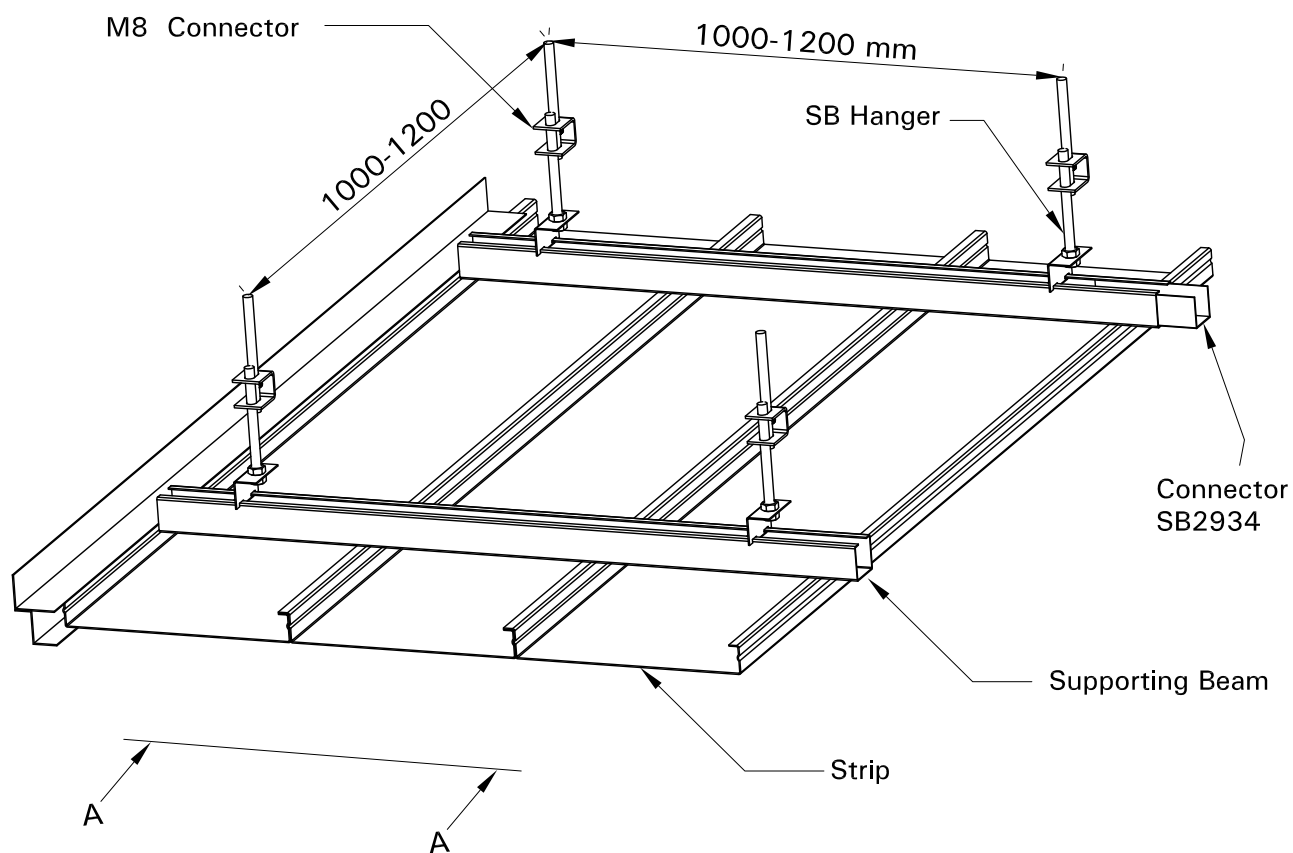


DETAIL "A - A "



Strips A300

No.	Drawing	Type	Description	KG / M ²	QTY / M ²
1		A300	Strip 300mm 10 mm gap	Fe 0.6 → 5.80	3.33 Lm
				ALu 0.6 → 2.0	
				ALu 0.7 → 2.33	
2		SOZ280	Strip Connector	Fe 0.188	upon request
3		SB2934	Supporting Beam	Fe 0.796	1 Lm
4		Connector SB2934	Supporting Beam Connector	Fe 0.025	0.32 pcs
5		SB hanger	Supporting Beam Hanger	L150mm - Fe 0.070	0.96 pcs
6		M8CO	M8 Connector	Fe 0.0288	0.96 pcs
7		B86	Wall Trim U	Fe 0.6 → 0.413 kg/Lm	upon request
				ALu 0.6 → 0.143 kg/Lm	
				ALu 0.7 → 0.167 kg/Lm	
8		TS70	Spring Z	ALu 0.017 kg / pcs	upon request
9		FE	Fix End	Fe 0.049 kg / pcs	upon request





FIX STRIP

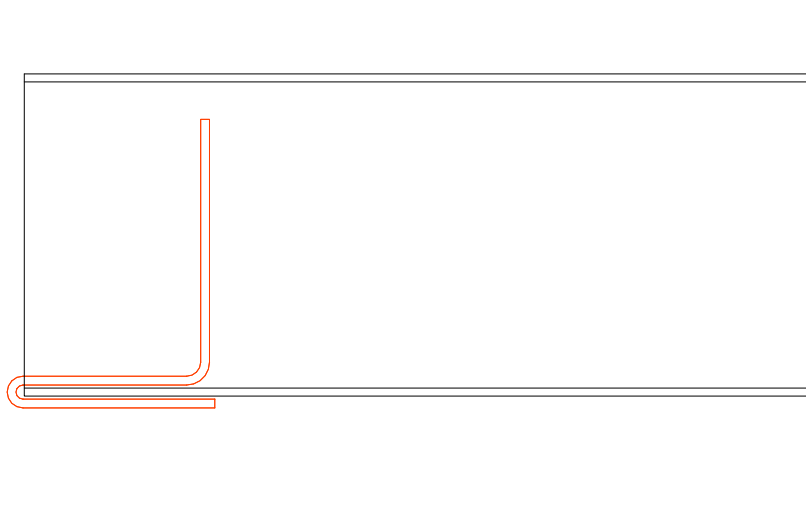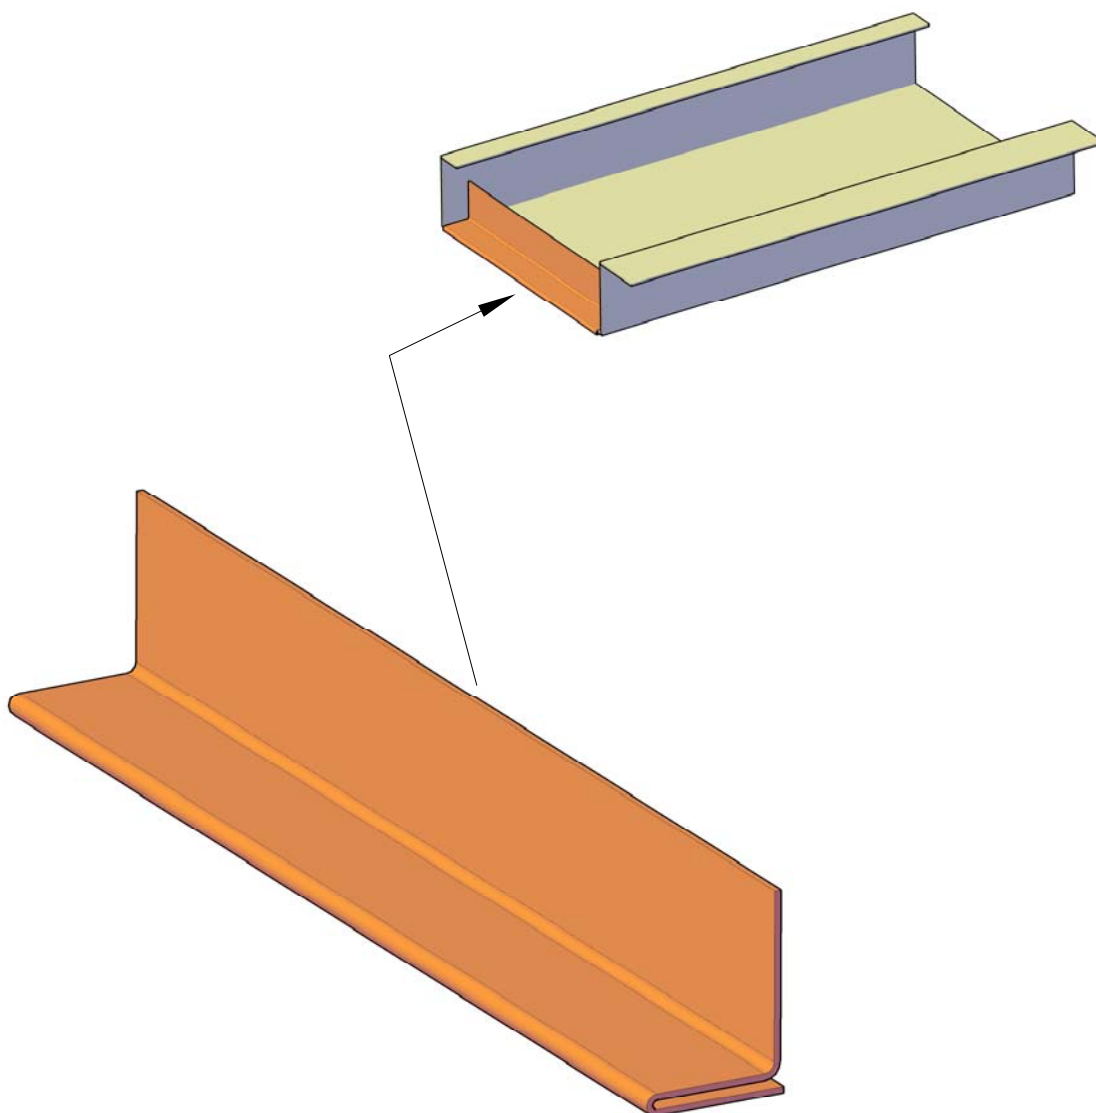


Metal Grid Ceiling





Kare (100x100) H40





Carrier connector

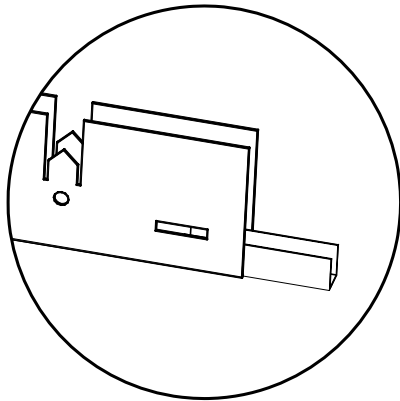

Hanger

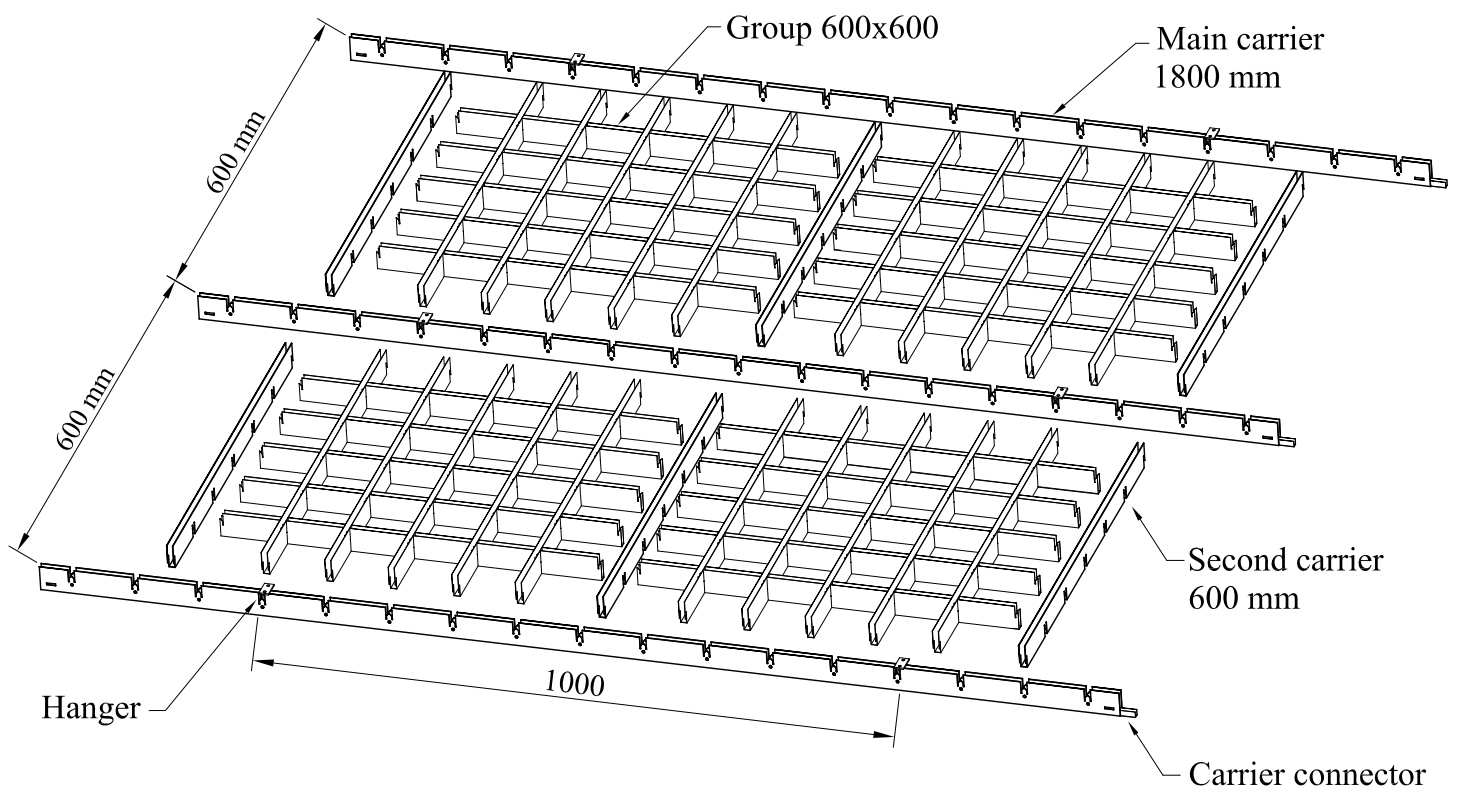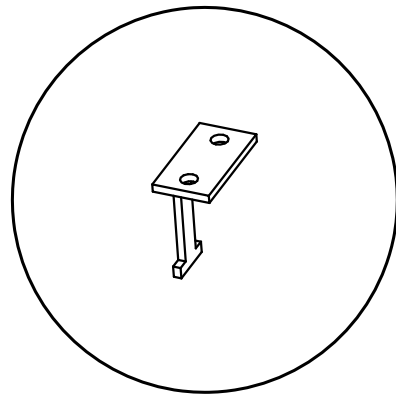


Kare with black perforated cover

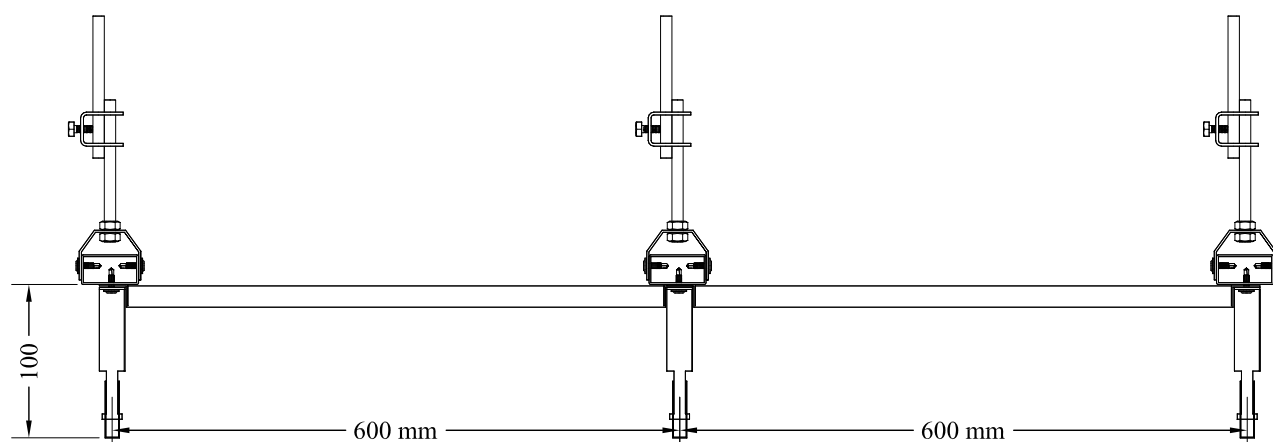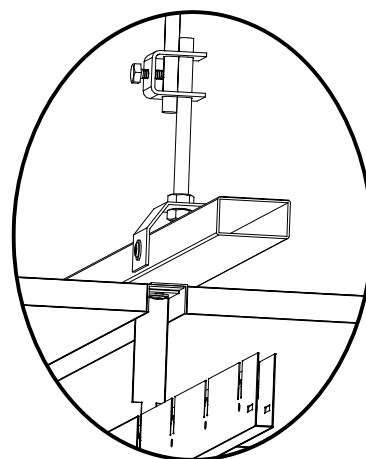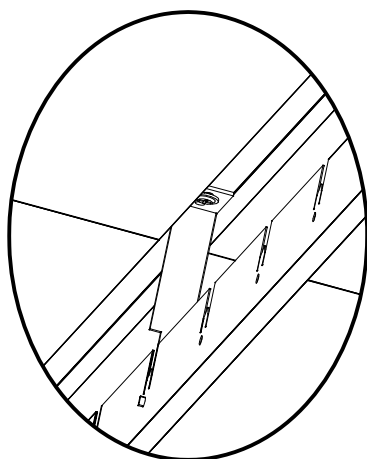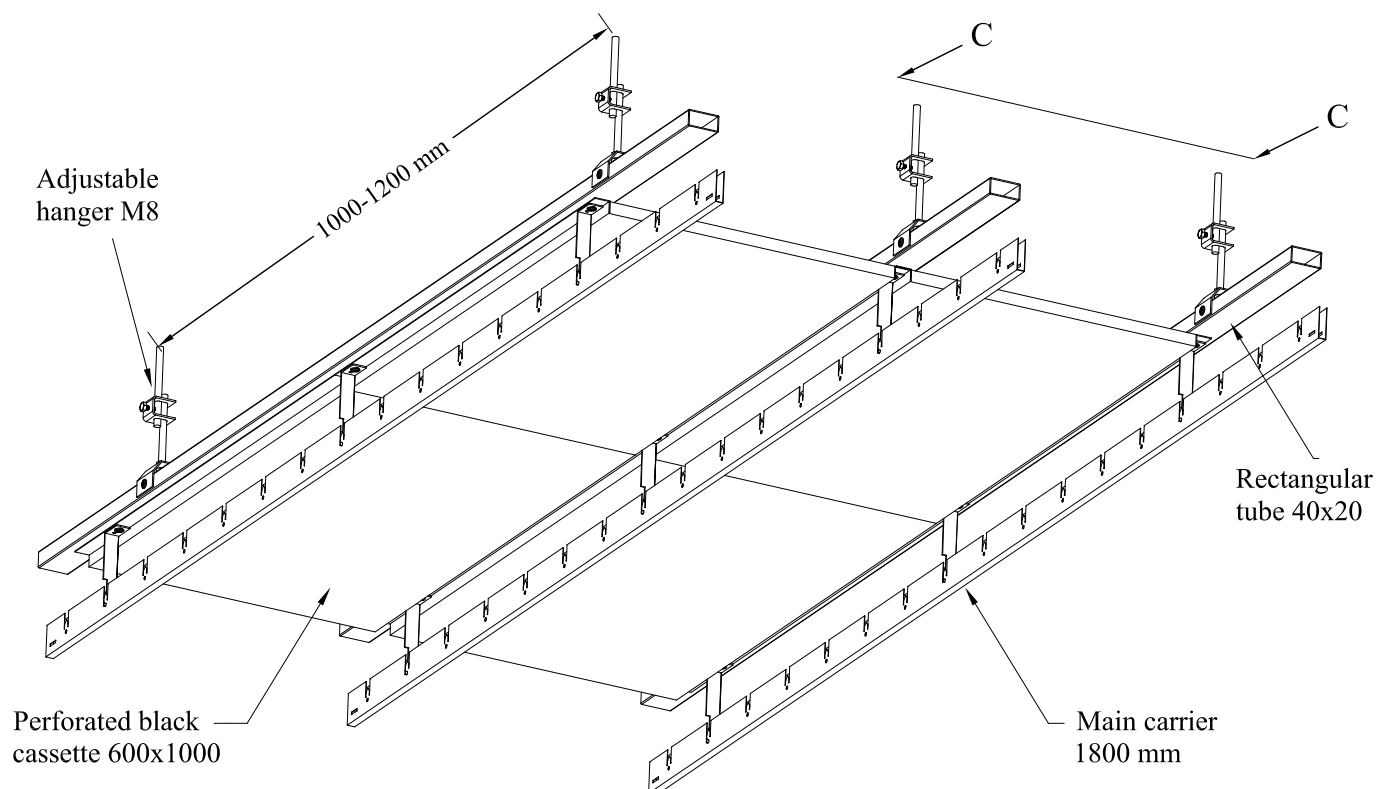


DETAIL "C-C"


Box for light

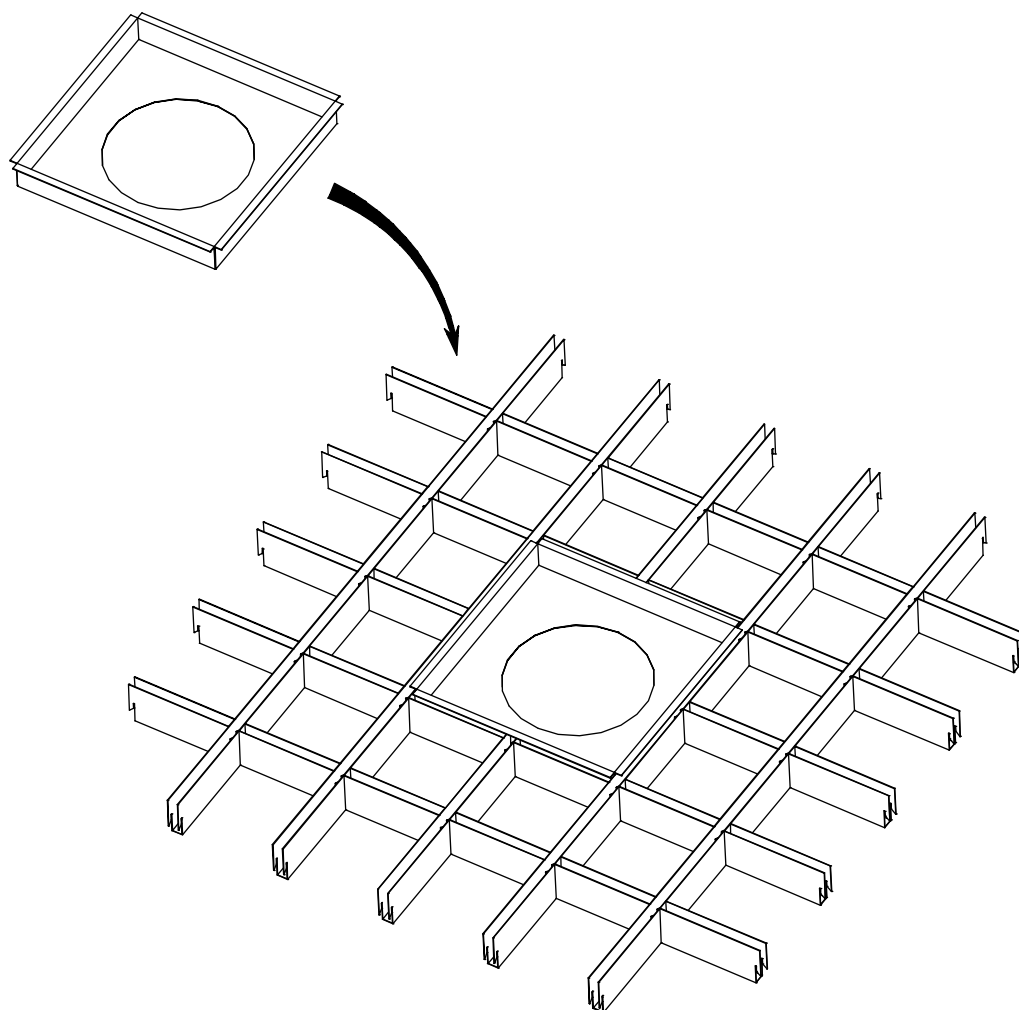



Dome Φ 1280 mm

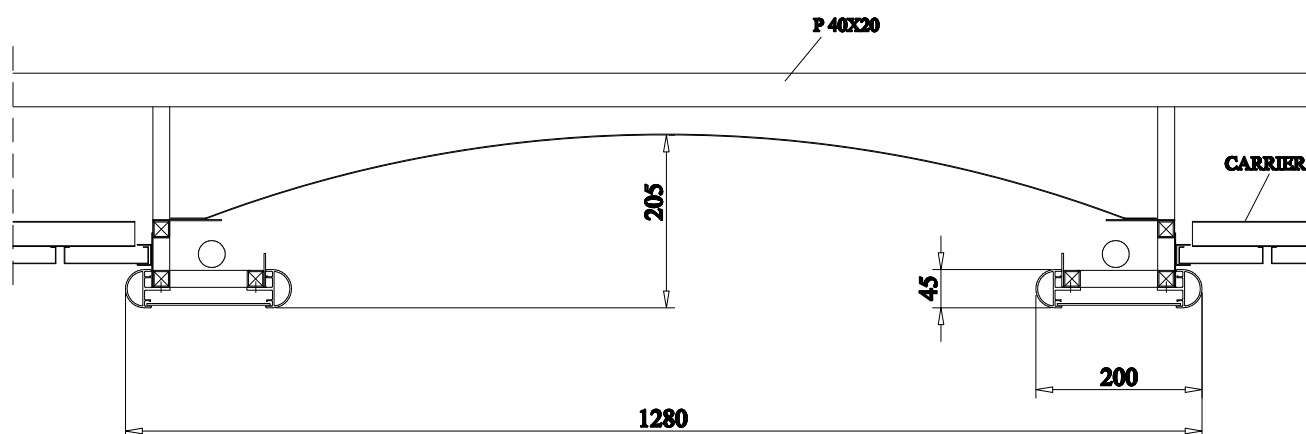



Column Dome Φ 1100 mm

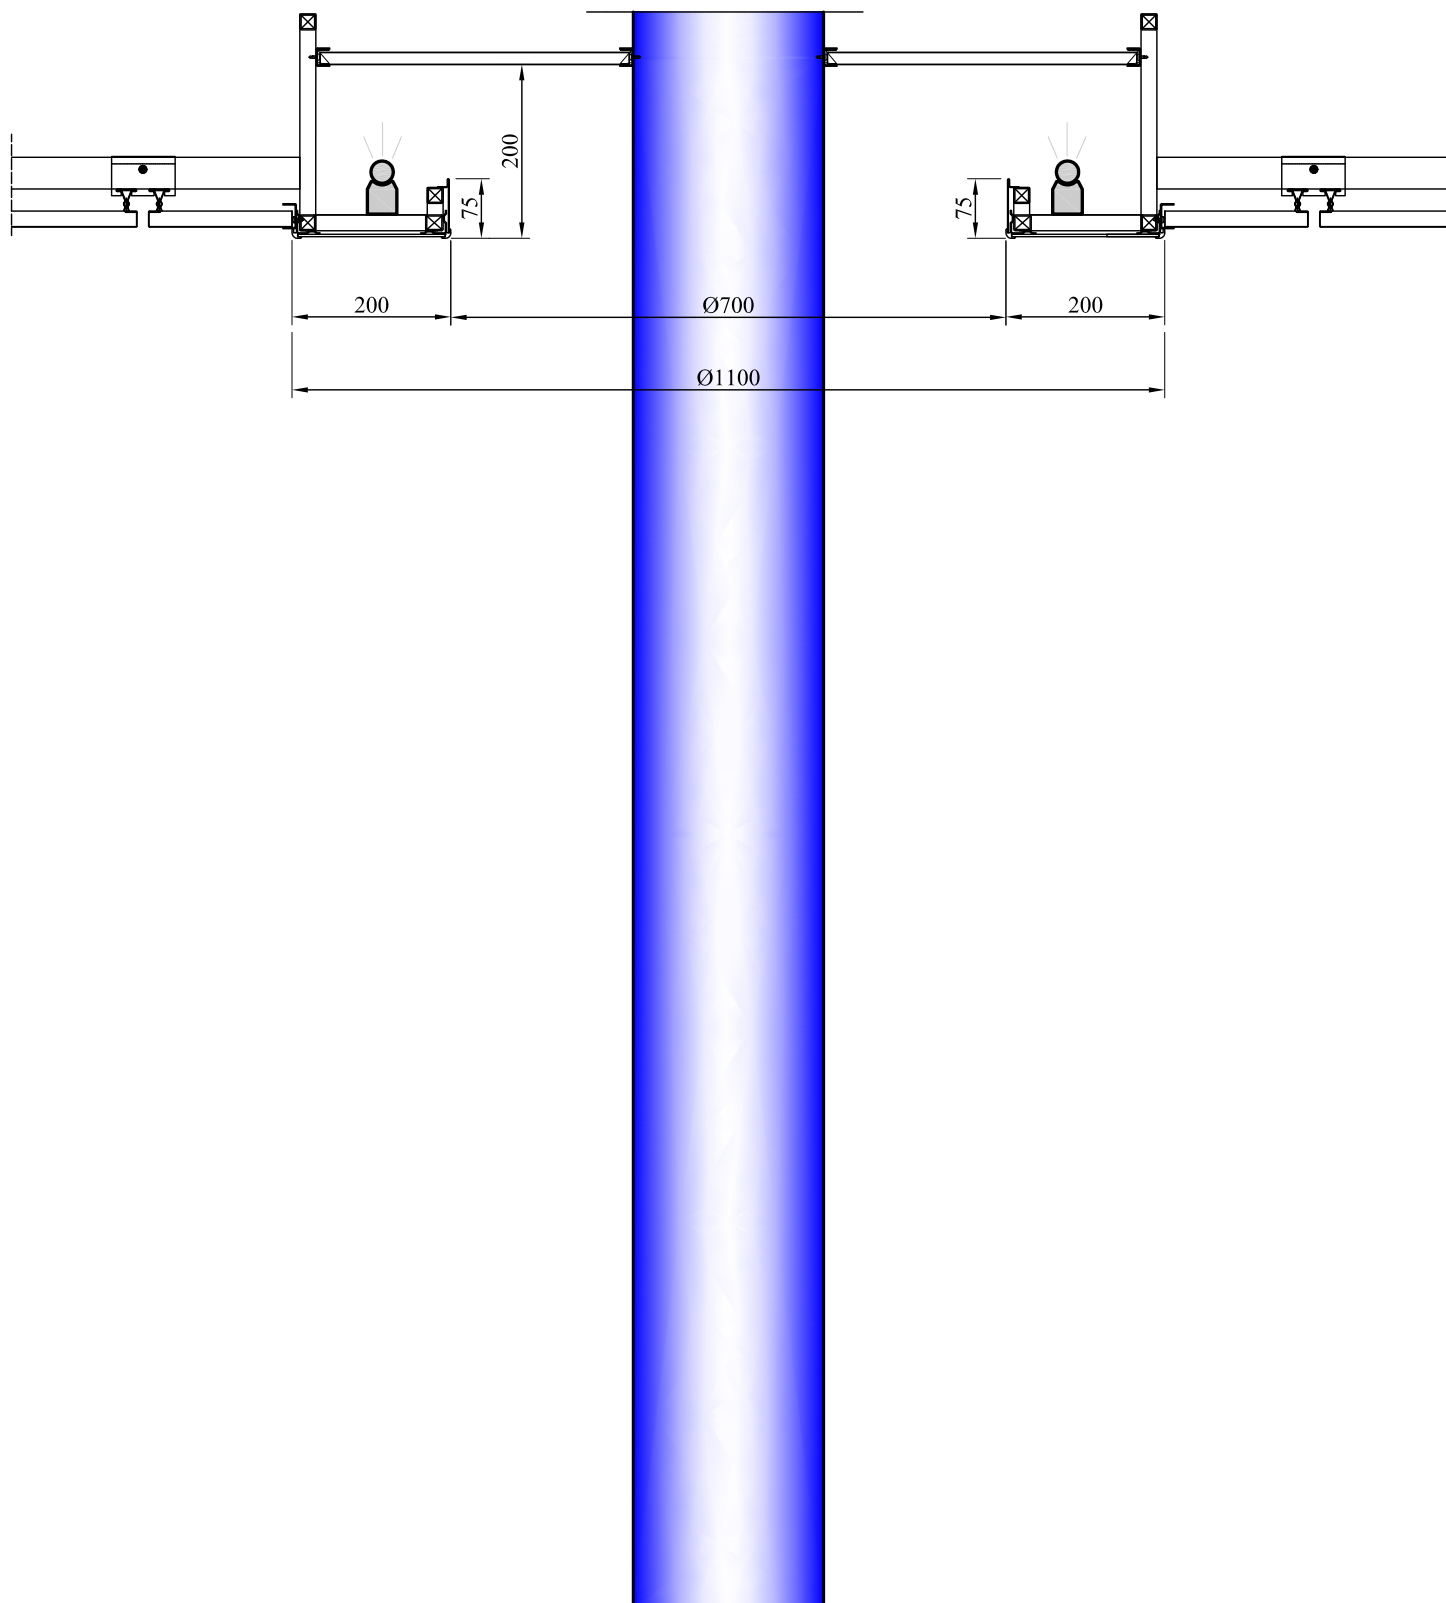



Section 1

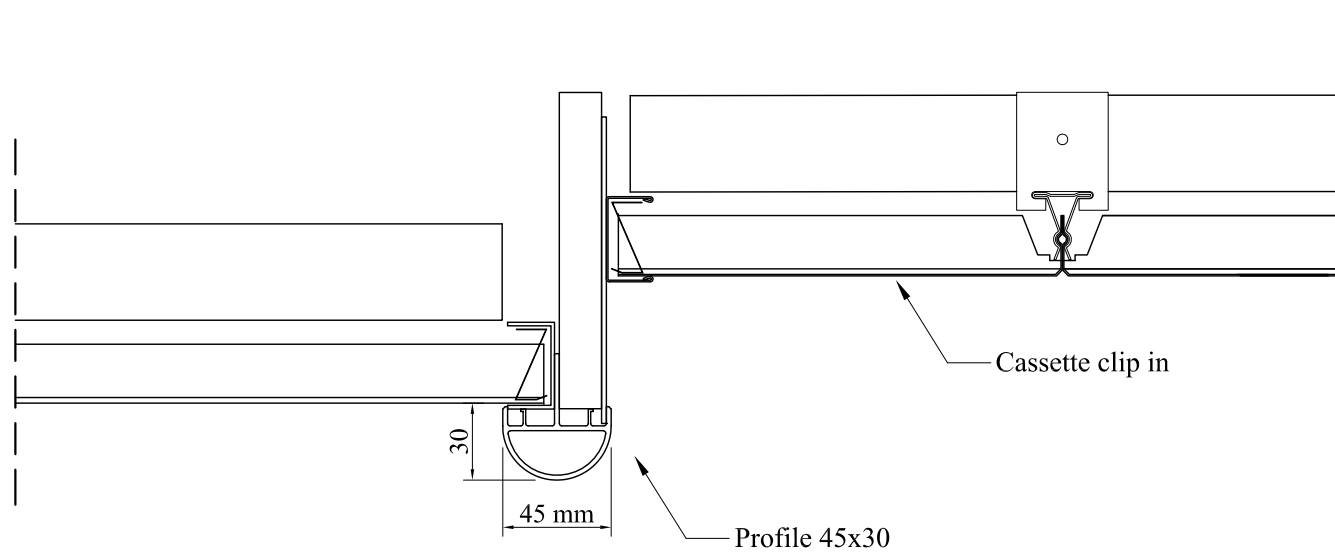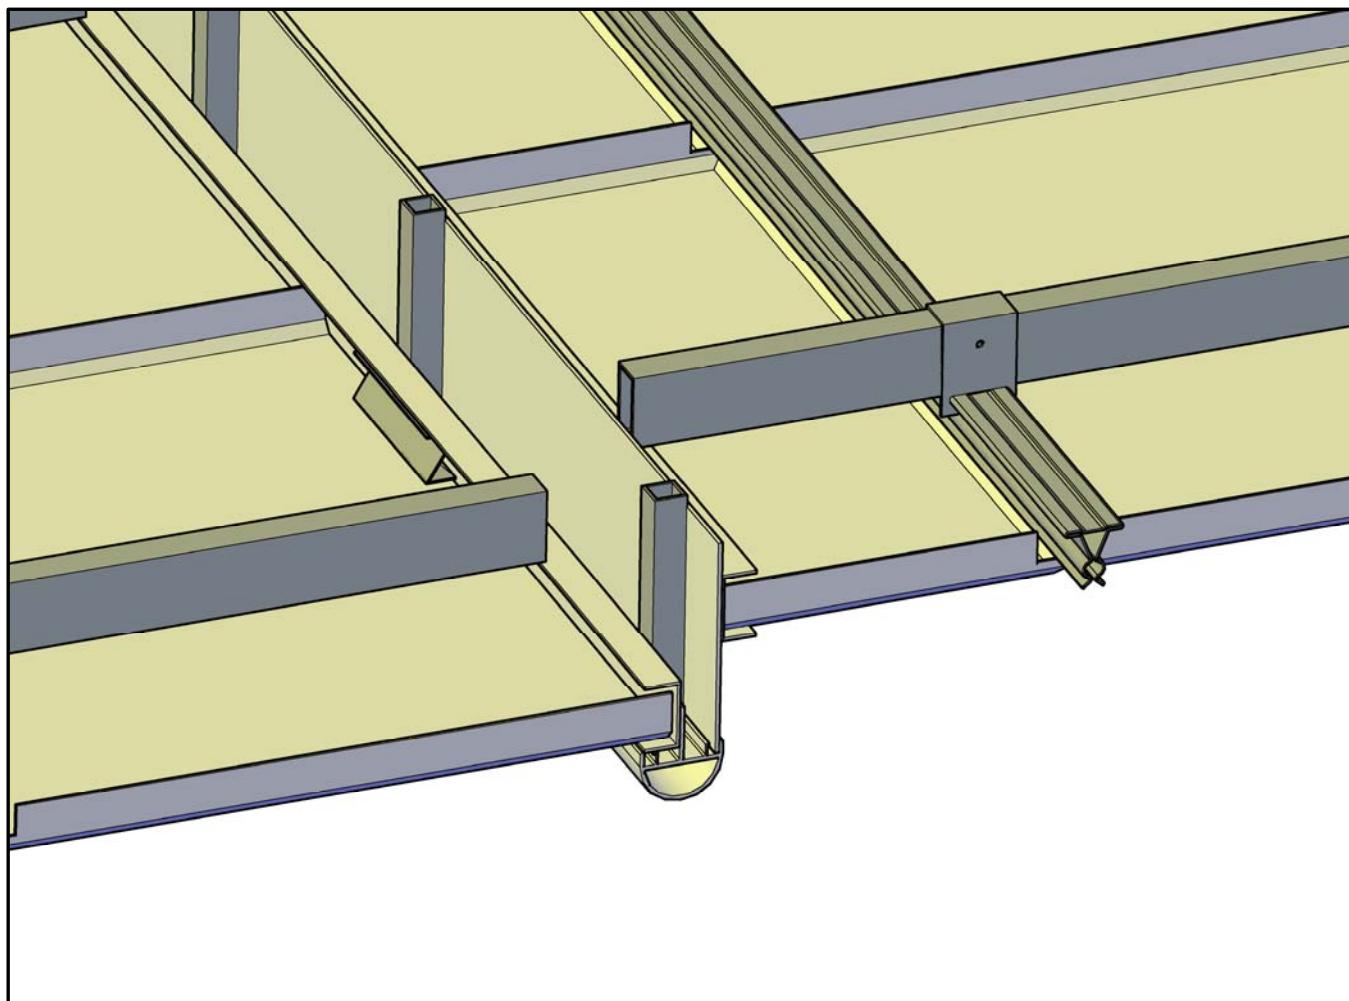



section 2

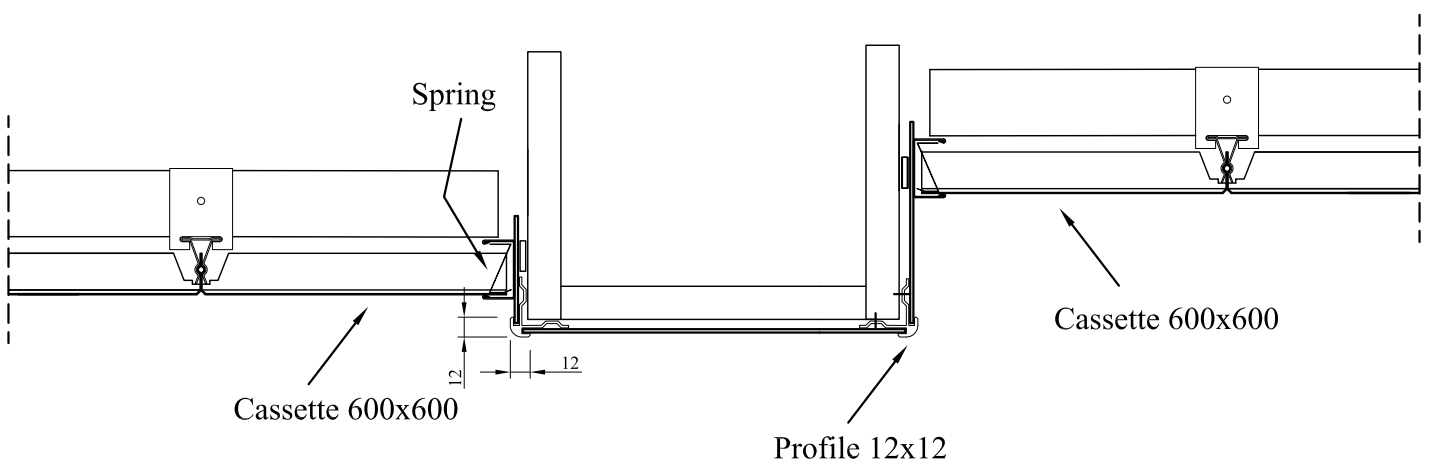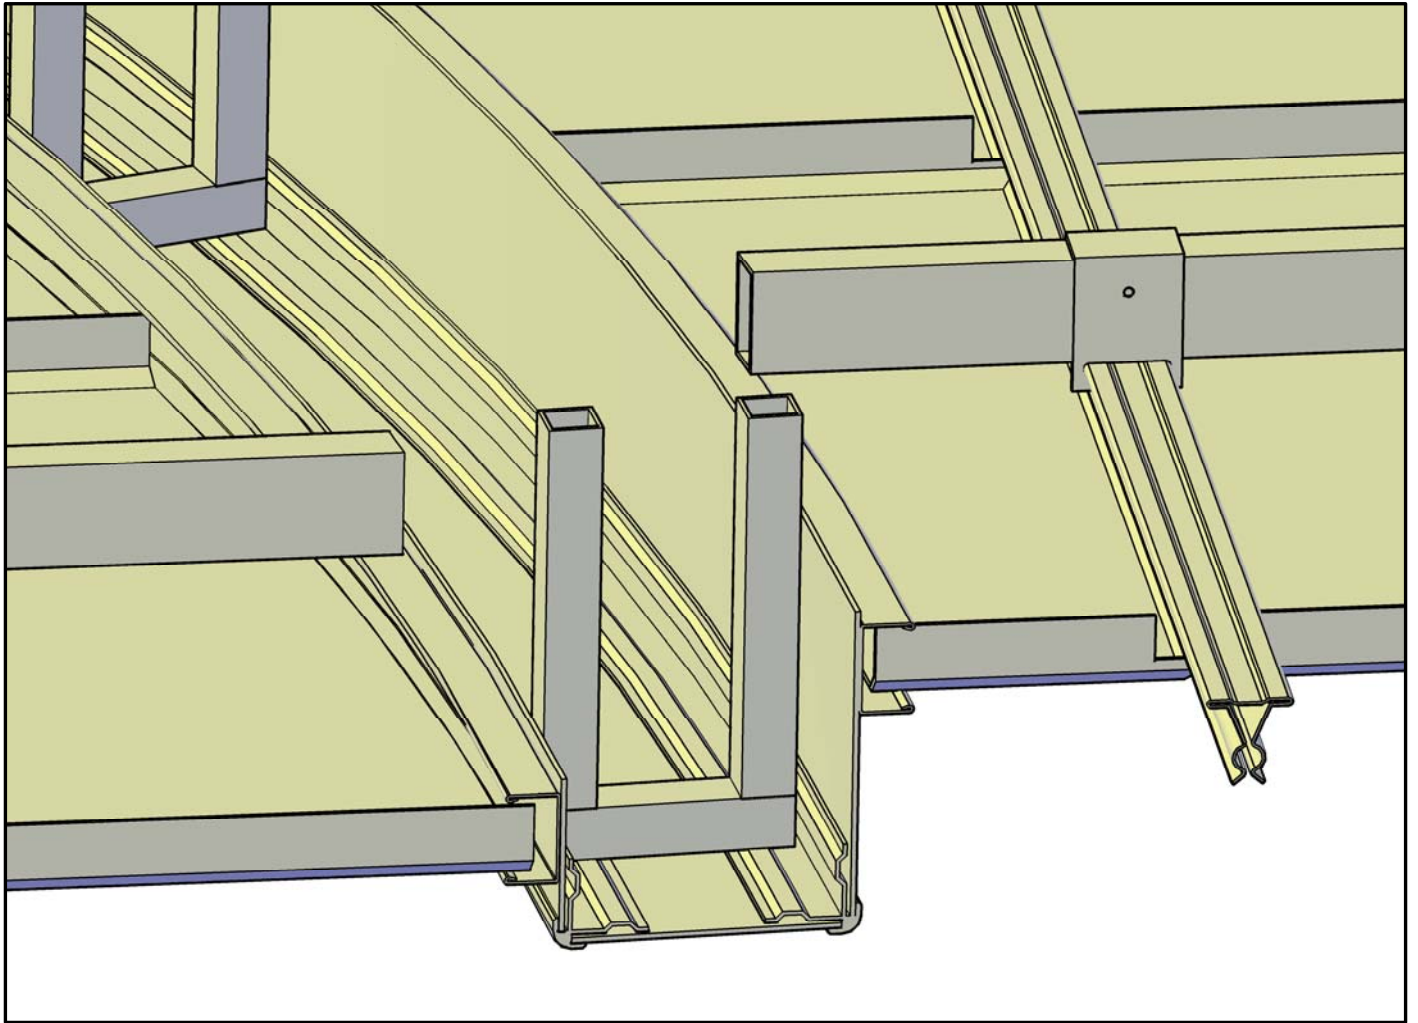



Section 3

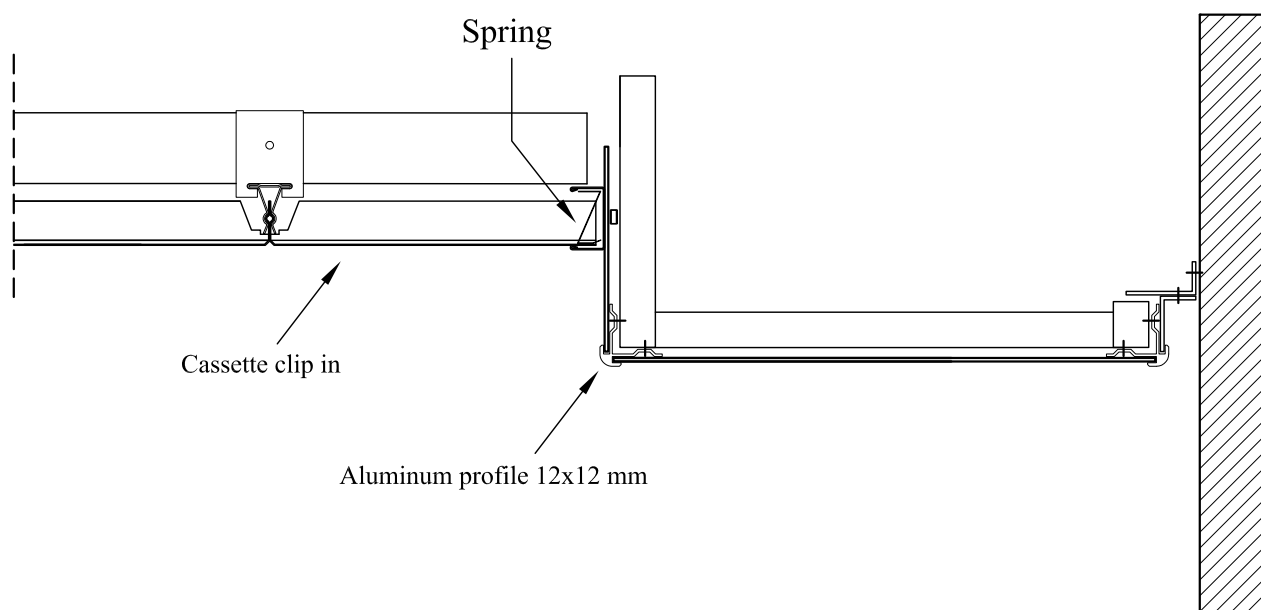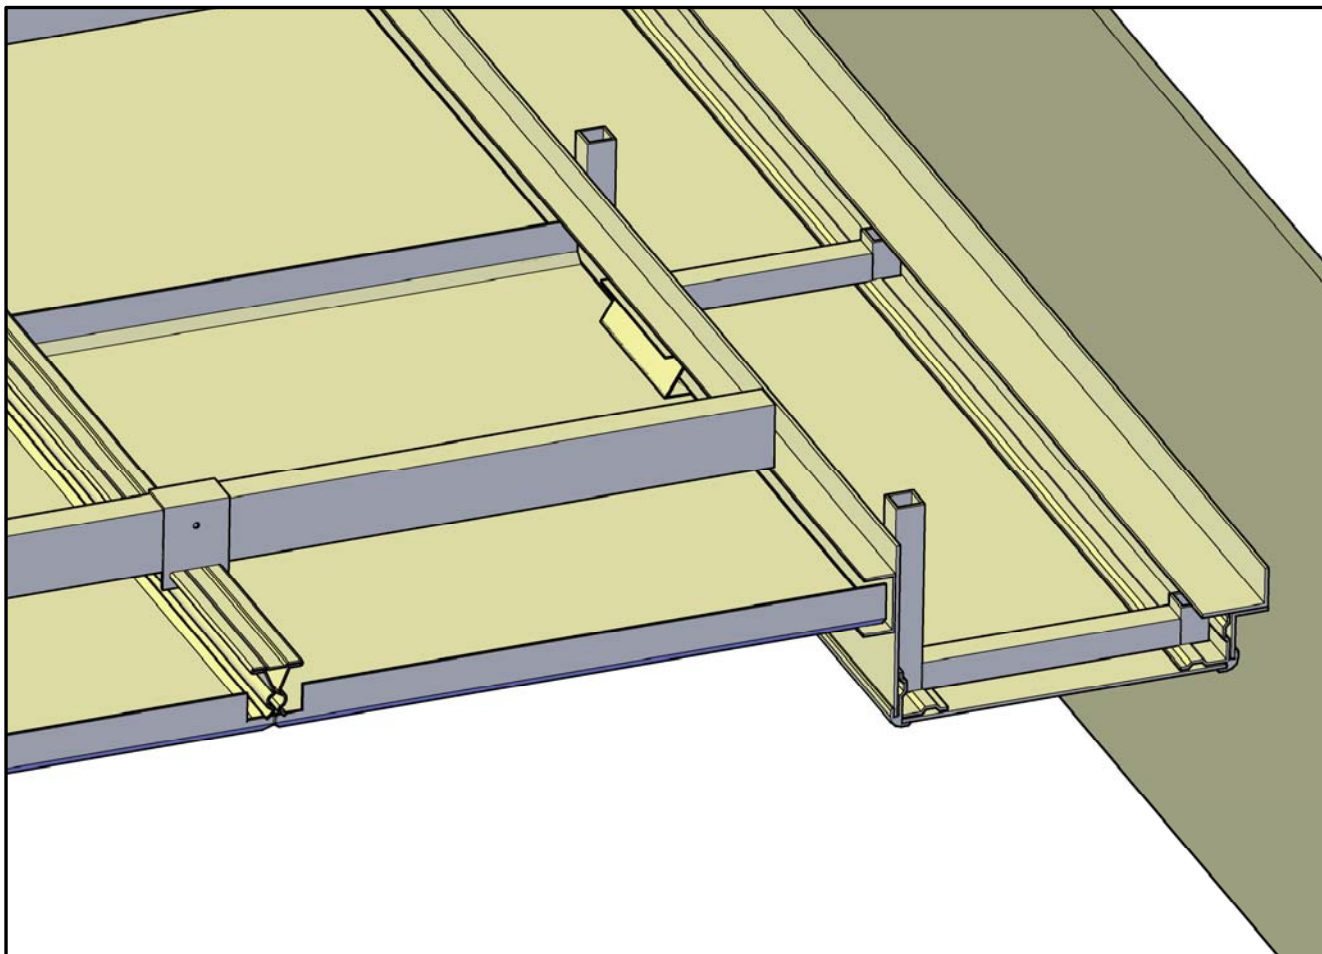


Section 4

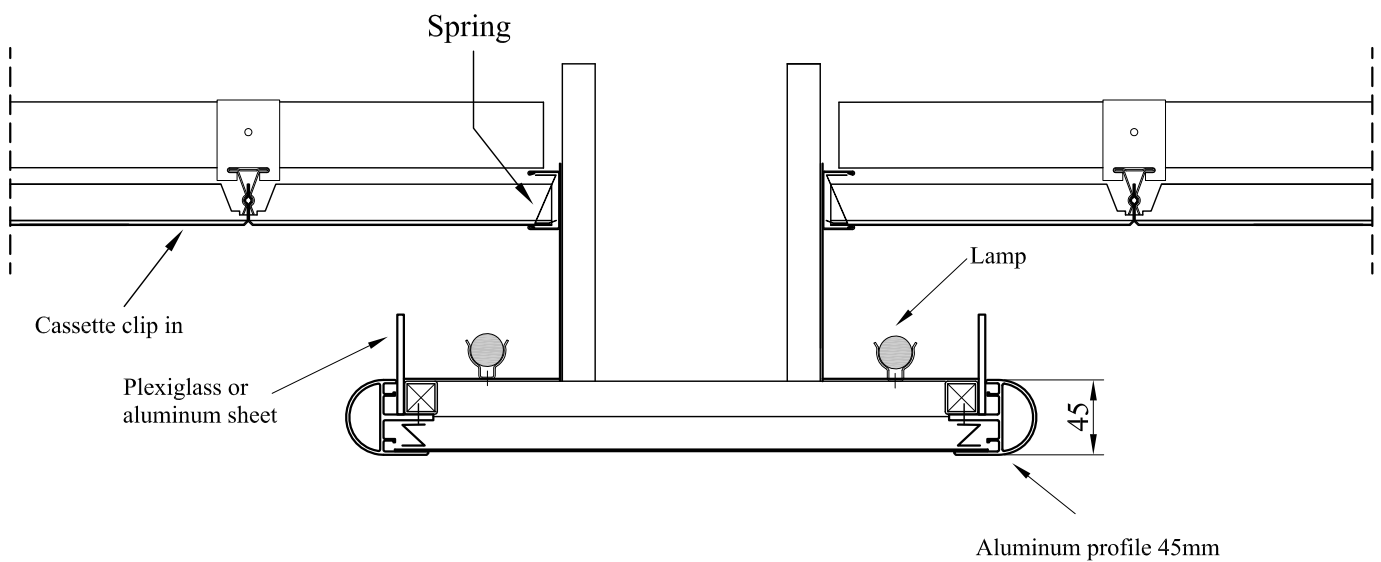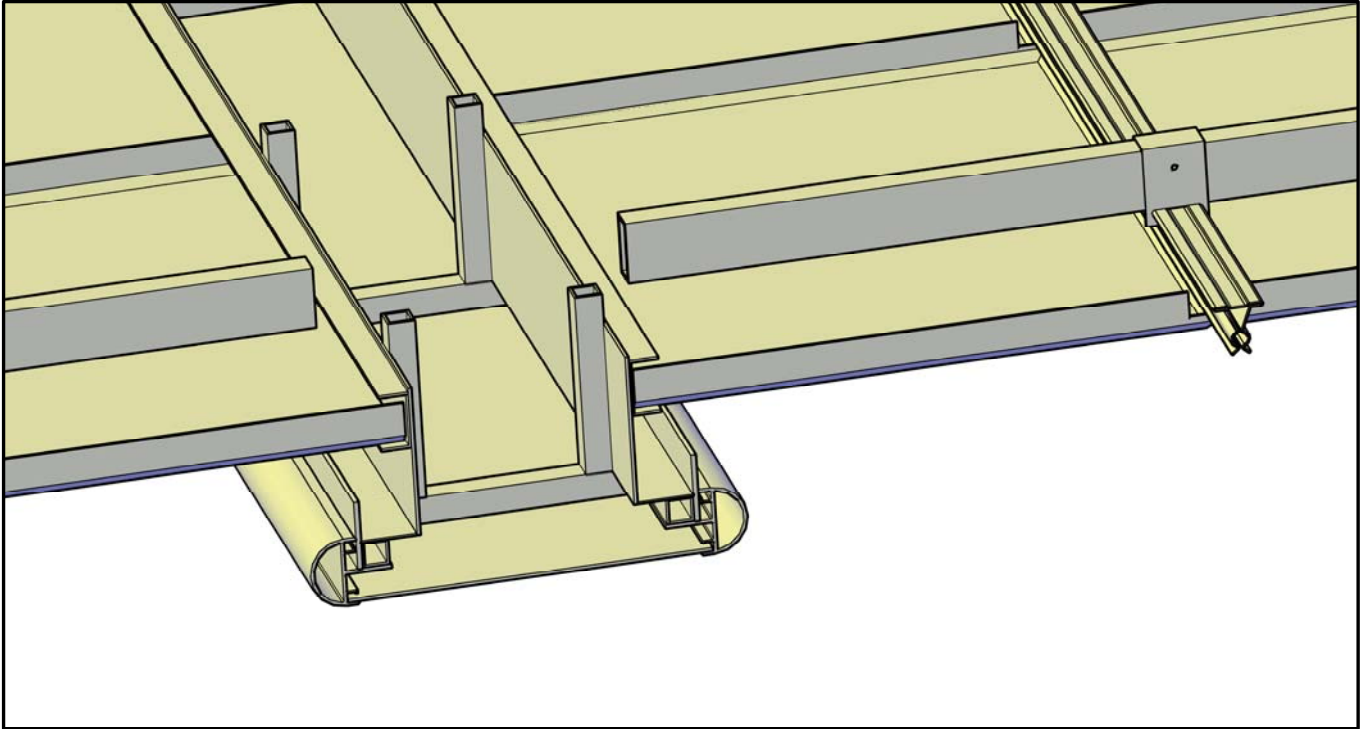

Section 5

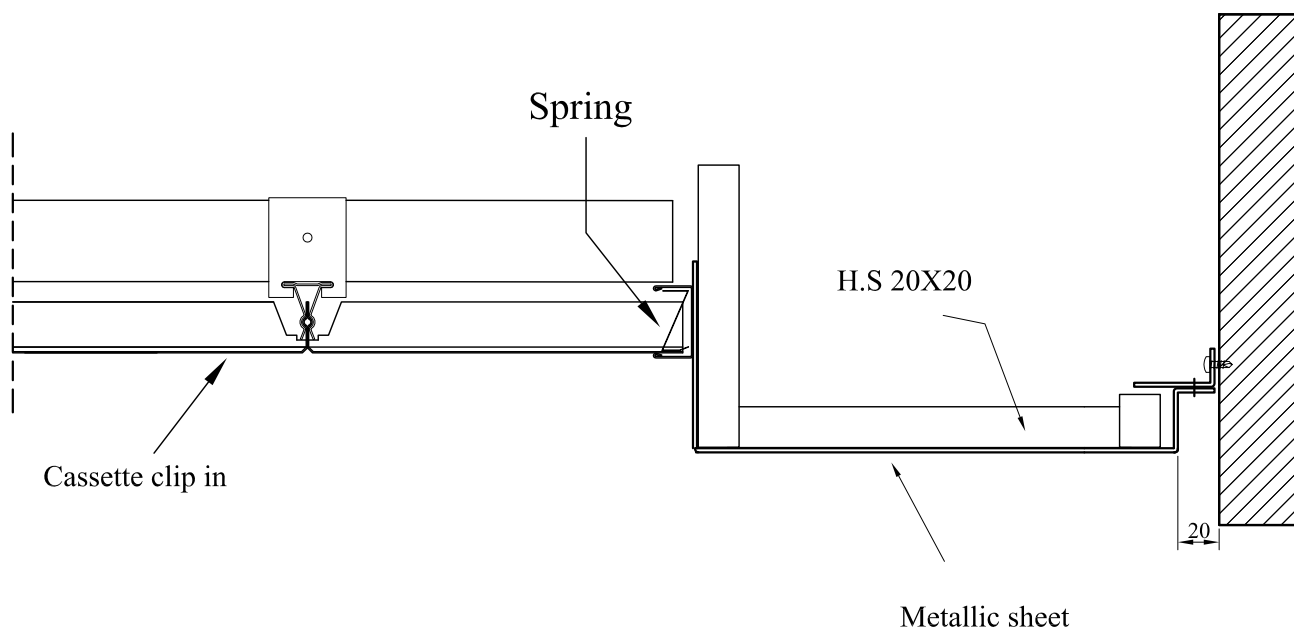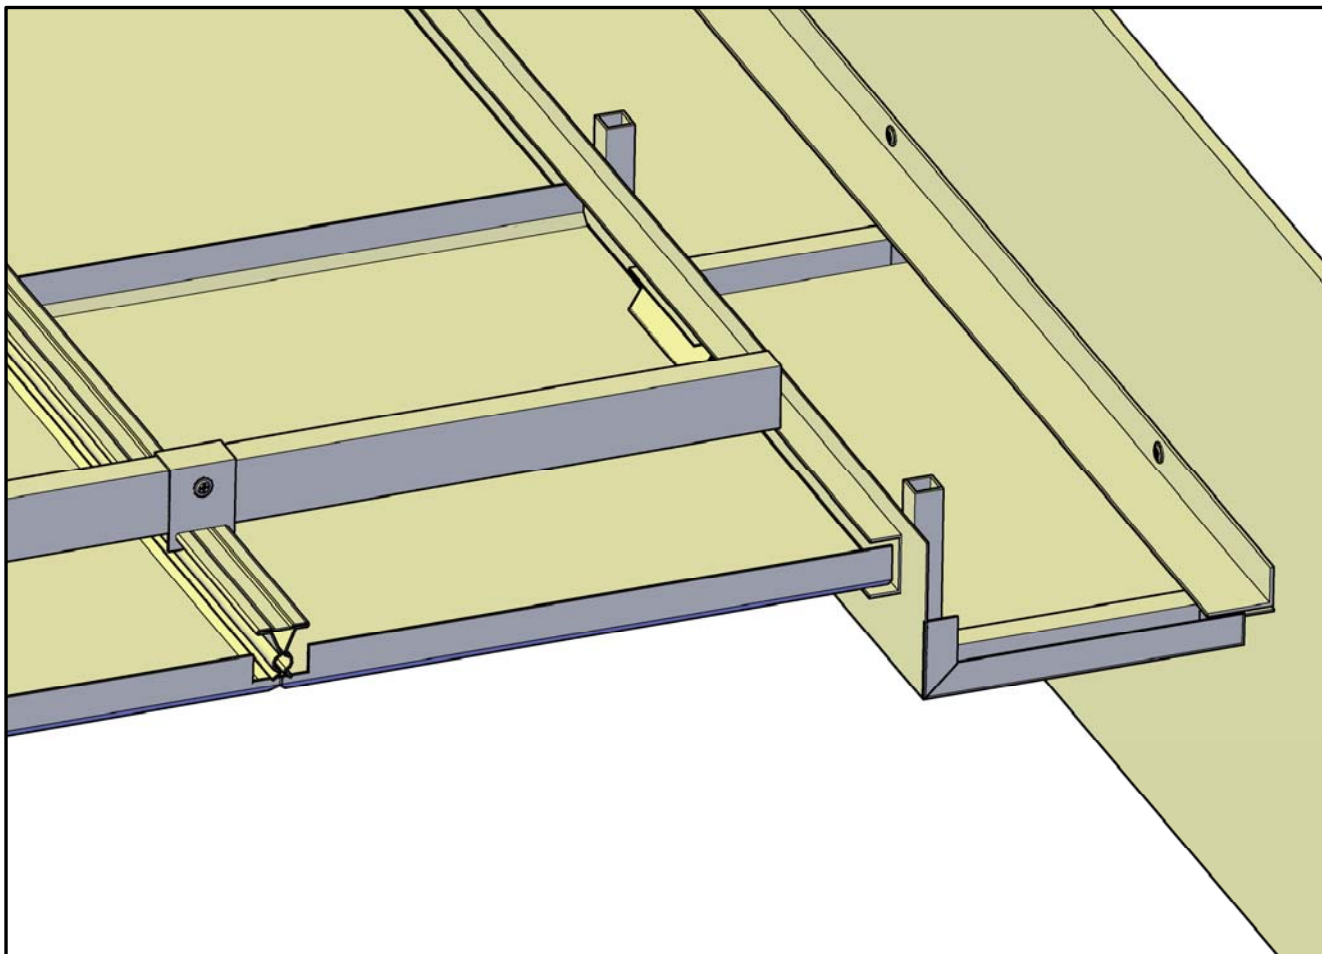


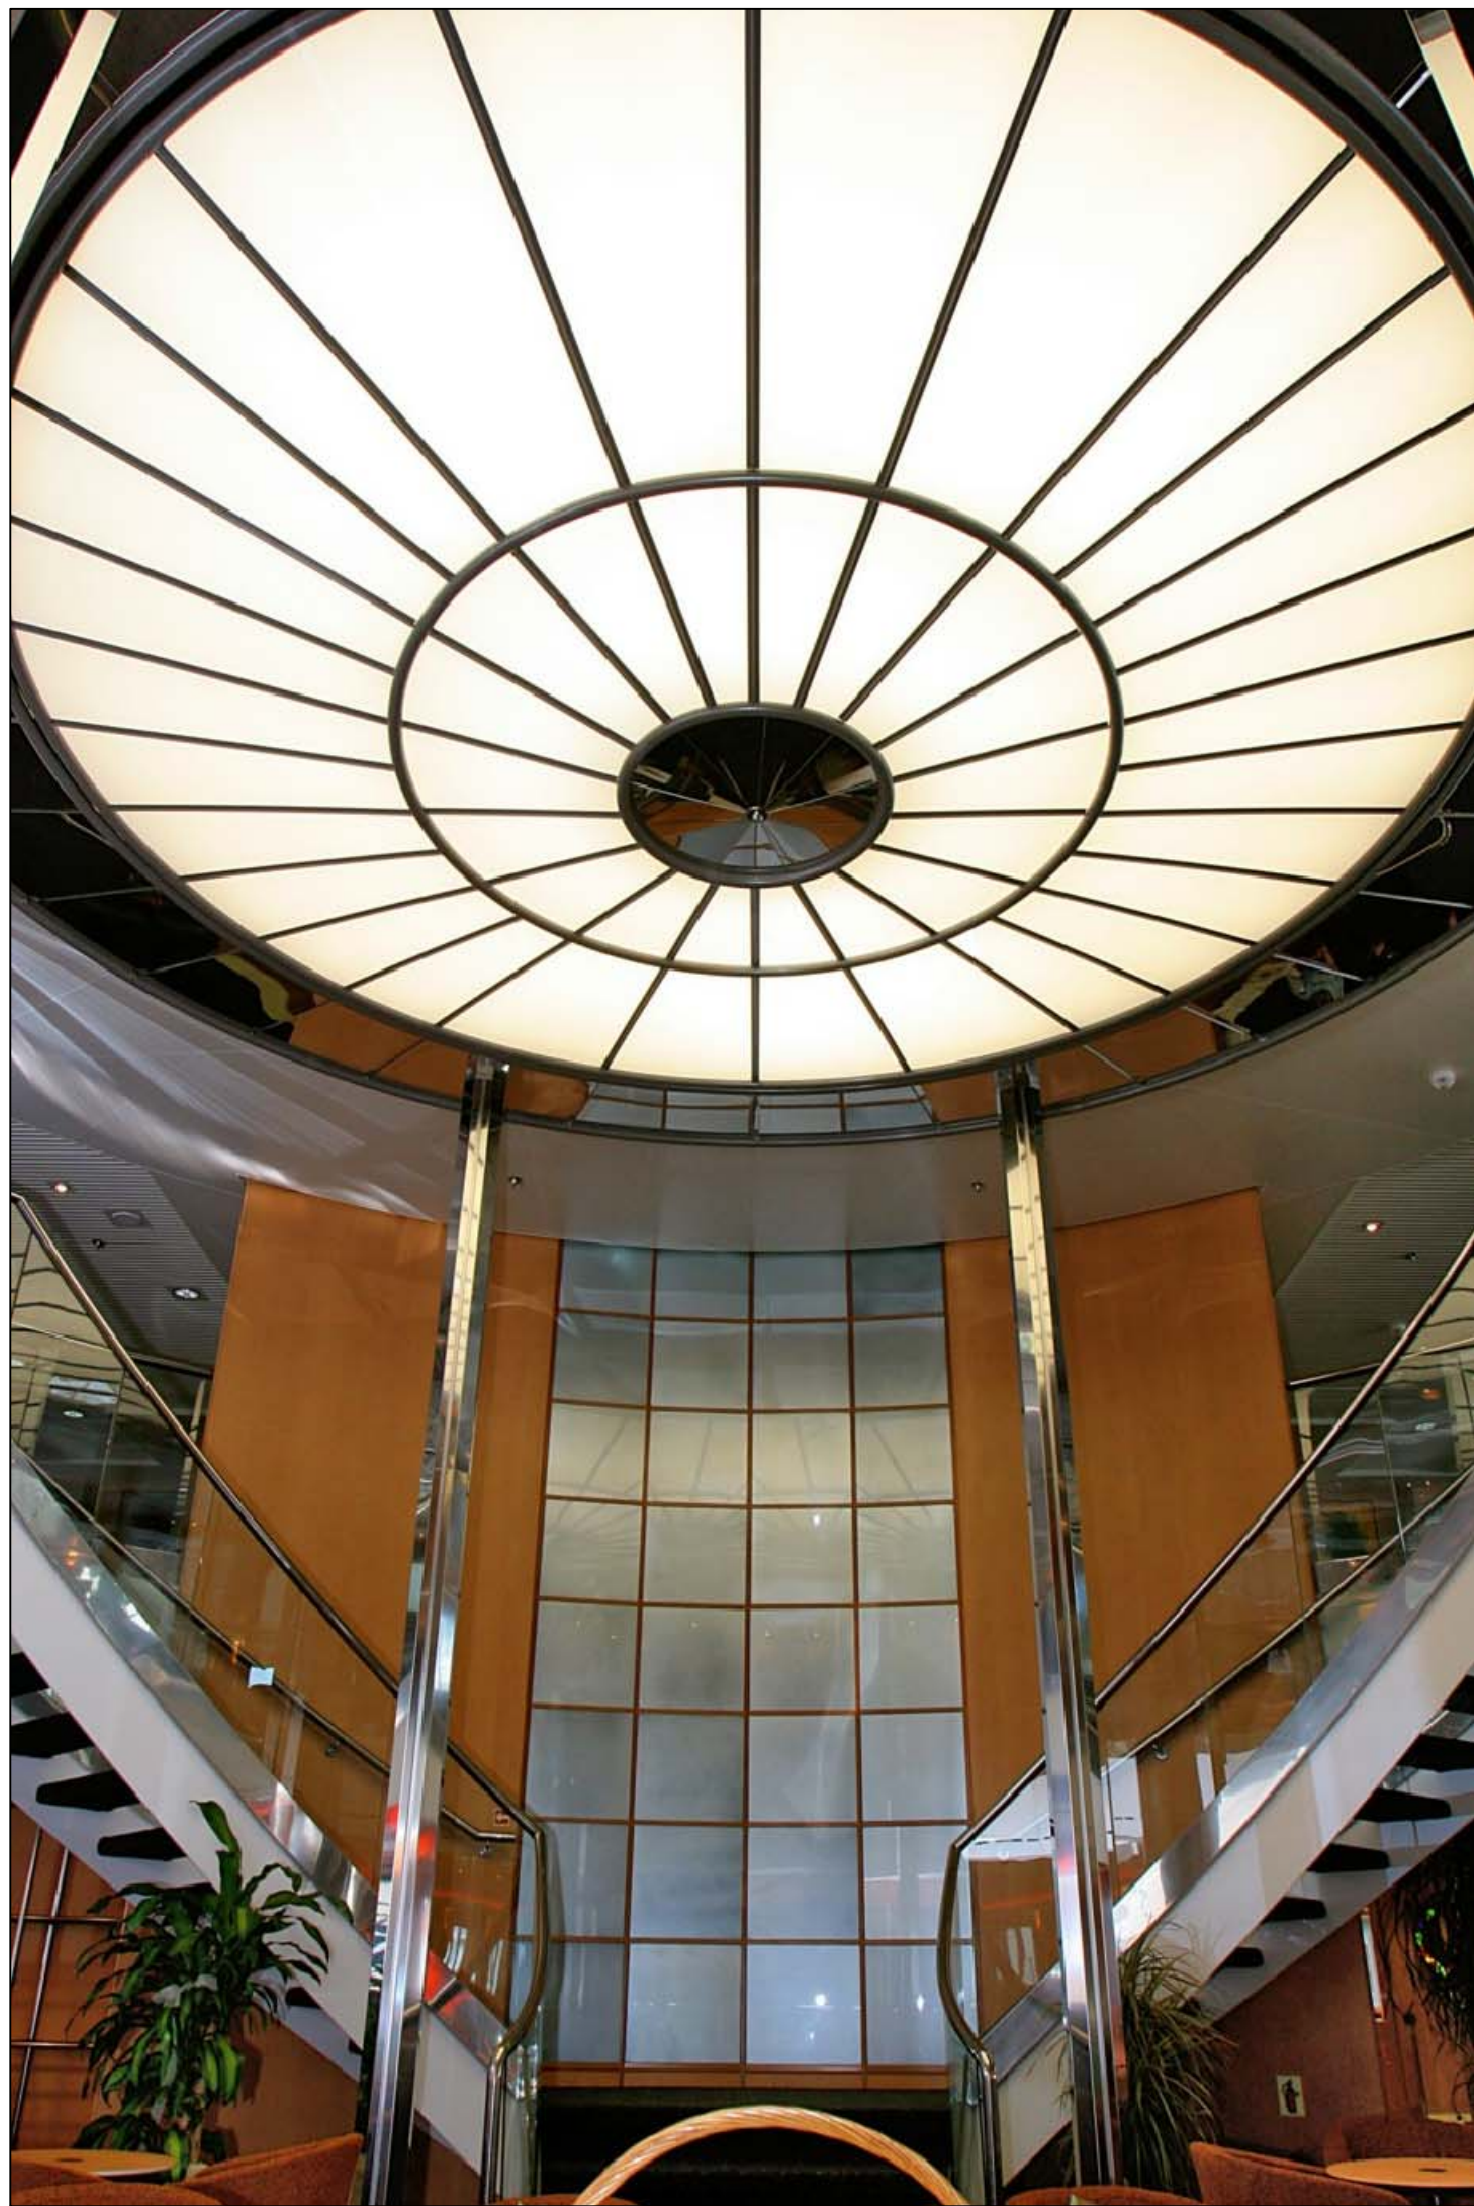






standard perforation patterns - square pitch

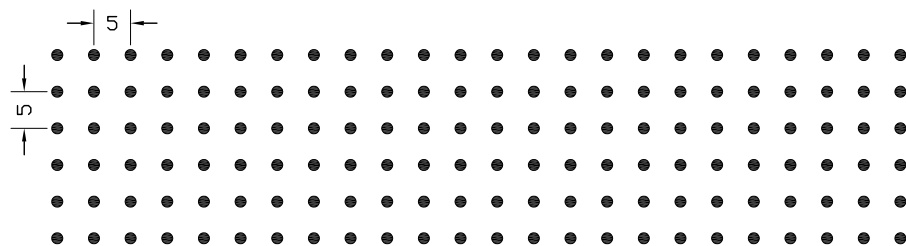


hole : Ø1.5 mm

perforation : 7 %

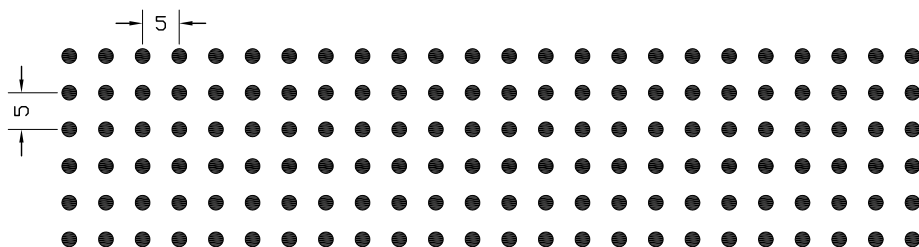


hole : Ø2 mm

perforation : 12.5 %

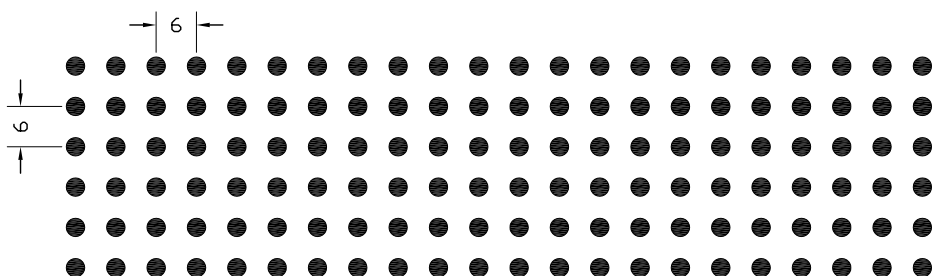


hole : Ø2.5 mm

perforation : 16 %

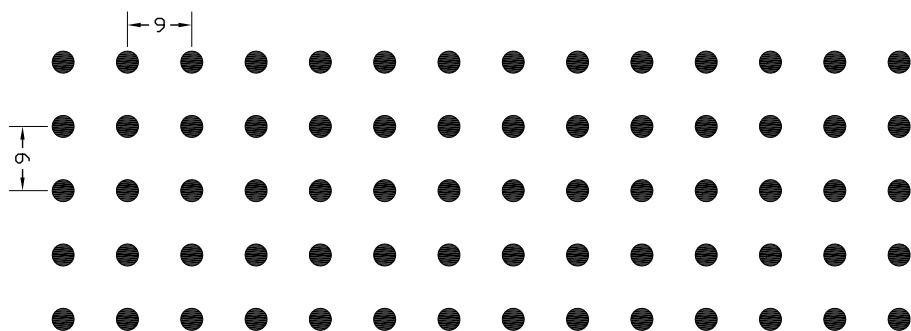

hole : Ø3.5 mm


perforation : 12.5 %

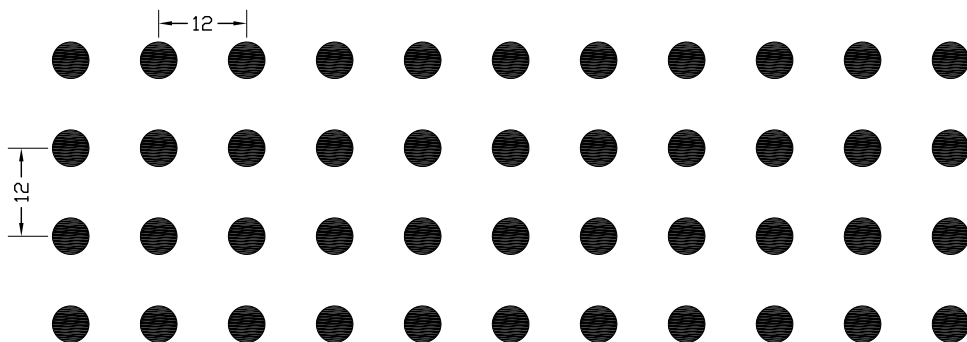


hole : Ø5 mm

perforation : 16 %


standard perforation patterns - diagonal pitch

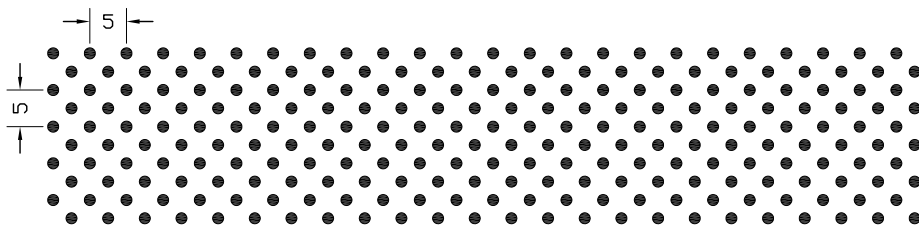


hole : Ø1.5 mm
perforation : 14 %

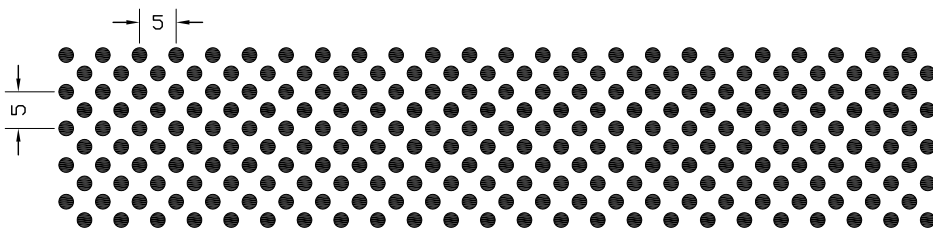


hole : Ø2 mm
perforation : 25 %

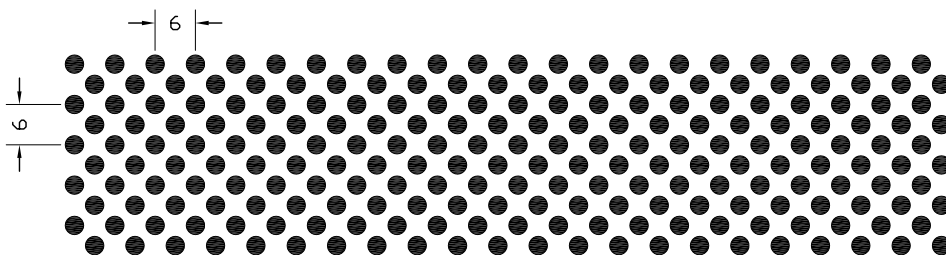

hole : Ø2.5 mm
perforation : 32 %

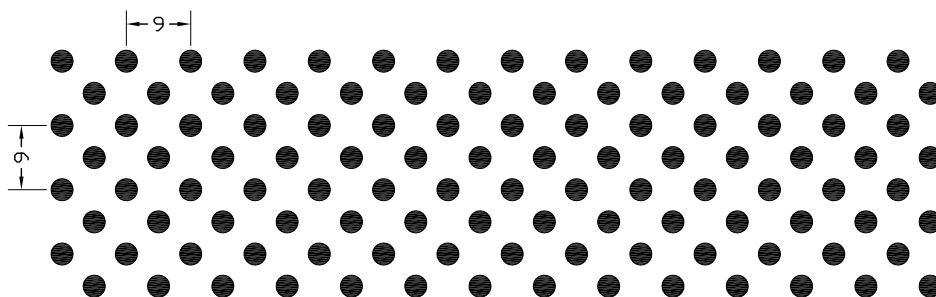


hole : Ø3.5 mm
perforation : 25 %

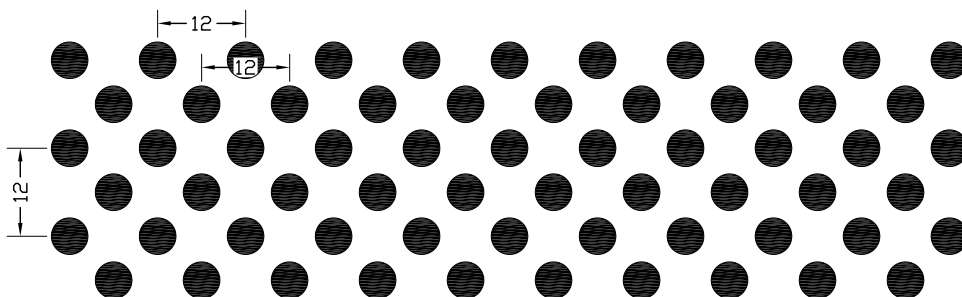


hole : Ø5 mm
perforation : 32 %

standard perforation patterns - square pitch

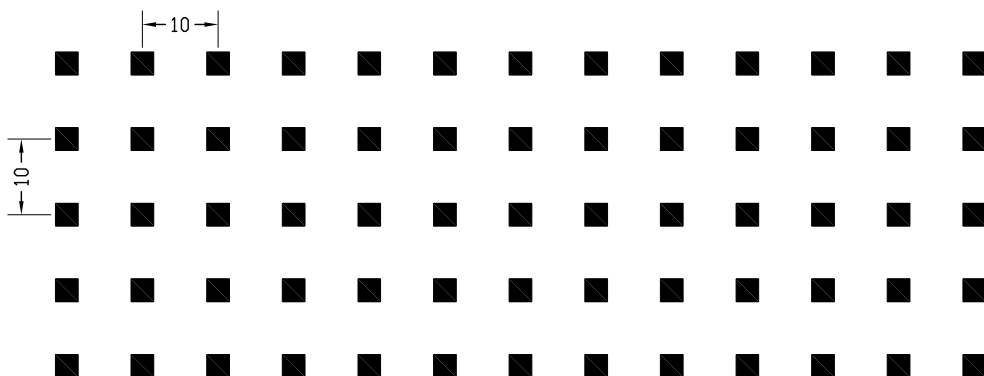

square : 3 mm
perforation : 9 %

standard perforation patterns - diagonal pitch

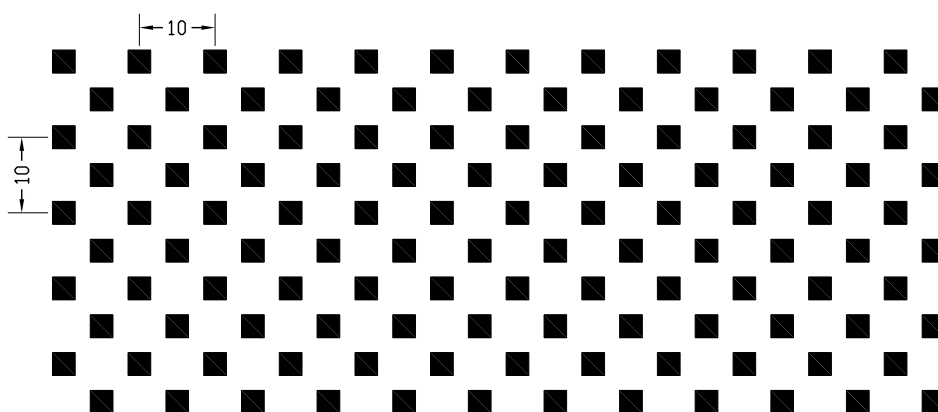

square : 3 mm
perforation : 18 %

